

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918156

Luminaire Tested: DFN2DIP-TR3F0-090D030US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918156
REPORT IS A COMBINATION OF REPORTS P900283 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-090D030US930-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9428.9 lumens
Efficiency: N/A
Efficacy: 80.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 117.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918156

CATALOG NUMBER: DFN2DIP-TR3F0-090D030US930-FLLFLL

Luminous Intensity Polar Plot

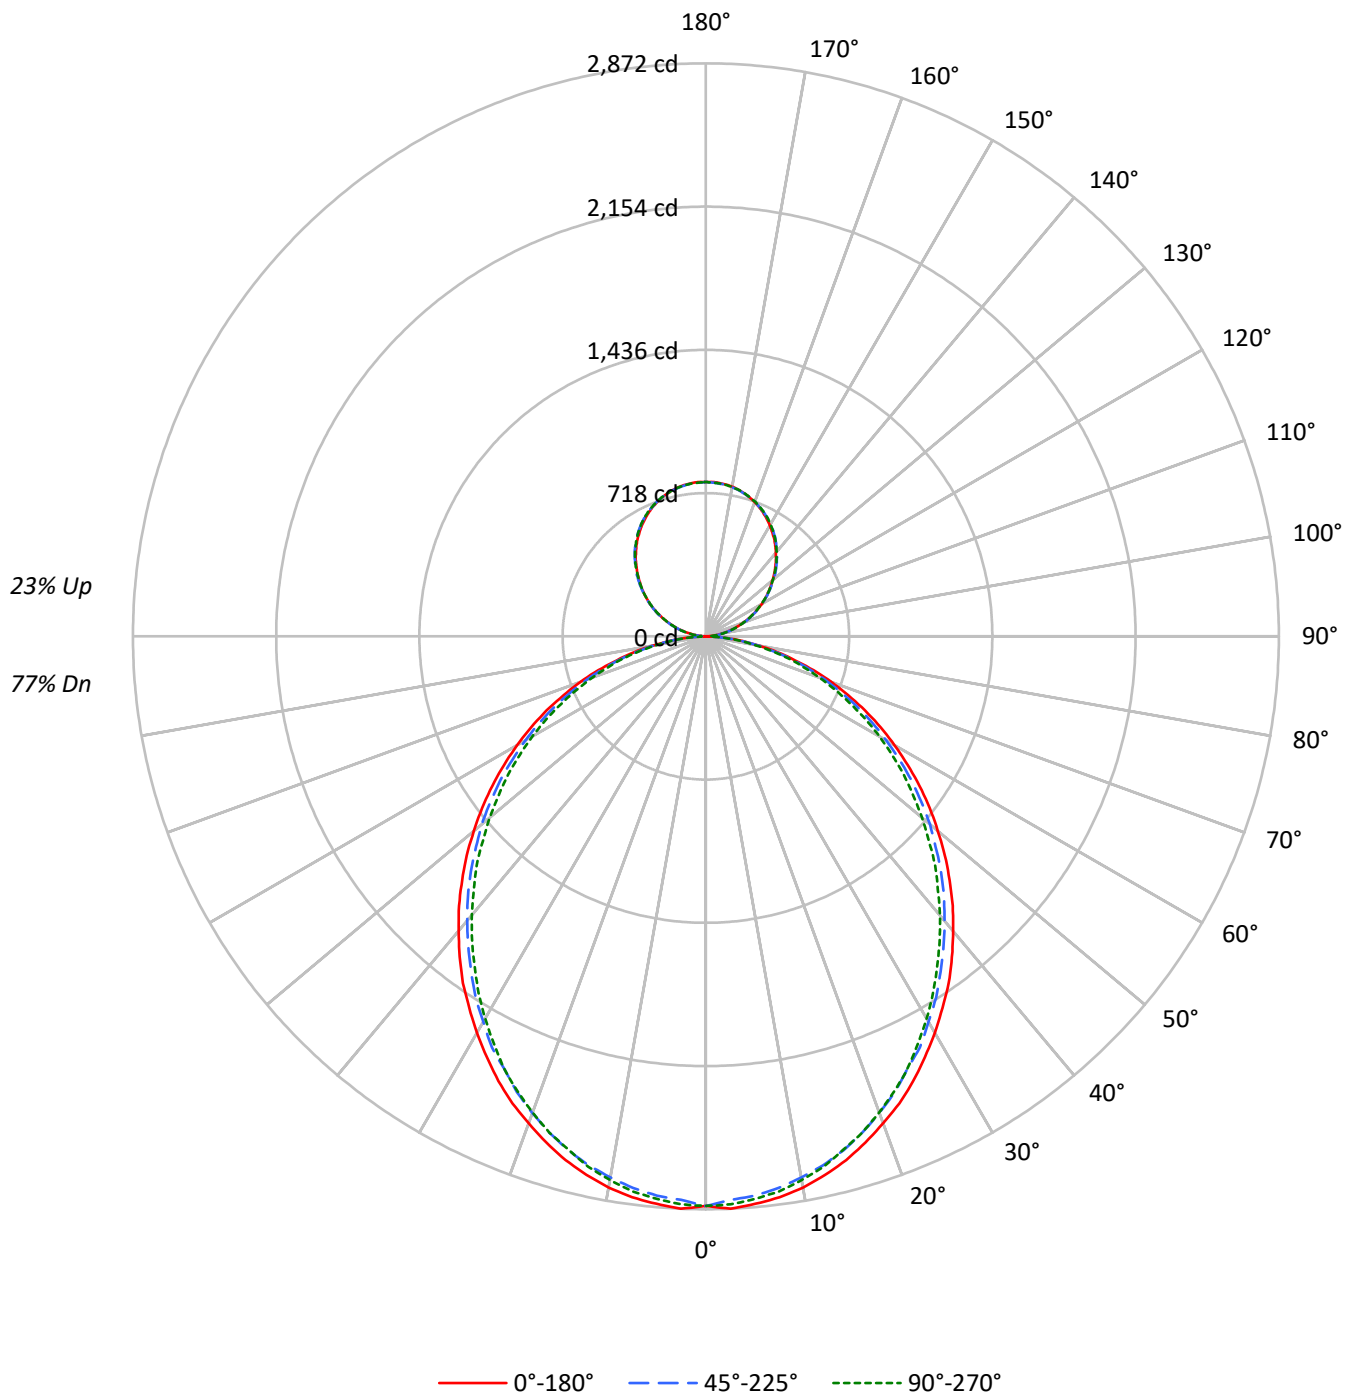

TEST NUMBER: P918156

CATALOG NUMBER: DFN2DIP-TR3F0-090D030US930-FLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	114	114	114	114	108	108	108	108	98	98	98	89	89	89	81	81	81
1	104	99	95	92	99	95	91	88	86	84	81	79	77	75	72	70	68
2	95	87	80	75	90	83	77	72	76	71	67	69	66	62	63	60	58
3	86	76	69	63	82	73	66	61	67	61	57	61	57	53	56	52	49
4	79	68	59	53	75	65	57	52	60	53	48	55	50	45	50	46	42
5	73	61	52	46	69	58	50	44	53	47	42	49	44	39	45	41	37
6	67	55	46	40	64	52	45	39	48	42	37	45	39	35	41	36	33
7	62	49	41	35	59	48	40	34	44	37	33	41	35	31	37	33	29
8	58	45	37	31	55	43	36	31	40	34	29	37	32	28	34	30	26
9	54	41	33	28	52	40	32	27	37	31	26	34	29	25	32	27	24
10	51	38	30	25	48	37	30	25	34	28	24	32	26	23	30	25	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3558	3558	3558
5°	3561	3505	3529
10°	3531	3455	3479
15°	3477	3395	3402
20°	3405	3313	3324
25°	3333	3216	3233
30°	3243	3125	3118
35°	3158	3018	2997
40°	3054	2910	2882
45°	2950	2801	2763
50°	2836	2687	2627
55°	2717	2556	2500
60°	2581	2400	2355
65°	2434	2238	2185
70°	2245	2040	2000
75°	1985	1803	1826
80°	1671	1500	1501
85°	1180	988	969

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2950 cd/sqm

TEST NUMBER: P918156

CATALOG NUMBER: DFN2DIP-TR3F0-090D030US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	268.7	2.9
10°-20°	756.1	8.0
20°-30°	1111.2	11.8
30°-40°	1290.5	13.7
40°-50°	1288.9	13.7
50°-60°	1123.9	11.9
60°-70°	830.8	8.8
70°-80°	470.1	5.0
80°-90°	126.2	1.3
90°-100°	47.9	0.5
100°-110°	152.1	1.6
110°-120°	260.3	2.8
120°-130°	342.3	3.6
130°-140°	384.2	4.1
140°-150°	376.8	4.0
150°-160°	316.1	3.4
160°-170°	209.6	2.2
170°-180°	73.3	0.8
0°-30°	2136.0	22.7
0°-40°	3426.5	36.3
0°-60°	5839.4	61.9
0°-90°	7266.5	77.1
90°-120°	460.2	4.9
90°-150°	1563.5	16.6
90°-180°	2162.0	22.9
0°-180°	9428.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2855	2855	2855	2855	2855	
5°	2855	2844	2814	2836	2831	271
15°	2718	2702	2666	2677	2663	765
25°	2460	2438	2391	2397	2391	1132
35°	2122	2095	2051	2034	2021	1325
45°	1727	1708	1666	1636	1625	1333
55°	1307	1290	1257	1225	1211	1169
65°	881	865	837	813	799	871
75°	461	456	442	426	431	492
85°	112	110	107	99	96	125
90°	1	8	23	21	22	9
95°	34	41	42	42	41	38
105°	140	142	144	145	145	148
115°	261	265	264	263	261	258
125°	380	386	384	382	381	339
135°	491	499	500	499	497	380
145°	597	601	605	606	603	373
155°	682	684	686	689	687	314
165°	742	741	741	746	743	209
175°	772	770	769	774	770	73
180°	774	774	774	774	774	

TEST NUMBER: P918156

CATALOG NUMBER: DFN2DIP-TR3F0-090D030US930-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2855.1	2855.1	2855.1	2855.1	2855.1
2.5°	2871.7	2858.0	2827.8	2855.1	2849.9
5°	2855.1	2844.3	2814.1	2835.9	2830.6
7.5°	2835.9	2819.6	2789.3	2811.5	2805.9
10°	2805.9	2786.7	2753.8	2775.6	2767.4
12.5°	2764.5	2748.2	2715.4	2729.0	2723.5
15°	2718.0	2701.7	2665.8	2676.9	2663.2
17.5°	2660.2	2643.9	2608.1	2621.8	2608.1
20°	2597.1	2580.7	2542.3	2550.4	2539.7
22.5°	2534.1	2509.4	2473.5	2473.5	2468.0
25°	2459.8	2438.0	2391.4	2396.7	2391.4
27.5°	2377.4	2358.2	2322.7	2314.6	2300.9
30°	2295.3	2273.1	2232.0	2223.9	2212.9
32.5°	2207.3	2191.0	2147.0	2130.5	2119.4
35°	2122.3	2094.9	2050.9	2034.3	2020.6
37.5°	2026.2	2001.4	1957.4	1938.2	1924.5
40°	1927.4	1905.3	1861.2	1836.8	1825.8
42.5°	1831.2	1809.1	1765.4	1737.8	1721.5
45°	1727.0	1707.8	1666.4	1636.4	1625.4
47.5°	1625.4	1606.1	1562.1	1531.9	1515.6
50°	1518.2	1504.5	1466.0	1427.6	1413.9
52.5°	1413.9	1394.6	1359.1	1328.9	1309.6
55°	1307.0	1290.4	1257.4	1224.6	1210.9
57.5°	1199.8	1186.1	1150.3	1117.4	1106.3
60°	1092.6	1081.8	1043.3	1013.1	1004.9
62.5°	988.3	969.1	941.7	914.4	903.3
65°	881.4	864.8	837.4	812.7	799.0
67.5°	771.6	757.7	733.1	714.0	702.9
70°	669.9	658.8	634.1	614.9	604.1
72.5°	565.7	554.6	540.9	521.7	513.6
75°	461.1	455.8	441.9	425.6	431.1
77.5°	367.9	356.9	351.3	343.2	335.0
80°	274.7	271.7	266.2	258.0	252.6
82.5°	186.7	186.7	184.1	173.0	173.0
85°	112.4	109.8	107.2	98.7	96.1
87.5°	49.5	43.9	38.5	30.3	27.4
90°	0.7	8.4	22.8	21.4	22.2
92.5°	14.4	19.6	20.3	21.0	21.0
95°	34.1	40.6	41.7	41.7	40.6
97.5°	56.7	62.7	65.3	65.3	65.3
100°	82.8	88.1	90.0	90.0	89.4
102.5°	110.3	114.3	116.8	117.6	116.8
105°	140.4	142.3	143.7	144.8	144.8
107.5°	170.2	173.0	173.0	173.5	170.2
110°	199.2	202.9	202.9	202.9	201.1

TEST NUMBER: P918156

CATALOG NUMBER: DFN2DIP-TR3F0-090D030US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	230.4	234.4	233.7	231.8	230.4
115°	261.2	264.9	263.7	263.1	261.2
117.5°	291.7	296.9	293.6	291.7	289.8
120°	322.5	327.7	322.5	322.5	320.4
122.5°	350.5	357.0	353.8	351.9	350.5
125°	379.9	385.7	383.8	381.7	381.1
127.5°	408.5	415.8	413.3	410.4	408.5
130°	435.4	443.8	442.6	441.2	438.6
132.5°	465.5	472.0	472.5	469.2	467.3
135°	491.4	498.6	500.0	499.3	497.4
137.5°	520.2	526.1	527.3	526.8	524.0
140°	545.7	551.5	554.8	554.8	552.2
142.5°	571.9	577.6	579.5	580.2	577.6
145°	596.6	601.2	605.0	605.6	603.1
147.5°	618.7	624.5	627.3	628.5	625.9
150°	641.6	645.6	648.1	650.2	648.1
152.5°	661.9	665.8	669.0	671.6	669.0
155°	682.2	684.0	686.1	689.3	687.3
157.5°	699.6	701.0	702.2	706.9	703.6
160°	715.3	716.6	717.4	721.3	718.5
162.5°	729.7	729.7	730.4	734.8	731.6
165°	742.1	741.4	741.4	746.0	742.7
167.5°	753.3	751.1	751.1	755.8	752.5
170°	761.7	759.8	759.1	763.8	759.8
172.5°	767.4	765.6	764.9	769.6	765.6
175°	772.2	770.3	768.9	773.6	769.6
177.5°	774.7	772.8	771.4	775.4	771.4
180°	773.6	773.6	773.6	773.6	773.6

TEST NUMBER: P918156

CATALOG NUMBER: DFN2DIP-TR3F0-090D030US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.83	15.00	14.51	15.70	16.53	13.40	14.57	14.08	15.27	16.10
	3H	15.50	16.55	16.20	17.27	18.12	15.03	16.09	15.73	16.80	17.66
	4H	16.10	17.09	16.81	17.81	18.68	15.63	16.62	16.35	17.35	18.22
	6H	16.50	17.42	17.23	18.16	19.04	16.04	16.95	16.77	17.69	18.57
	8H	16.61	17.49	17.35	18.24	19.13	16.15	17.02	16.89	17.77	18.66
	12H	16.67	17.50	17.42	18.25	19.16	16.20	17.03	16.94	17.78	18.69
4H	2H	14.32	15.32	15.04	16.04	16.91	13.98	14.97	14.70	15.70	16.57
	3H	16.20	17.04	16.94	17.79	18.68	15.82	16.65	16.55	17.41	18.29
	4H	16.92	17.68	17.67	18.44	19.36	16.52	17.28	17.27	18.04	18.96
	6H	17.45	18.10	18.21	18.89	19.81	17.04	17.70	17.81	18.48	19.41
	8H	17.60	18.21	18.37	18.99	19.93	17.19	17.81	17.97	18.59	19.52
	12H	17.68	18.23	18.48	19.04	19.98	17.27	17.82	18.06	18.62	19.57
8H	4H	17.14	17.75	17.91	18.54	19.47	16.78	17.40	17.56	18.18	19.12
	6H	17.77	18.28	18.58	19.11	20.04	17.42	17.92	18.22	18.75	19.69
	8H	17.99	18.44	18.80	19.27	20.22	17.63	18.08	18.44	18.90	19.86
	12H	18.13	18.53	18.95	19.34	20.36	17.75	18.15	18.57	18.97	19.98
12H	4H	17.14	17.69	17.93	18.50	19.44	16.79	17.34	17.58	18.15	19.09
	6H	17.81	18.26	18.62	19.08	20.03	17.46	17.91	18.27	18.73	19.69
	8H	18.06	18.45	18.87	19.27	20.28	17.70	18.10	18.52	18.91	19.93