

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920736

Luminaire Tested: DFN2DIP-TR3F0-030D050US935-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920736
REPORT IS A COMBINATION OF REPORTS P900299 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-030D050US935-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6367.1 lumens
Efficiency: N/A
Efficacy: 104.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 61.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920736
CATALOG NUMBER: DFN2DIP-TR3F0-030D050US935-FLLFLL

Luminous Intensity Polar Plot

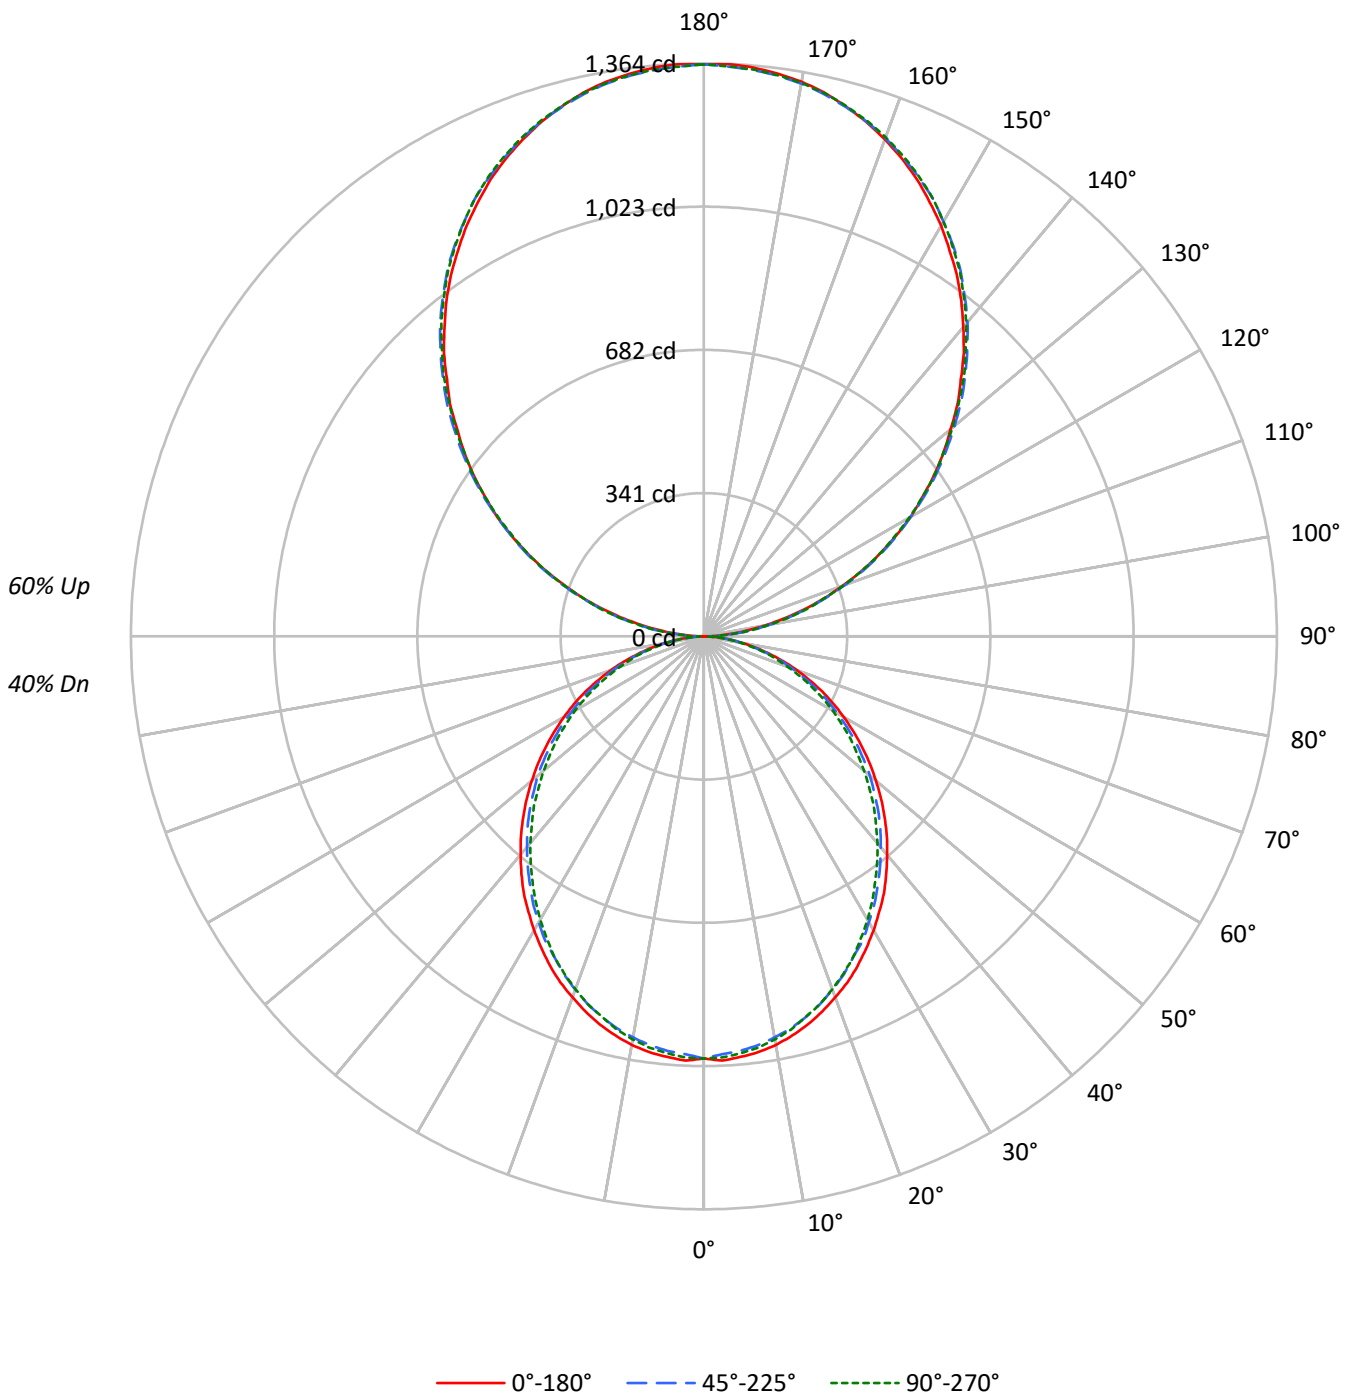



TEST NUMBER: P920736
 CATALOG NUMBER: DFN2DIP-TR3F0-030D050US935-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	47	47	47	40
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	42	41	40	40	40	40	34
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	33	33	33	33	28
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28	28	28	28	24
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	29	27	25	25	25	25	21
5	67	55	47	41	60	51	44	38	42	37	33	34	30	27	26	23	21	21	21	21	18
6	61	49	41	36	56	45	38	33	38	32	28	30	27	24	24	21	19	19	19	19	16
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17	17	17	17	14
8	52	40	33	28	48	37	30	26	31	26	22	25	21	18	20	17	15	15	15	15	13
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	16	14	14	14	14	11
10	46	34	27	22	41	31	25	20	26	21	18	21	18	15	17	14	12	12	12	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1252	1252	1252
5°	1254	1234	1242
10°	1243	1216	1225
15°	1224	1195	1198
20°	1198	1166	1170
25°	1173	1132	1138
30°	1142	1100	1098
35°	1112	1062	1055
40°	1075	1024	1014
45°	1039	986	973
50°	998	946	925
55°	956	900	880
60°	909	845	829
65°	857	788	769
70°	790	718	704
75°	699	635	643
80°	588	528	528
85°	416	347	341

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1329 cd/sqm



TEST NUMBER: P920736

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US935-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.6	1.5
10°-20°	266.2	4.2
20°-30°	391.1	6.1
30°-40°	454.3	7.1
40°-50°	453.7	7.1
50°-60°	395.6	6.2
60°-70°	292.5	4.6
70°-80°	165.5	2.6
80°-90°	47.5	0.7
90°-100°	84.2	1.3
100°-110°	267.7	4.2
110°-120°	458.1	7.2
120°-130°	602.5	9.5
130°-140°	676.3	10.6
140°-150°	663.1	10.4
150°-160°	556.3	8.7
160°-170°	368.9	5.8
170°-180°	128.9	2.0
0°-30°	751.9	11.8
0°-40°	1206.2	18.9
0°-60°	2055.6	32.3
0°-90°	2561.0	40.2
90°-120°	810.0	12.7
90°-150°	2751.9	43.2
90°-180°	3806.0	59.8
0°-180°	6367.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1005	1005	1005	1005	1005	
5°	1005	1001	991	998	996	95
15°	957	951	938	942	938	269
25°	866	858	842	844	842	398
35°	747	737	722	716	711	467
45°	608	601	587	576	572	469
55°	460	454	443	431	426	411
65°	310	304	295	286	281	307
75°	162	160	156	150	152	173
85°	40	39	38	35	34	44
90°	1	15	40	38	39	6
95°	60	72	73	73	72	67
105°	247	250	253	255	255	261
115°	460	466	464	463	460	455
125°	669	679	676	672	671	598
135°	865	878	880	879	876	669
145°	1050	1058	1065	1066	1061	656
155°	1201	1204	1208	1213	1210	553
165°	1306	1305	1305	1313	1307	368
175°	1359	1356	1353	1362	1354	129
180°	1362	1362	1362	1362	1362	



TEST NUMBER: P920736

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US935-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1005.0	1005.0	1005.0	1005.0	1005.0
2.5°	1010.9	1006.1	995.4	1005.0	1003.2
5°	1005.0	1001.3	990.6	998.3	996.4
7.5°	998.3	992.6	981.9	989.7	987.7
10°	987.7	980.9	969.4	977.1	974.2
12.5°	973.2	967.4	955.9	960.6	958.7
15°	956.7	951.1	938.4	942.3	937.5
17.5°	936.4	930.7	918.1	922.9	918.1
20°	914.2	908.4	894.9	897.8	894.0
22.5°	892.1	883.4	870.7	870.7	868.7
25°	865.9	858.2	841.8	843.7	841.8
27.5°	836.9	830.1	817.6	814.8	809.9
30°	808.0	800.2	785.7	782.8	778.9
32.5°	777.1	771.3	755.8	749.9	746.1
35°	747.1	737.4	721.9	716.1	711.3
37.5°	713.3	704.6	689.1	682.3	677.4
40°	678.5	670.7	655.2	646.6	642.7
42.5°	644.6	636.9	621.5	611.7	606.0
45°	608.0	601.1	586.6	576.0	572.1
47.5°	572.1	565.4	549.9	539.2	533.5
50°	534.4	529.6	516.1	502.6	497.7
52.5°	497.7	490.9	478.5	467.8	461.0
55°	460.1	454.3	442.6	431.1	426.3
57.5°	422.3	417.5	404.9	393.3	389.4
60°	384.6	380.8	367.3	356.6	353.8
62.5°	347.9	341.1	331.5	321.8	318.0
65°	310.3	304.4	294.8	286.1	281.3
67.5°	271.6	266.7	258.0	251.3	247.5
70°	235.8	232.0	223.3	216.5	212.7
72.5°	199.1	195.2	190.4	183.7	180.8
75°	162.3	160.5	155.6	149.8	151.8
77.5°	129.5	125.6	123.6	120.8	118.0
80°	96.7	95.7	93.7	90.8	88.9
82.5°	65.7	65.7	64.8	60.9	60.9
85°	39.6	38.7	37.7	34.8	33.8
87.5°	17.4	15.5	13.5	10.7	9.6
90°	1.2	14.8	40.2	37.8	39.0
92.5°	25.5	34.4	35.7	36.9	36.9
95°	59.9	71.5	73.4	73.4	71.5
97.5°	99.7	110.4	114.9	114.9	114.9
100°	145.7	155.2	158.4	158.4	157.2
102.5°	194.2	201.1	205.6	206.9	205.6
105°	247.1	250.4	252.9	254.9	254.9
107.5°	299.6	304.5	304.5	305.4	299.6
110°	350.5	357.1	357.1	357.1	353.8



TEST NUMBER: P920736

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US935-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	405.5	412.5	411.3	408.0	405.5
115°	459.7	466.3	464.3	463.0	459.7
117.5°	513.5	522.5	516.8	513.5	510.2
120°	567.7	576.7	567.7	567.7	564.0
122.5°	616.9	628.4	622.7	619.4	616.9
125°	668.7	678.9	675.6	671.9	670.7
127.5°	719.1	731.8	727.4	722.4	719.1
130°	766.4	781.1	779.0	776.6	772.1
132.5°	819.3	830.8	831.6	825.9	822.6
135°	864.9	877.5	880.0	878.8	875.5
137.5°	915.8	926.0	928.1	927.2	922.3
140°	960.4	970.8	976.5	976.5	972.0
142.5°	1006.4	1016.8	1020.0	1021.2	1016.8
145°	1050.0	1058.2	1064.7	1066.0	1061.4
147.5°	1089.0	1099.2	1104.1	1106.2	1101.6
150°	1129.2	1136.2	1140.6	1144.4	1140.6
152.5°	1164.9	1171.9	1177.6	1182.2	1177.6
155°	1200.6	1203.8	1207.5	1213.3	1209.6
157.5°	1231.4	1233.8	1235.9	1244.1	1238.4
160°	1258.9	1261.4	1262.6	1269.5	1264.6
162.5°	1284.4	1284.4	1285.6	1293.4	1287.6
165°	1306.1	1304.8	1304.8	1313.1	1307.3
167.5°	1325.8	1322.1	1322.1	1330.3	1324.6
170°	1340.6	1337.3	1336.1	1344.3	1337.3
172.5°	1350.8	1347.5	1346.3	1354.5	1347.5
175°	1359.1	1355.7	1353.3	1361.5	1354.5
177.5°	1363.6	1360.3	1357.8	1364.8	1357.8
180°	1361.5	1361.5	1361.5	1361.5	1361.5



TEST NUMBER: P920736
 CATALOG NUMBER: DFN2DIP-TR3F0-030D050US935-FLLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.02	7.80	8.06	8.85	10.25	6.59	7.37	7.63	8.42	9.82
	3H	8.67	9.37	9.71	10.42	11.84	8.20	8.90	9.25	9.95	11.37
	4H	9.25	9.91	10.30	10.96	12.39	8.78	9.44	9.84	10.49	11.93
	6H	9.63	10.24	10.70	11.30	12.74	9.17	9.78	10.23	10.83	12.28
	8H	9.73	10.31	10.80	11.39	12.82	9.26	9.85	10.34	10.92	12.36
	12H	9.77	10.33	10.85	11.39	12.86	9.30	9.85	10.38	10.92	12.38
4H	2H	7.47	8.13	8.54	9.19	10.62	7.13	7.79	8.19	8.85	10.28
	3H	9.32	9.87	10.39	10.95	12.40	8.93	9.48	10.00	10.56	12.01
	4H	10.02	10.53	11.10	11.60	13.07	9.62	10.13	10.70	11.20	12.67
	6H	10.52	10.96	11.61	12.06	13.51	10.12	10.56	11.21	11.65	13.11
	8H	10.67	11.07	11.75	12.16	13.64	10.26	10.67	11.35	11.76	13.23
	12H	10.73	11.10	11.84	12.20	13.68	10.32	10.69	11.42	11.79	13.27
8H	4H	10.21	10.62	11.30	11.70	13.18	9.85	10.26	10.94	11.35	12.82
	6H	10.83	11.16	11.94	12.29	13.76	10.47	10.80	11.58	11.93	13.40
	8H	11.04	11.33	12.16	12.45	13.94	10.68	10.97	11.79	12.08	13.57
	12H	11.16	11.42	12.28	12.53	14.06	10.78	11.04	11.90	12.15	13.68
12H	4H	10.19	10.56	11.29	11.66	13.14	9.84	10.21	10.95	11.31	12.79
	6H	10.85	11.15	11.97	12.26	13.75	10.51	10.80	11.62	11.91	13.40
	8H	11.08	11.34	12.20	12.45	13.98	10.73	10.99	11.85	12.10	13.63