

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920743

Luminaire Tested: DFN2DIP-TR3F0-030D060US935-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920743
REPORT IS A COMBINATION OF REPORTS P901834 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-030D060US935-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7309.8 lumens
Efficiency: N/A
Efficacy: 105.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 69.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920743

CATALOG NUMBER: DFN2DIP-TR3F0-030D060US935-RLLONL

Luminous Intensity Polar Plot

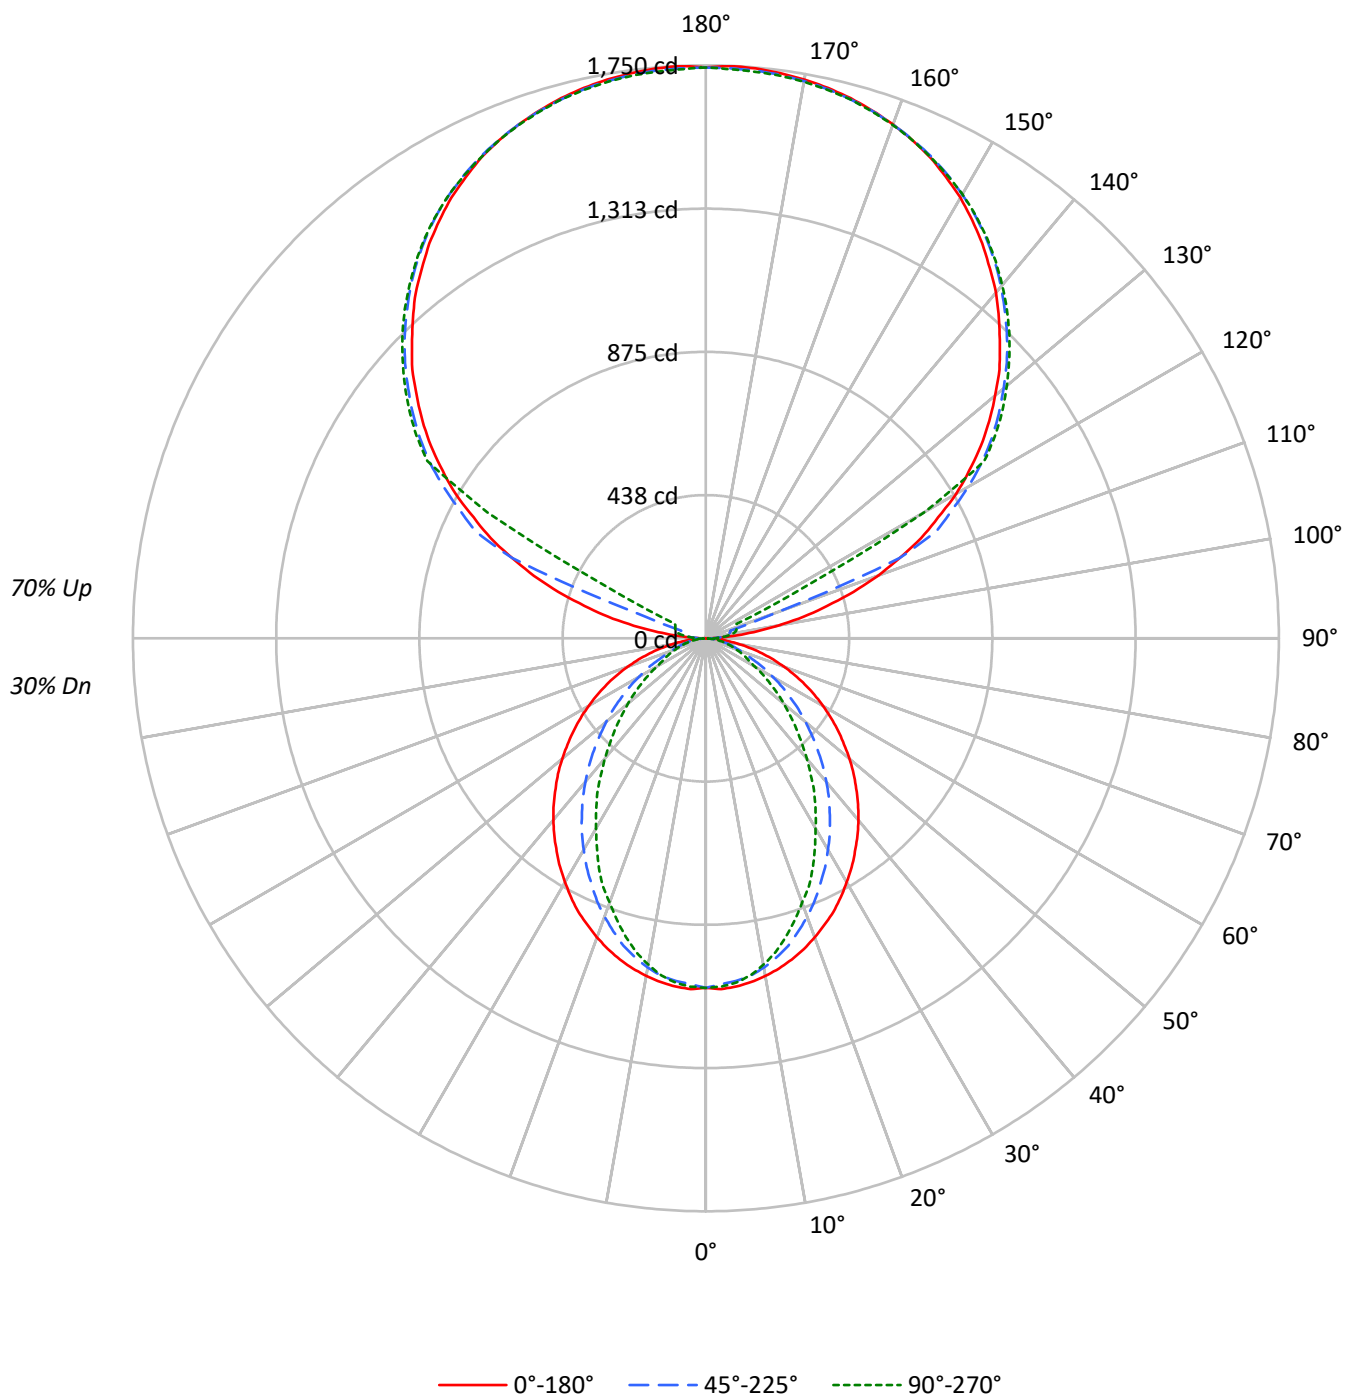

TEST NUMBER: P920743

CATALOG NUMBER: DFN2DIP-TR3F0-030D060US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	90	86	83	84	81	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	34	29	32	28	24	25	22	19	18	16	15
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	37	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	20	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1330	1330	1330
5°	1332	1308	1317
10°	1318	1281	1273
15°	1299	1238	1206
20°	1274	1178	1124
25°	1249	1112	1045
30°	1215	1044	945
35°	1182	971	857
40°	1148	896	756
45°	1109	812	665
50°	1069	728	576
55°	1026	638	491
60°	977	544	403
65°	920	449	362
70°	852	360	326
75°	765	315	295
80°	641	261	253
85°	436	169	185

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1159 cd/sqm

TEST NUMBER: P920743

CATALOG NUMBER: DFN2DIP-TR3F0-030D060US935-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.1	1.4
10°-20°	274.7	3.8
20°-30°	385.6	5.3
30°-40°	420.3	5.8
40°-50°	386.3	5.3
50°-60°	303.4	4.2
60°-70°	197.5	2.7
70°-80°	101.7	1.4
80°-90°	29.0	0.4
90°-100°	57.5	0.8
100°-110°	214.3	2.9
110°-120°	568.4	7.8
120°-130°	942.7	12.9
130°-140°	1001.4	13.7
140°-150°	930.7	12.7
150°-160°	748.2	10.2
160°-170°	482.1	6.6
170°-180°	165.9	2.3
0°-30°	760.3	10.4
0°-40°	1180.7	16.2
0°-60°	1870.4	25.6
0°-90°	2198.6	30.1
90°-120°	840.2	11.5
90°-150°	3714.9	50.8
90°-180°	5111.0	69.9
0°-180°	7309.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1068	1068	1068	1068	1068	
5°	1068	1063	1050	1059	1056	101
15°	1015	1005	972	954	944	286
25°	922	891	827	787	773	424
35°	794	745	660	599	578	497
45°	649	584	483	414	391	501
55°	494	418	314	256	238	441
65°	333	255	168	135	132	330
75°	178	110	77	70	70	188
85°	42	21	18	18	18	48
90°	1	15	25	32	34	7
95°	82	40	49	56	54	97
105°	384	421	77	91	96	410
115°	725	747	778	194	104	714
125°	1026	1042	1066	1075	1079	915
135°	1269	1289	1301	1313	1311	980
145°	1472	1471	1492	1501	1495	921
155°	1621	1610	1625	1632	1622	747
165°	1708	1701	1704	1713	1704	483
175°	1747	1738	1741	1750	1737	166
180°	1743	1743	1743	1743	1743	

TEST NUMBER: P920743

CATALOG NUMBER: DFN2DIP-TR3F0-030D060US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1067.6	1067.6	1067.6	1067.6	1067.6
2.5°	1072.4	1067.6	1056.9	1066.6	1064.7
5°	1067.6	1062.7	1050.2	1058.9	1055.9
7.5°	1058.9	1053.1	1039.6	1043.4	1038.5
10°	1047.2	1040.5	1021.2	1018.2	1012.5
12.5°	1032.8	1024.1	998.0	992.2	981.5
15°	1015.4	1004.7	971.9	953.6	943.9
17.5°	995.1	979.6	939.0	917.8	902.3
20°	971.9	952.5	904.2	880.2	858.8
22.5°	946.8	924.5	868.5	835.7	821.2
25°	921.7	890.7	827.0	787.4	772.8
27.5°	891.7	858.8	788.3	743.0	720.7
30°	859.9	823.1	745.8	696.6	670.5
32.5°	828.9	784.5	705.3	647.3	623.1
35°	794.2	744.8	659.9	599.0	577.7
37.5°	760.3	707.1	617.3	550.6	526.6
40°	724.6	666.7	572.9	504.3	479.2
42.5°	687.9	626.1	528.5	456.9	432.8
45°	649.3	584.4	483.1	414.4	391.2
47.5°	612.5	544.0	439.6	370.9	349.7
50°	572.0	503.3	397.1	330.4	310.1
52.5°	532.3	459.9	356.5	292.7	274.4
55°	493.6	418.3	313.9	256.1	237.7
57.5°	454.1	376.8	276.4	222.2	206.7
60°	413.5	336.2	236.7	187.4	172.0
62.5°	373.9	296.6	202.9	156.5	148.9
65°	333.3	255.0	168.1	135.3	132.3
67.5°	294.7	216.4	135.3	118.8	115.9
70°	254.1	178.7	112.0	102.4	98.5
72.5°	215.4	143.9	93.7	86.0	84.0
75°	177.7	110.1	77.3	70.5	69.6
77.5°	140.1	78.2	60.9	57.0	55.0
80°	105.3	56.1	46.3	42.5	42.5
82.5°	73.4	37.7	31.9	30.0	30.0
85°	41.5	21.2	18.3	18.3	18.3
87.5°	15.5	7.7	7.7	6.8	6.8
90°	1.2	15.2	25.1	31.6	34.0
92.5°	31.6	26.5	30.2	32.8	34.0
95°	82.0	40.3	49.2	55.6	54.2
97.5°	147.6	44.2	64.2	68.2	69.4
100°	223.3	50.5	71.9	82.0	84.5
102.5°	306.5	304.1	74.5	88.3	92.1
105°	383.5	421.4	77.0	90.7	95.9
107.5°	473.1	504.5	79.6	93.3	98.4
110°	559.0	585.3	220.8	94.7	99.6

TEST NUMBER: P920743

CATALOG NUMBER: DFN2DIP-TR3F0-030D060US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	639.6	662.3	640.8	97.0	101.0
115°	725.4	746.8	778.4	194.3	103.5
117.5°	799.8	825.0	846.5	666.1	335.5
120°	883.1	902.0	924.8	939.9	769.6
122.5°	953.6	973.9	999.2	1006.7	1008.1
125°	1025.6	1042.1	1066.0	1074.9	1078.6
127.5°	1091.2	1108.9	1127.9	1140.5	1141.7
130°	1153.0	1173.3	1187.1	1201.0	1199.8
132.5°	1216.2	1232.6	1246.4	1257.7	1256.5
135°	1269.2	1289.4	1300.6	1313.4	1310.8
137.5°	1324.6	1339.7	1352.5	1365.0	1361.3
140°	1378.8	1389.0	1402.8	1414.2	1407.9
142.5°	1424.3	1433.2	1449.6	1459.6	1453.3
145°	1472.3	1470.9	1492.4	1501.2	1495.0
147.5°	1513.8	1510.0	1531.5	1537.7	1532.8
150°	1554.3	1545.4	1565.6	1573.1	1566.8
152.5°	1588.3	1578.2	1597.1	1604.7	1595.9
155°	1621.1	1609.8	1625.0	1632.5	1622.4
157.5°	1647.6	1637.5	1648.9	1657.8	1647.6
160°	1670.3	1662.7	1670.3	1677.8	1669.0
162.5°	1690.4	1682.9	1689.2	1698.1	1686.7
165°	1708.1	1700.6	1704.3	1713.2	1704.3
167.5°	1722.0	1714.4	1718.3	1727.2	1715.7
170°	1733.4	1725.8	1728.4	1737.1	1725.8
172.5°	1740.9	1733.4	1735.9	1744.8	1733.4
175°	1747.2	1738.4	1740.9	1749.7	1737.1
177.5°	1749.7	1740.9	1742.2	1751.1	1739.7
180°	1743.4	1743.4	1743.4	1743.4	1743.4

TEST NUMBER: P920743

CATALOG NUMBER: DFN2DIP-TR3F0-030D060US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.87	6.56	6.98	7.66	9.20	1.84	2.53	2.96	3.64	5.17
	3H	7.52	8.14	8.65	9.26	10.80	3.01	3.63	4.14	4.75	6.29
	4H	8.12	8.70	9.25	9.82	11.37	3.45	4.04	4.59	5.16	6.71
	6H	8.53	9.06	9.67	10.18	11.75	3.76	4.30	4.90	5.42	6.98
	8H	8.64	9.16	9.79	10.29	11.85	3.85	4.36	4.99	5.49	7.05
	12H	8.70	9.18	9.85	10.31	11.89	3.88	4.37	5.03	5.50	7.08
4H	2H	5.87	6.45	7.01	7.57	9.12	2.41	3.00	3.56	4.12	5.67
	3H	7.67	8.16	8.82	9.30	10.87	3.75	4.23	4.89	5.38	6.94
	4H	8.35	8.80	9.50	9.93	11.52	4.28	4.73	5.43	5.86	7.45
	6H	8.85	9.23	10.00	10.39	11.96	4.69	5.07	5.84	6.23	7.80
	8H	9.02	9.37	10.17	10.52	12.11	4.81	5.17	5.97	6.31	7.91
	12H	9.10	9.42	10.27	10.58	12.18	4.87	5.19	6.04	6.35	7.95
8H	4H	8.31	8.66	9.46	9.81	11.40	4.55	4.90	5.70	6.05	7.64
	6H	8.86	9.15	10.03	10.34	11.93	5.05	5.35	6.23	6.53	8.12
	8H	9.07	9.32	10.25	10.49	12.10	5.24	5.50	6.42	6.66	8.27
	12H	9.19	9.42	10.38	10.58	12.23	5.35	5.57	6.53	6.74	8.38
12H	4H	8.25	8.58	9.42	9.73	11.33	4.54	4.87	5.71	6.03	7.62
	6H	8.83	9.09	10.01	10.26	11.87	5.10	5.36	6.28	6.52	8.13
	8H	9.04	9.27	10.22	10.43	12.07	5.30	5.52	6.48	6.69	8.33

END OF REPORT