

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920775

Luminaire Tested: DFN2DIP-TR3F0-040D080US935-FLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920775
REPORT IS A COMBINATION OF REPORTS P901863 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-040D080US935-FLLONL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10228.6 lumens
Efficiency: N/A
Efficacy: 106.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 96.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920775
CATALOG NUMBER: DFN2DIP-TR3F0-040D080US935-FLLONL

Luminous Intensity Polar Plot

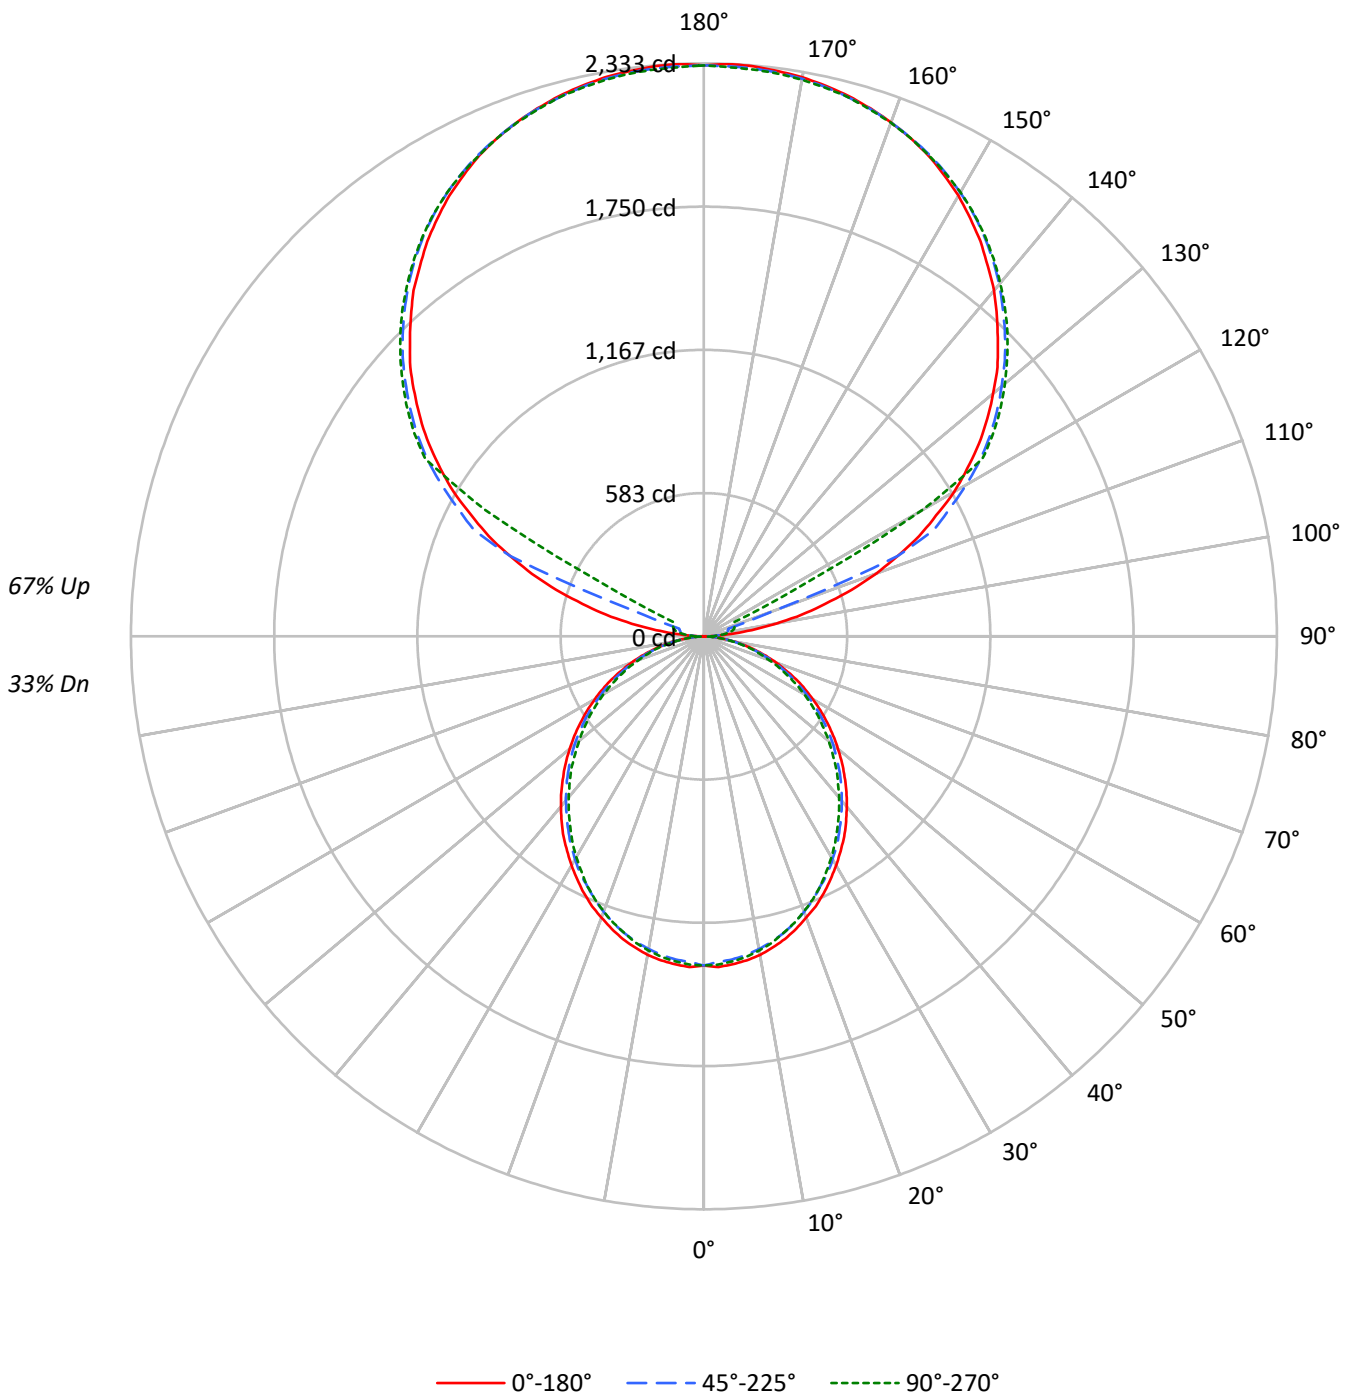



TEST NUMBER: P920775
 CATALOG NUMBER: DFN2DIP-TR3F0-040D080US935-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33				33
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34	28				28
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29	24				24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25	20				20
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21	17				17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18	15				15
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16	13				13
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14	12				12
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10				10
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12	9				9
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11	9				9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1670	1670	1670
5°	1672	1645	1657
10°	1657	1622	1633
15°	1632	1594	1597
20°	1598	1555	1560
25°	1564	1509	1517
30°	1522	1467	1464
35°	1482	1416	1407
40°	1434	1366	1353
45°	1384	1315	1297
50°	1331	1261	1233
55°	1275	1200	1173
60°	1212	1126	1106
65°	1142	1050	1026
70°	1054	957	939
75°	932	846	857
80°	784	704	705
85°	554	464	455

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1547 cd/sqm



TEST NUMBER: P920775

CATALOG NUMBER: DFN2DIP-TR3F0-040D080US935-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.1	1.2
10°-20°	354.9	3.5
20°-30°	521.5	5.1
30°-40°	605.7	5.9
40°-50°	605.0	5.9
50°-60°	527.5	5.2
60°-70°	389.9	3.8
70°-80°	220.6	2.2
80°-90°	62.3	0.6
90°-100°	76.7	0.7
100°-110°	285.7	2.8
110°-120°	757.9	7.4
120°-130°	1256.9	12.3
130°-140°	1335.2	13.1
140°-150°	1240.9	12.1
150°-160°	997.6	9.8
160°-170°	642.8	6.3
170°-180°	221.3	2.2
0°-30°	1002.5	9.8
0°-40°	1608.3	15.7
0°-60°	2740.7	26.8
0°-90°	3413.6	33.4
90°-120°	1120.2	11.0
90°-150°	4953.3	48.4
90°-180°	6815.0	66.6
0°-180°	10228.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1340	1340	1340	1340	1340	
5°	1340	1335	1321	1331	1329	127
15°	1276	1268	1251	1256	1250	359
25°	1154	1144	1122	1125	1122	531
35°	996	983	963	955	948	622
45°	810	802	782	768	763	626
55°	614	606	590	575	568	548
65°	414	406	393	381	375	409
75°	216	214	207	200	202	231
85°	53	52	50	46	45	59
90°	2	20	34	42	45	9
95°	109	54	66	74	72	129
105°	511	562	103	121	128	546
115°	967	996	1038	259	138	952
125°	1367	1389	1421	1433	1438	1220
135°	1692	1719	1734	1751	1748	1307
145°	1963	1961	1990	2002	1993	1228
155°	2161	2146	2167	2177	2163	996
165°	2278	2268	2272	2284	2272	643
175°	2330	2318	2321	2333	2316	222
180°	2325	2325	2325	2325	2325	



TEST NUMBER: P920775

CATALOG NUMBER: DFN2DIP-TR3F0-040D080US935-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1340.1	1340.1	1340.1	1340.1	1340.1
2.5°	1347.9	1341.4	1327.2	1340.1	1337.6
5°	1340.1	1335.0	1320.8	1331.0	1328.6
7.5°	1331.0	1323.4	1309.1	1319.6	1317.0
10°	1317.0	1307.9	1292.5	1302.8	1298.9
12.5°	1297.5	1289.9	1274.4	1280.9	1278.2
15°	1275.7	1268.0	1251.2	1256.4	1250.0
17.5°	1248.6	1241.0	1224.2	1230.5	1224.2
20°	1218.9	1211.3	1193.3	1197.0	1192.1
22.5°	1189.4	1177.8	1161.0	1161.0	1158.4
25°	1154.5	1144.3	1122.4	1124.9	1122.4
27.5°	1115.9	1106.8	1090.2	1086.3	1079.9
30°	1077.3	1066.9	1047.7	1043.8	1038.6
32.5°	1036.0	1028.4	1007.7	1000.0	994.7
35°	996.1	983.3	962.6	954.8	948.4
37.5°	951.0	939.3	918.7	909.7	903.3
40°	904.7	894.2	873.6	862.1	857.0
42.5°	859.5	849.1	828.6	815.6	808.0
45°	810.5	801.6	782.1	768.1	762.8
47.5°	762.8	753.8	733.2	719.0	711.4
50°	712.6	706.1	688.1	670.0	663.6
52.5°	663.6	654.6	637.9	623.7	614.7
55°	613.5	605.6	590.2	574.7	568.3
57.5°	563.1	556.7	539.8	524.4	519.3
60°	512.8	507.7	489.7	475.5	471.7
62.5°	463.9	454.9	442.0	429.1	424.0
65°	413.7	405.9	393.0	381.4	375.1
67.5°	362.1	355.6	344.1	335.1	329.9
70°	314.4	309.3	297.6	288.6	283.5
72.5°	265.5	260.3	253.9	244.9	241.0
75°	216.5	214.0	207.4	199.8	202.3
77.5°	172.6	167.5	164.9	161.0	157.2
80°	128.9	127.5	124.9	121.1	118.6
82.5°	87.6	87.6	86.4	81.2	81.2
85°	52.8	51.6	50.3	46.3	45.1
87.5°	23.2	20.7	18.1	14.2	12.8
90°	1.6	20.1	33.6	42.1	45.4
92.5°	42.1	35.4	40.4	43.7	45.4
95°	109.3	53.7	65.5	74.1	72.3
97.5°	196.7	58.9	85.7	90.9	92.5
100°	297.8	67.3	95.9	109.3	112.6
102.5°	408.7	405.4	99.3	117.6	122.9
105°	511.3	561.9	102.6	121.1	127.9
107.5°	630.8	672.7	106.1	124.4	131.2
110°	745.3	780.4	294.5	126.2	132.9



TEST NUMBER: P920775

CATALOG NUMBER: DFN2DIP-TR3F0-040D080US935-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	852.9	883.0	854.5	129.4	134.7
115°	967.2	995.7	1037.8	259.1	138.0
117.5°	1066.4	1100.0	1128.8	888.0	447.5
120°	1177.5	1202.6	1233.0	1253.2	1026.1
122.5°	1271.5	1298.6	1332.3	1342.3	1344.1
125°	1367.4	1389.4	1421.3	1433.1	1438.1
127.5°	1454.9	1478.5	1503.9	1520.6	1522.2
130°	1537.4	1564.3	1582.8	1601.4	1599.7
132.5°	1621.5	1643.5	1661.9	1677.1	1675.4
135°	1692.2	1719.2	1734.1	1751.2	1747.7
137.5°	1766.2	1786.3	1803.3	1820.1	1815.1
140°	1838.4	1852.0	1870.4	1885.6	1877.1
142.5°	1899.2	1910.9	1932.7	1946.1	1937.7
145°	1963.1	1961.3	1989.9	2001.6	1993.2
147.5°	2018.4	2013.4	2041.9	2050.4	2043.8
150°	2072.3	2060.5	2087.5	2097.5	2089.1
152.5°	2117.7	2104.3	2129.4	2139.7	2127.9
155°	2161.4	2146.5	2166.6	2176.6	2163.3
157.5°	2196.7	2183.4	2198.6	2210.4	2196.7
160°	2227.1	2217.0	2227.1	2237.1	2225.3
162.5°	2253.9	2243.9	2252.3	2264.1	2248.9
165°	2277.5	2267.5	2272.5	2284.2	2272.5
167.5°	2296.0	2285.9	2291.0	2302.8	2287.7
170°	2311.3	2301.0	2304.5	2316.3	2301.0
172.5°	2321.3	2311.3	2314.6	2326.4	2311.3
175°	2329.6	2317.8	2321.3	2333.0	2316.3
177.5°	2333.0	2321.3	2323.0	2334.8	2319.6
180°	2324.6	2324.6	2324.6	2324.6	2324.6



TEST NUMBER: P920775
 CATALOG NUMBER: DFN2DIP-TR3F0-040D080US935-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.23	7.96	8.32	9.04	10.54	6.80	7.53	7.89	8.62	10.11
	3H	8.87	9.52	9.97	10.62	12.13	8.40	9.05	9.50	10.15	11.66
	4H	9.45	10.07	10.55	11.16	12.68	8.98	9.60	10.08	10.69	12.21
	6H	9.83	10.40	10.95	11.50	13.03	9.36	9.93	10.48	11.03	12.56
	8H	9.93	10.47	11.05	11.59	13.10	9.46	10.00	10.58	11.12	12.64
	12H	9.97	10.48	11.09	11.59	13.13	9.49	10.01	10.62	11.12	12.66
4H	2H	7.67	8.29	8.79	9.39	10.90	7.33	7.95	8.44	9.04	10.56
	3H	9.51	10.03	10.63	11.15	12.68	9.12	9.64	10.25	10.76	12.29
	4H	10.22	10.69	11.34	11.80	13.35	9.81	10.29	10.94	11.40	12.95
	6H	10.71	11.12	11.85	12.26	13.80	10.31	10.72	11.44	11.85	13.39
	8H	10.86	11.24	11.99	12.36	13.92	10.45	10.83	11.58	11.96	13.51
	12H	10.92	11.26	12.07	12.40	13.96	10.50	10.85	11.65	11.99	13.55
8H	4H	10.40	10.78	11.53	11.91	13.46	10.04	10.42	11.17	11.55	13.10
	6H	11.01	11.33	12.16	12.50	14.05	10.65	10.97	11.81	12.14	13.69
	8H	11.22	11.50	12.38	12.65	14.22	10.86	11.14	12.02	12.28	13.86
	12H	11.34	11.59	12.51	12.73	14.34	10.97	11.21	12.13	12.35	13.96
12H	4H	10.38	10.72	11.52	11.86	13.42	10.03	10.37	11.17	11.51	13.07
	6H	11.04	11.31	12.20	12.46	14.03	10.69	10.97	11.85	12.11	13.69
	8H	11.27	11.51	12.43	12.65	14.26	10.91	11.16	12.08	12.30	13.91