

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923529

Luminaire Tested: DFN2DIP-TR3F0-050D080US940-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923529
REPORT IS A COMBINATION OF REPORTS P901865 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-050D080US940-FLLONL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11476.3 lumens
Efficiency: N/A
Efficacy: 107.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 106.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923529

CATALOG NUMBER: DFN2DIP-TR3F0-050D080US940-FLLONL

Luminous Intensity Polar Plot

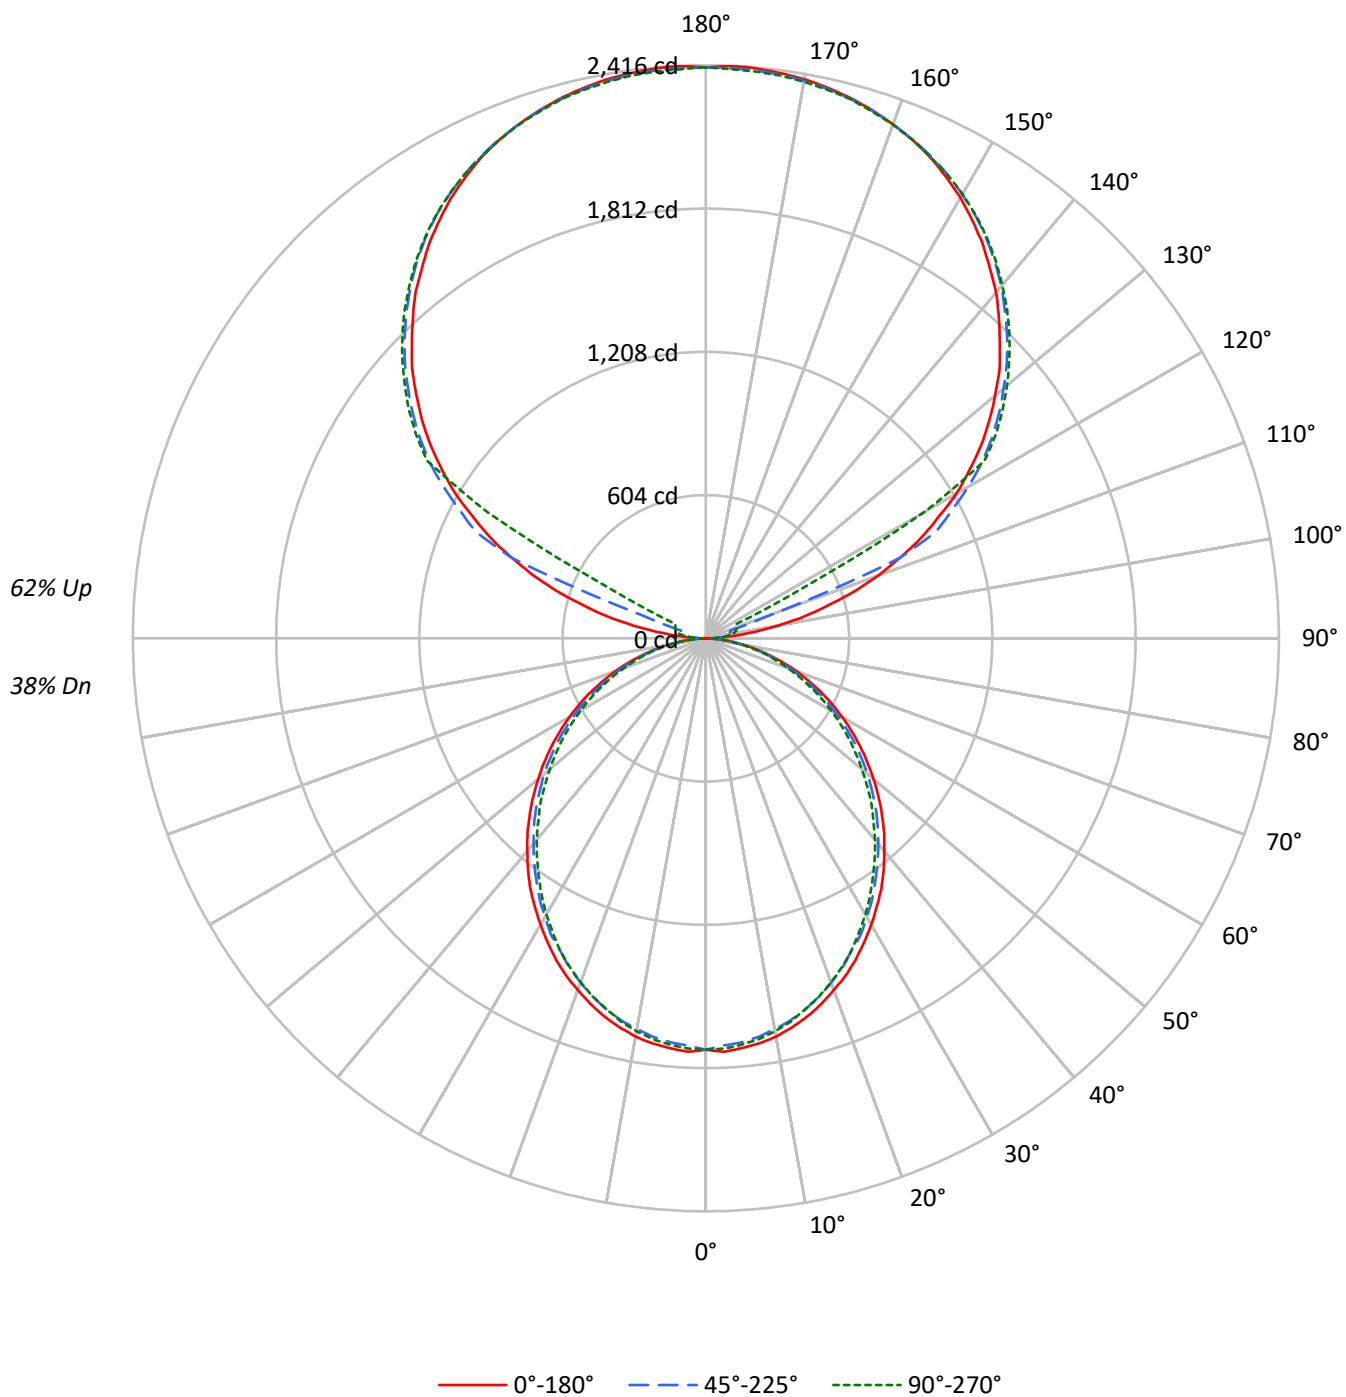

TEST NUMBER: P923529

CATALOG NUMBER: DFN2DIP-TR3F0-050D080US940-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	38
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32
3	79	70	63	57	71	64	57	52	52	48	44	41	38	36	31	29	28
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	20	18
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	16	14
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13
10	45	33	26	22	41	31	25	20	26	21	17	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2162	2162	2162
5°	2164	2130	2145
10°	2145	2099	2114
15°	2112	2063	2067
20°	2069	2013	2020
25°	2025	1954	1964
30°	1971	1899	1895
35°	1919	1834	1821
40°	1856	1768	1751
45°	1793	1702	1679
50°	1723	1633	1596
55°	1651	1553	1519
60°	1569	1458	1431
65°	1479	1360	1327
70°	1365	1240	1215
75°	1206	1095	1110
80°	1015	912	912
85°	717	600	589

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1793 cd/sqm

TEST NUMBER: P923529

CATALOG NUMBER: DFN2DIP-TR3F0-050D080US940-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	163.3	1.4
10°-20°	459.4	4.0
20°-30°	675.2	5.9
30°-40°	784.2	6.8
40°-50°	783.2	6.8
50°-60°	682.9	6.0
60°-70°	504.8	4.4
70°-80°	285.6	2.5
80°-90°	79.6	0.7
90°-100°	79.4	0.7
100°-110°	295.9	2.6
110°-120°	784.9	6.8
120°-130°	1301.8	11.3
130°-140°	1382.8	12.0
140°-150°	1285.1	11.2
150°-160°	1033.2	9.0
160°-170°	665.8	5.8
170°-180°	229.2	2.0
0°-30°	1297.9	11.3
0°-40°	2082.0	18.1
0°-60°	3548.1	30.9
0°-90°	4418.2	38.5
90°-120°	1160.2	10.1
90°-150°	5129.9	44.7
90°-180°	7058.0	61.5
0°-180°	11476.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1735	1735	1735	1735	1735	
5°	1735	1728	1710	1723	1720	165
15°	1651	1642	1620	1627	1618	465
25°	1495	1481	1453	1456	1453	688
35°	1290	1273	1246	1236	1228	805
45°	1049	1038	1012	994	988	810
55°	794	784	764	744	736	710
65°	536	526	509	494	485	530
75°	280	277	268	259	262	299
85°	68	67	65	60	58	76
90°	2	21	35	44	47	11
95°	113	56	68	77	75	134
105°	530	582	106	125	132	566
115°	1002	1031	1075	268	143	986
125°	1416	1439	1472	1484	1489	1263
135°	1753	1780	1796	1814	1810	1354
145°	2033	2031	2061	2073	2064	1272
155°	2238	2223	2244	2254	2240	1032
165°	2359	2348	2354	2366	2354	666
175°	2413	2400	2404	2416	2399	230
180°	2408	2408	2408	2408	2408	

TEST NUMBER: P923529

CATALOG NUMBER: DFN2DIP-TR3F0-050D080US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1734.8	1734.8	1734.8	1734.8	1734.8
2.5°	1744.9	1736.6	1718.2	1734.8	1731.7
5°	1734.8	1728.3	1709.9	1723.1	1720.0
7.5°	1723.1	1713.2	1694.9	1708.3	1705.0
10°	1705.0	1693.3	1673.3	1686.5	1681.6
12.5°	1679.8	1669.9	1649.9	1658.2	1654.8
15°	1651.4	1641.5	1619.8	1626.6	1618.2
17.5°	1616.4	1606.5	1584.7	1593.0	1584.7
20°	1578.1	1568.2	1544.8	1549.7	1543.2
22.5°	1539.8	1524.7	1503.0	1503.0	1499.6
25°	1494.7	1481.4	1453.0	1456.3	1453.0
27.5°	1444.6	1432.9	1411.3	1406.3	1398.0
30°	1394.6	1381.3	1356.3	1351.3	1344.6
32.5°	1341.2	1331.3	1304.6	1294.5	1287.8
35°	1289.5	1272.9	1246.2	1236.1	1227.8
37.5°	1231.1	1216.1	1189.4	1177.7	1169.4
40°	1171.2	1157.7	1131.0	1116.1	1109.4
42.5°	1112.8	1099.3	1072.7	1055.9	1046.0
45°	1049.4	1037.7	1012.5	994.3	987.6
47.5°	987.6	975.9	949.2	930.8	920.9
50°	922.5	914.2	890.8	867.5	859.1
52.5°	859.1	847.4	825.8	807.4	795.8
55°	794.2	784.1	764.0	744.0	735.8
57.5°	729.0	720.7	698.9	678.9	672.2
60°	663.9	657.4	634.0	615.5	610.6
62.5°	600.6	588.9	572.2	555.5	548.8
65°	535.6	525.5	508.8	493.8	485.4
67.5°	468.9	460.4	445.5	433.8	427.0
70°	407.1	400.4	385.3	373.6	367.1
72.5°	343.8	337.0	328.7	317.0	312.0
75°	280.2	277.0	268.5	258.6	262.0
77.5°	223.6	216.8	213.5	208.5	203.6
80°	166.9	165.1	161.8	156.9	153.5
82.5°	113.4	113.4	111.8	105.1	105.1
85°	68.3	66.7	65.1	60.0	58.4
87.5°	30.1	26.8	23.4	18.4	16.7
90°	1.7	20.9	34.8	43.6	47.0
92.5°	43.6	36.6	41.8	45.3	47.0
95°	113.2	55.6	67.9	76.8	74.9
97.5°	203.8	61.0	88.7	94.2	95.8
100°	308.4	69.7	99.3	113.2	116.6
102.5°	423.3	419.9	102.8	121.8	127.2
105°	529.6	581.9	106.3	125.4	132.4
107.5°	653.3	696.7	109.9	128.9	135.9
110°	771.9	808.2	305.0	130.7	137.6

TEST NUMBER: P923529

CATALOG NUMBER: DFN2DIP-TR3F0-050D080US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	883.3	914.5	885.0	134.0	139.5
115°	1001.7	1031.3	1074.9	268.3	142.9
117.5°	1104.5	1139.2	1169.0	919.7	463.4
120°	1219.5	1245.5	1277.0	1297.9	1062.7
122.5°	1316.9	1344.9	1379.8	1390.2	1392.0
125°	1416.2	1439.0	1472.0	1484.3	1489.4
127.5°	1506.8	1531.2	1557.6	1574.8	1576.5
130°	1592.2	1620.1	1639.2	1658.5	1656.8
132.5°	1679.4	1702.1	1721.2	1736.9	1735.2
135°	1752.6	1780.5	1796.0	1813.6	1810.1
137.5°	1829.2	1850.0	1867.6	1885.0	1879.8
140°	1904.0	1918.1	1937.2	1952.8	1944.1
142.5°	1966.9	1979.1	2001.6	2015.5	2006.8
145°	2033.1	2031.2	2060.8	2073.0	2064.3
147.5°	2090.4	2085.3	2114.8	2123.5	2116.7
150°	2146.3	2134.0	2162.0	2172.3	2163.6
152.5°	2193.3	2179.3	2205.4	2216.0	2203.8
155°	2238.5	2223.0	2243.9	2254.2	2240.4
157.5°	2275.1	2261.3	2277.0	2289.2	2275.1
160°	2306.6	2296.1	2306.6	2316.9	2304.7
162.5°	2334.3	2324.0	2332.6	2344.8	2329.1
165°	2358.8	2348.4	2353.6	2365.7	2353.6
167.5°	2377.9	2367.4	2372.8	2385.0	2369.3
170°	2393.7	2383.1	2386.7	2398.9	2383.1
172.5°	2404.1	2393.7	2397.2	2409.4	2393.7
175°	2412.7	2400.5	2404.1	2416.2	2398.9
177.5°	2416.2	2404.1	2405.8	2418.1	2402.4
180°	2407.5	2407.5	2407.5	2407.5	2407.5

TEST NUMBER: P923529

CATALOG NUMBER: DFN2DIP-TR3F0-050D080US940-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.73	9.50	9.78	10.55	11.98	8.30	9.07	9.35	10.12	11.55
	3H	10.38	11.06	11.44	12.13	13.57	9.91	10.59	10.97	11.66	13.10
	4H	10.95	11.60	12.02	12.67	14.12	10.48	11.14	11.56	12.20	13.65
	6H	11.34	11.94	12.42	13.01	14.47	10.87	11.47	11.95	12.54	14.00
	8H	11.44	12.01	12.52	13.09	14.55	10.97	11.54	12.06	12.63	14.08
	12H	11.48	12.02	12.57	13.10	14.58	11.01	11.55	12.10	12.63	14.11
4H	2H	9.18	9.83	10.26	10.90	12.35	8.84	9.49	9.91	10.55	12.00
	3H	11.03	11.57	12.11	12.66	14.13	10.64	11.18	11.72	12.27	13.74
	4H	11.73	12.23	12.82	13.31	14.80	11.33	11.83	12.42	12.91	14.39
	6H	12.23	12.66	13.33	13.76	15.24	11.83	12.25	12.92	13.36	14.84
	8H	12.37	12.77	13.47	13.87	15.37	11.97	12.37	13.06	13.46	14.96
	12H	12.44	12.80	13.55	13.91	15.41	12.02	12.38	13.14	13.49	14.99
8H	4H	11.91	12.31	13.01	13.41	14.91	11.56	11.96	12.65	13.05	14.55
	6H	12.53	12.86	13.65	14.00	15.49	12.17	12.50	13.29	13.64	15.13
	8H	12.74	13.03	13.87	14.15	15.67	12.38	12.67	13.51	13.79	15.30
	12H	12.86	13.12	13.99	14.24	15.79	12.49	12.74	13.62	13.86	15.41
12H	4H	11.89	12.26	13.01	13.37	14.87	11.54	11.91	12.66	13.02	14.52
	6H	12.56	12.85	13.68	13.97	15.48	12.21	12.50	13.34	13.62	15.13
	8H	12.79	13.04	13.92	14.16	15.71	12.43	12.69	13.57	13.81	15.36

END OF REPORT