

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923563

Luminaire Tested: DFN2DIP-TR3F0-070D030US940-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923563
REPORT IS A COMBINATION OF REPORTS P901800 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-070D030US940-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7954.0 lumens
Efficiency: N/A
Efficacy: 85.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 92.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923563

CATALOG NUMBER: DFN2DIP-TR3F0-070D030US940-RLLONL

Luminous Intensity Polar Plot

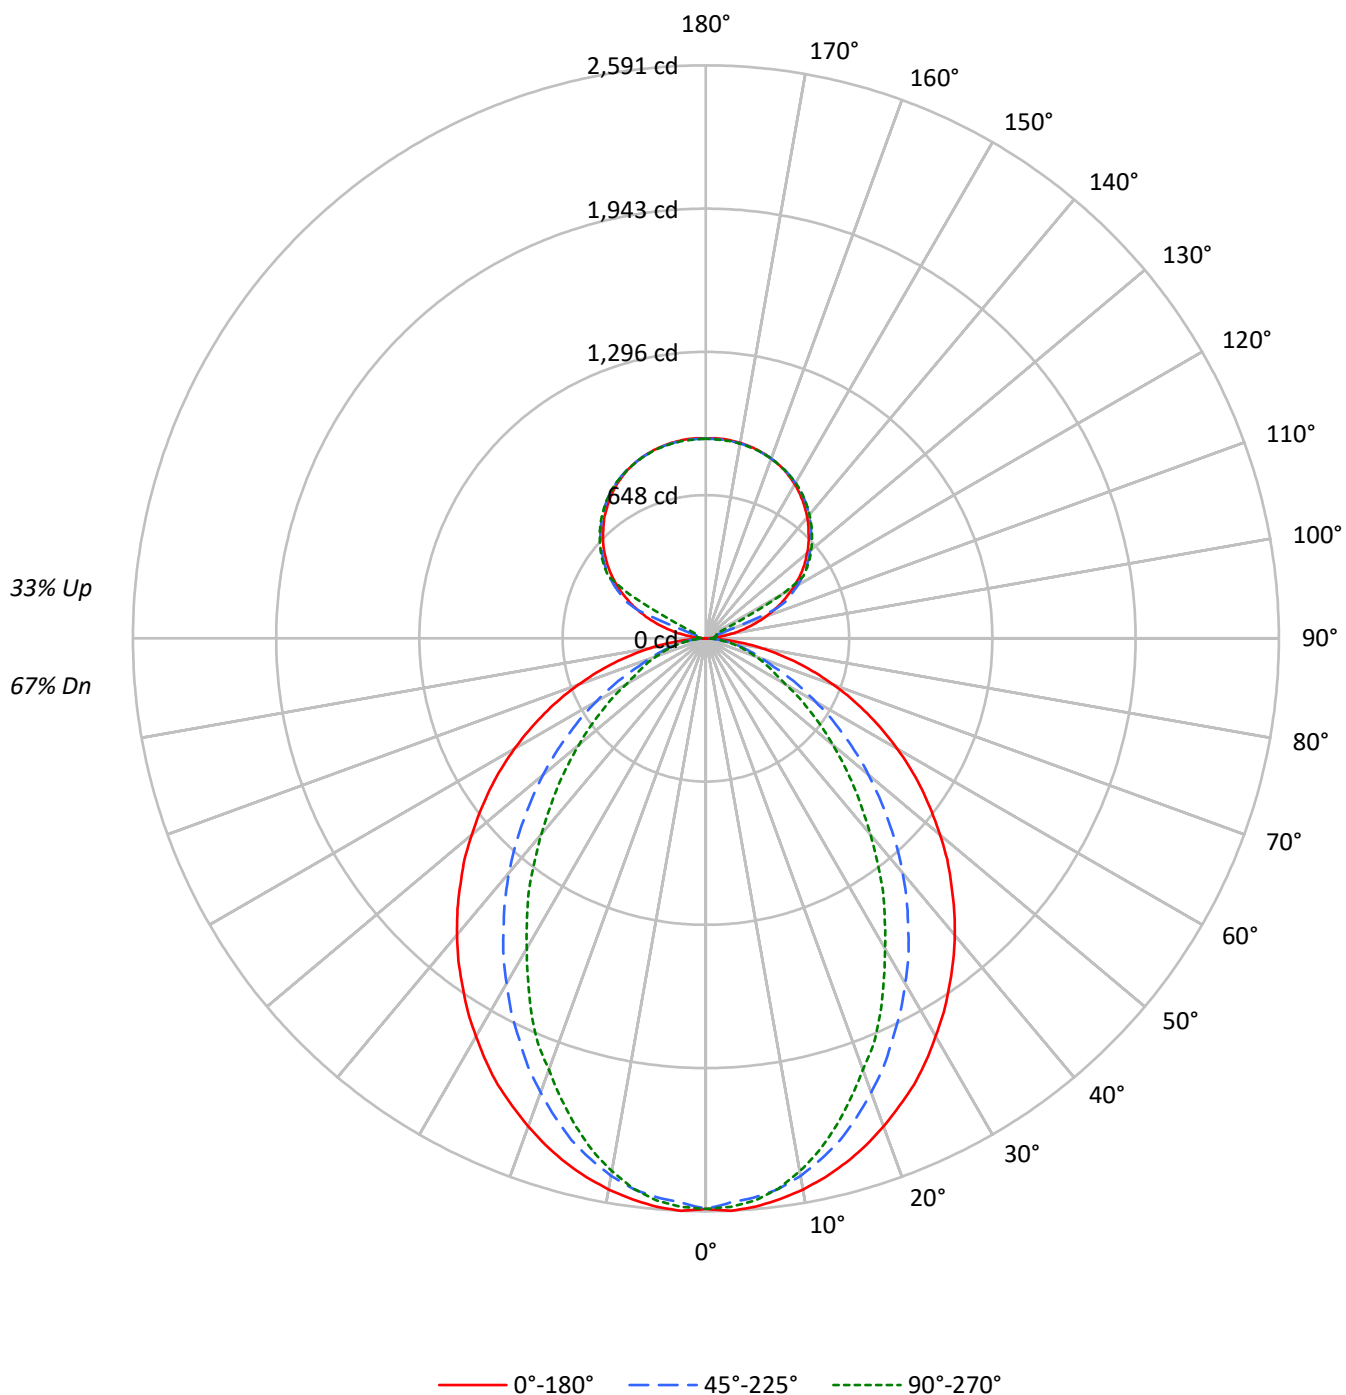

TEST NUMBER: P923563

CATALOG NUMBER: DFN2DIP-TR3F0-070D030US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71
1	102	98	94	91	96	93	89	86	82	80	78	73	71	69	64	63	62
2	94	86	80	75	88	82	76	72	73	69	65	65	62	59	57	55	53
3	86	77	69	64	81	72	66	61	65	60	56	58	54	51	51	48	46
4	79	68	60	54	74	65	58	52	58	53	48	52	48	44	46	43	40
5	73	61	53	47	68	58	51	45	52	47	42	47	42	39	42	38	35
6	67	55	47	41	63	53	45	40	48	42	37	43	38	34	38	35	31
7	62	50	42	37	59	48	41	36	43	37	33	39	34	31	35	31	28
8	58	46	38	33	55	44	37	32	40	34	30	36	31	28	33	29	26
9	54	42	35	30	51	40	33	29	37	31	27	33	29	25	30	26	23
10	51	39	32	27	48	37	31	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3215	3215	3215
5°	3218	3161	3182
10°	3185	3096	3076
15°	3139	2991	2914
20°	3079	2848	2716
25°	3018	2687	2525
30°	2936	2523	2283
35°	2856	2347	2071
40°	2775	2164	1828
45°	2680	1963	1607
50°	2582	1759	1392
55°	2479	1542	1186
60°	2361	1315	974
65°	2224	1086	874
70°	2058	871	788
75°	1849	762	713
80°	1548	631	611
85°	1053	408	447

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2680 cd/sqm

TEST NUMBER: P923563

CATALOG NUMBER: DFN2DIP-TR3F0-070D030US940-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	241.8	3.0
10°-20°	663.7	8.3
20°-30°	931.9	11.7
30°-40°	1015.8	12.8
40°-50°	933.6	11.7
50°-60°	733.2	9.2
60°-70°	477.3	6.0
70°-80°	245.7	3.1
80°-90°	64.3	0.8
90°-100°	29.8	0.4
100°-110°	111.0	1.4
110°-120°	294.3	3.7
120°-130°	488.2	6.1
130°-140°	518.5	6.5
140°-150°	481.9	6.1
150°-160°	387.5	4.9
160°-170°	249.7	3.1
170°-180°	85.9	1.1
0°-30°	1837.4	23.1
0°-40°	2853.2	35.9
0°-60°	4520.0	56.8
0°-90°	5307.2	66.7
90°-120°	435.1	5.5
90°-150°	1923.7	24.2
90°-180°	2647.0	33.3
0°-180°	7954.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2580	2580	2580	2580	2580	
5°	2580	2568	2538	2559	2552	245
15°	2454	2428	2349	2304	2281	691
25°	2227	2152	1998	1903	1868	1024
35°	1919	1800	1595	1448	1396	1201
45°	1569	1412	1167	1002	946	1212
55°	1193	1011	759	619	574	1066
65°	806	616	406	327	320	799
75°	430	266	187	170	168	454
85°	100	51	44	44	44	115
90°	1	8	13	16	18	8
95°	42	21	25	29	28	50
105°	199	218	40	47	50	212
115°	376	387	403	101	54	370
125°	531	540	552	557	559	474
135°	657	668	674	680	679	508
145°	762	762	773	777	774	477
155°	840	834	841	845	840	387
165°	884	881	883	887	883	250
175°	905	900	902	906	900	86
180°	903	903	903	903	903	

TEST NUMBER: P923563

CATALOG NUMBER: DFN2DIP-TR3F0-070D030US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2579.8	2579.8	2579.8	2579.8	2579.8
2.5°	2591.4	2579.8	2554.0	2577.6	2572.9
5°	2579.8	2568.1	2537.7	2558.8	2551.8
7.5°	2558.8	2544.9	2512.2	2521.3	2509.7
10°	2530.8	2514.4	2467.8	2460.7	2446.8
12.5°	2495.8	2474.8	2411.6	2397.7	2371.9
15°	2453.7	2427.9	2348.7	2304.4	2281.1
17.5°	2404.7	2367.3	2269.2	2217.9	2180.5
20°	2348.7	2301.9	2185.2	2127.0	2075.5
22.5°	2288.0	2234.3	2098.7	2019.5	1984.6
25°	2227.3	2152.5	1998.4	1902.8	1867.7
27.5°	2155.0	2075.5	1905.1	1795.4	1741.6
30°	2078.0	1989.0	1802.2	1683.4	1620.2
32.5°	2003.1	1895.7	1704.4	1564.2	1505.7
35°	1919.1	1800.0	1594.7	1447.6	1396.1
37.5°	1837.5	1708.9	1491.9	1330.6	1272.5
40°	1751.0	1611.1	1384.4	1218.7	1158.0
42.5°	1662.3	1513.0	1277.1	1104.2	1046.1
45°	1569.0	1412.4	1167.4	1001.5	945.5
47.5°	1480.2	1314.6	1062.4	896.4	845.2
50°	1382.2	1216.5	959.6	798.3	749.6
52.5°	1286.3	1111.2	861.5	707.4	663.1
55°	1192.9	1010.8	758.7	618.8	574.4
57.5°	1097.3	910.5	667.8	537.0	499.6
60°	999.3	812.4	571.9	453.1	415.6
62.5°	903.6	716.8	490.2	378.3	359.6
65°	805.5	616.3	406.3	327.0	319.8
67.5°	712.1	522.9	327.0	287.0	280.2
70°	614.0	431.9	270.7	247.4	238.0
72.5°	520.7	347.8	226.4	207.9	203.1
75°	429.5	266.0	186.7	170.4	168.2
77.5°	338.6	189.0	147.1	137.7	133.0
80°	254.4	135.5	112.0	102.8	102.8
82.5°	177.4	91.1	77.0	72.3	72.3
85°	100.3	51.3	44.3	44.3	44.3
87.5°	37.4	18.5	18.5	16.3	16.3
90°	0.6	7.8	13.0	16.4	17.6
92.5°	16.4	13.7	15.7	17.0	17.6
95°	42.4	20.9	25.4	28.8	28.1
97.5°	76.4	22.9	33.3	35.3	35.9
100°	115.7	26.1	37.3	42.4	43.8
102.5°	158.7	157.5	38.5	45.7	47.7
105°	198.6	218.2	39.9	47.0	49.7
107.5°	245.0	261.3	41.2	48.3	51.0
110°	289.4	303.1	114.3	49.0	51.6

TEST NUMBER: P923563

CATALOG NUMBER: DFN2DIP-TR3F0-070D030US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	331.3	343.0	331.9	50.3	52.3
115°	375.6	386.7	403.1	100.6	53.6
117.5°	414.2	427.2	438.4	344.9	173.8
120°	457.3	467.1	478.8	486.7	398.5
122.5°	493.8	504.4	517.5	521.3	522.0
125°	531.1	539.6	552.1	556.6	558.6
127.5°	565.1	574.2	584.1	590.6	591.2
130°	597.1	607.6	614.7	621.9	621.3
132.5°	629.7	638.3	645.4	651.3	650.7
135°	657.2	667.7	673.5	680.1	678.8
137.5°	685.9	693.8	700.3	706.9	704.9
140°	714.0	719.3	726.4	732.3	729.1
142.5°	737.6	742.2	750.6	755.8	752.6
145°	762.4	761.7	772.8	777.4	774.1
147.5°	783.9	781.9	793.1	796.3	793.7
150°	804.9	800.3	810.7	814.6	811.4
152.5°	822.4	817.3	827.1	831.0	826.4
155°	839.5	833.7	841.4	845.3	840.2
157.5°	853.2	848.0	853.9	858.4	853.2
160°	865.0	861.0	865.0	868.9	864.2
162.5°	875.4	871.5	874.8	879.3	873.4
165°	884.5	880.7	882.6	887.2	882.6
167.5°	891.7	887.8	889.7	894.4	888.5
170°	897.6	893.7	895.0	899.6	893.7
172.5°	901.5	897.6	898.9	903.5	897.6
175°	904.7	900.2	901.5	906.1	899.6
177.5°	906.1	901.5	902.2	906.8	900.9
180°	902.9	902.9	902.9	902.9	902.9

TEST NUMBER: P923563

CATALOG NUMBER: DFN2DIP-TR3F0-070D030US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.59	13.58	13.39	14.40	15.41	8.56	9.55	9.37	10.38	11.39
	3H	14.27	15.15	15.09	15.98	17.03	9.76	10.64	10.58	11.48	12.52
	4H	14.88	15.71	15.71	16.55	17.60	10.21	11.05	11.05	11.89	12.94
	6H	15.30	16.07	16.15	16.92	17.98	10.54	11.30	11.39	12.15	13.22
	8H	15.43	16.16	16.28	17.02	18.09	10.63	11.36	11.49	12.23	13.29
	12H	15.49	16.18	16.35	17.04	18.14	10.68	11.37	11.54	12.23	13.32
4H	2H	12.62	13.46	13.46	14.30	15.35	9.17	10.01	10.01	10.85	11.90
	3H	14.46	15.15	15.31	16.02	17.09	10.53	11.22	11.38	12.10	13.17
	4H	15.15	15.78	16.01	16.65	17.74	11.08	11.71	11.95	12.58	13.68
	6H	15.66	16.20	16.54	17.10	18.20	11.50	12.04	12.38	12.94	14.04
	8H	15.83	16.34	16.72	17.23	18.34	11.63	12.14	12.51	13.03	14.14
	12H	15.93	16.39	16.83	17.30	18.41	11.70	12.15	12.60	13.06	14.18
8H	4H	15.13	15.63	16.01	16.52	17.63	11.37	11.87	12.25	12.76	13.88
	6H	15.69	16.11	16.60	17.04	18.15	11.88	12.30	12.79	13.23	14.35
	8H	15.90	16.27	16.82	17.19	18.32	12.07	12.44	12.99	13.37	14.50
	12H	16.04	16.36	16.96	17.28	18.46	12.19	12.52	13.11	13.43	14.62
12H	4H	15.08	15.54	15.99	16.45	17.57	11.38	11.83	12.28	12.74	13.86
	6H	15.66	16.03	16.58	16.96	18.09	11.93	12.30	12.85	13.23	14.36
	8H	15.88	16.21	16.81	17.13	18.31	12.14	12.47	13.06	13.39	14.57

END OF REPORT