

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923581

Luminaire Tested: DFN2DIP-TR3F0-070D080US940-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923581
REPORT IS A COMBINATION OF REPORTS P901869 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-070D080US940-FLLONL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13241.9 lumens
Efficiency: N/A
Efficacy: 100.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 131.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923581

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US940-FLLONL

Luminous Intensity Polar Plot

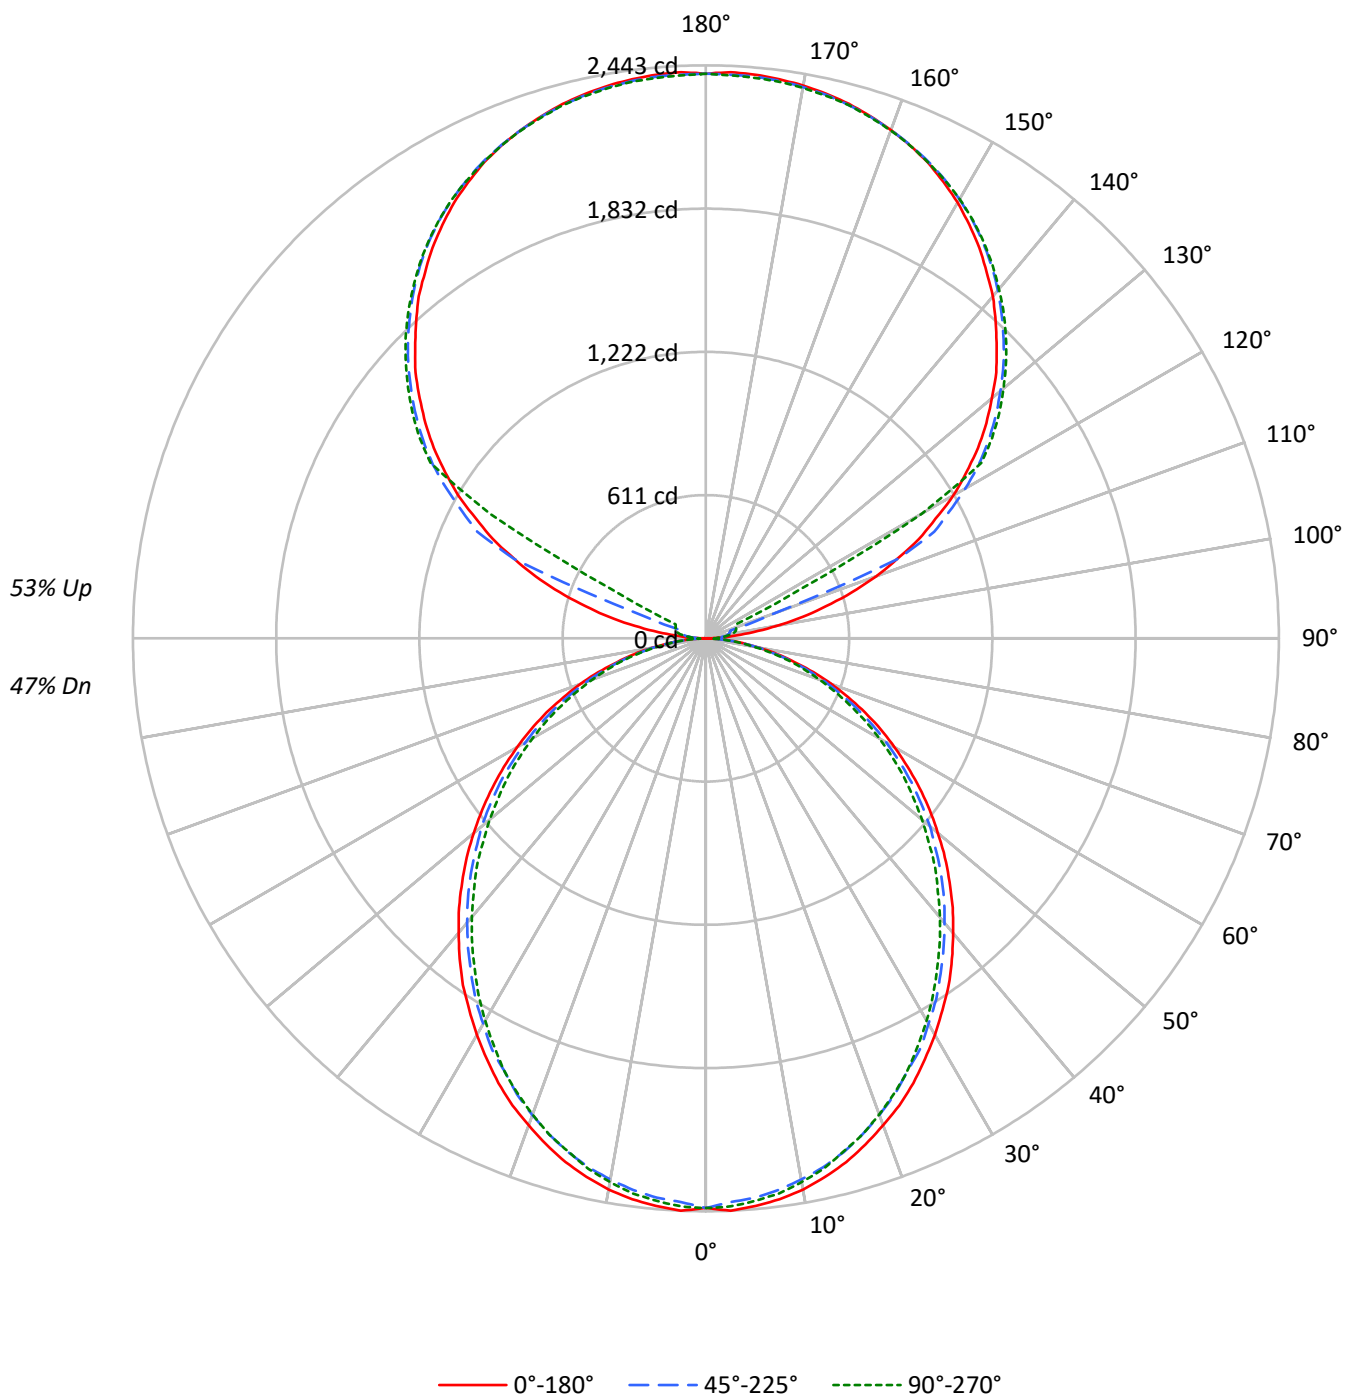

TEST NUMBER: P923581

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US940-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53
1	97	93	89	85	89	85	82	79	71	69	67	59	57	56	47	46	45
2	88	81	75	70	81	75	69	65	63	59	55	52	49	46	41	39	38
3	81	71	64	58	74	66	59	54	55	50	47	46	42	39	37	34	32
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	27	24
6	62	50	42	36	57	47	39	34	40	34	30	33	29	25	27	24	21
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	24	21	19
8	53	41	33	28	49	38	31	27	33	27	23	27	23	20	22	19	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3027	3027	3027
5°	3030	2982	3002
10°	3003	2939	2960
15°	2958	2888	2894
20°	2896	2818	2827
25°	2835	2735	2750
30°	2759	2658	2653
35°	2687	2567	2550
40°	2598	2475	2451
45°	2509	2383	2351
50°	2413	2286	2234
55°	2311	2174	2127
60°	2196	2042	2004
65°	2070	1904	1858
70°	1910	1735	1701
75°	1689	1534	1554
80°	1421	1276	1277
85°	1005	840	825

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2509 cd/sqm

TEST NUMBER: P923581

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US940-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	228.6	1.7
10°-20°	643.2	4.9
20°-30°	945.2	7.1
30°-40°	1097.8	8.3
40°-50°	1096.5	8.3
50°-60°	956.1	7.2
60°-70°	706.8	5.3
70°-80°	399.9	3.0
80°-90°	109.8	0.8
90°-100°	79.4	0.6
100°-110°	295.9	2.2
110°-120°	784.9	5.9
120°-130°	1301.8	9.8
130°-140°	1382.8	10.4
140°-150°	1285.1	9.7
150°-160°	1033.2	7.8
160°-170°	665.8	5.0
170°-180°	229.2	1.7
0°-30°	1817.0	13.7
0°-40°	2914.9	22.0
0°-60°	4967.4	37.5
0°-90°	6183.8	46.7
90°-120°	1160.2	8.8
90°-150°	5129.9	38.7
90°-180°	7058.0	53.3
0°-180°	13241.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2429	2429	2429	2429	2429	
5°	2429	2420	2394	2412	2408	231
15°	2312	2298	2268	2277	2266	651
25°	2093	2074	2034	2039	2034	963
35°	1805	1782	1745	1730	1719	1127
45°	1469	1453	1418	1392	1383	1134
55°	1112	1098	1070	1042	1030	994
65°	750	736	712	691	680	741
75°	392	388	376	362	367	419
85°	96	94	91	84	82	107
90°	2	21	35	44	47	12
95°	113	56	68	77	75	134
105°	530	582	106	125	132	566
115°	1002	1031	1075	268	143	986
125°	1416	1439	1472	1484	1489	1263
135°	1753	1780	1796	1814	1810	1354
145°	2033	2031	2061	2073	2064	1272
155°	2238	2223	2244	2254	2240	1032
165°	2359	2348	2354	2366	2354	666
175°	2413	2400	2404	2416	2399	230
180°	2408	2408	2408	2408	2408	

TEST NUMBER: P923581

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2428.8	2428.8	2428.8	2428.8	2428.8
2.5°	2442.9	2431.2	2405.5	2428.8	2424.3
5°	2428.8	2419.7	2393.9	2412.4	2408.0
7.5°	2412.4	2398.5	2372.8	2391.7	2386.9
10°	2386.9	2370.5	2342.5	2361.2	2354.2
12.5°	2351.7	2337.9	2309.9	2321.5	2316.8
15°	2312.1	2298.2	2267.7	2277.2	2265.5
17.5°	2263.0	2249.2	2218.7	2230.3	2218.7
20°	2209.2	2195.4	2162.7	2169.6	2160.4
22.5°	2155.7	2134.7	2104.2	2104.2	2099.4
25°	2092.6	2073.9	2034.3	2038.8	2034.3
27.5°	2022.4	2006.1	1975.9	1968.9	1957.2
30°	1952.6	1933.7	1898.8	1891.9	1882.4
32.5°	1877.7	1863.9	1826.4	1812.3	1802.9
35°	1805.4	1782.1	1744.6	1730.5	1718.9
37.5°	1723.6	1702.5	1665.1	1648.8	1637.1
40°	1639.6	1620.8	1583.3	1562.5	1553.1
42.5°	1557.8	1539.0	1501.8	1478.3	1464.4
45°	1469.1	1452.8	1417.6	1392.0	1382.6
47.5°	1382.6	1366.3	1328.8	1303.1	1289.2
50°	1291.5	1279.8	1247.1	1214.4	1202.7
52.5°	1202.7	1186.4	1156.2	1130.4	1114.0
55°	1111.8	1097.7	1069.7	1041.7	1030.0
57.5°	1020.7	1009.0	978.5	950.5	941.1
60°	929.4	920.2	887.6	861.8	854.9
62.5°	840.7	824.4	801.1	777.8	768.4
65°	749.8	735.7	712.4	691.3	679.7
67.5°	656.4	644.5	623.7	607.3	597.9
70°	569.9	560.5	539.4	523.1	513.9
72.5°	481.2	471.8	460.1	443.8	436.8
75°	392.3	387.8	375.9	362.0	366.8
77.5°	313.0	303.5	298.8	291.9	285.0
80°	233.6	231.2	226.5	219.5	214.8
82.5°	158.8	158.8	156.6	147.2	147.2
85°	95.7	93.5	91.2	84.0	81.8
87.5°	42.1	37.5	32.7	25.8	23.3
90°	1.7	20.9	34.8	43.6	47.0
92.5°	43.6	36.6	41.8	45.3	47.0
95°	113.2	55.6	67.9	76.8	74.9
97.5°	203.8	61.0	88.7	94.2	95.8
100°	308.4	69.7	99.3	113.2	116.6
102.5°	423.3	419.9	102.8	121.8	127.2
105°	529.6	581.9	106.3	125.4	132.4
107.5°	653.3	696.7	109.9	128.9	135.9
110°	771.9	808.2	305.0	130.7	137.6

TEST NUMBER: P923581

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	883.3	914.5	885.0	134.0	139.5
115°	1001.7	1031.3	1074.9	268.3	142.9
117.5°	1104.5	1139.2	1169.0	919.7	463.4
120°	1219.5	1245.5	1277.0	1297.9	1062.7
122.5°	1316.9	1344.9	1379.8	1390.2	1392.0
125°	1416.2	1439.0	1472.0	1484.3	1489.4
127.5°	1506.8	1531.2	1557.6	1574.8	1576.5
130°	1592.2	1620.1	1639.2	1658.5	1656.8
132.5°	1679.4	1702.1	1721.2	1736.9	1735.2
135°	1752.6	1780.5	1796.0	1813.6	1810.1
137.5°	1829.2	1850.0	1867.6	1885.0	1879.8
140°	1904.0	1918.1	1937.2	1952.8	1944.1
142.5°	1966.9	1979.1	2001.6	2015.5	2006.8
145°	2033.1	2031.2	2060.8	2073.0	2064.3
147.5°	2090.4	2085.3	2114.8	2123.5	2116.7
150°	2146.3	2134.0	2162.0	2172.3	2163.6
152.5°	2193.3	2179.3	2205.4	2216.0	2203.8
155°	2238.5	2223.0	2243.9	2254.2	2240.4
157.5°	2275.1	2261.3	2277.0	2289.2	2275.1
160°	2306.6	2296.1	2306.6	2316.9	2304.7
162.5°	2334.3	2324.0	2332.6	2344.8	2329.1
165°	2358.8	2348.4	2353.6	2365.7	2353.6
167.5°	2377.9	2367.4	2372.8	2385.0	2369.3
170°	2393.7	2383.1	2386.7	2398.9	2383.1
172.5°	2404.1	2393.7	2397.2	2409.4	2393.7
175°	2412.7	2400.5	2404.1	2416.2	2398.9
177.5°	2416.2	2404.1	2405.8	2418.1	2402.4
180°	2407.5	2407.5	2407.5	2407.5	2407.5

TEST NUMBER: P923581

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US940-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.75	11.59	11.74	12.58	13.90	10.33	11.16	11.31	12.16	13.47
	3H	12.40	13.15	13.40	14.16	15.50	11.94	12.68	12.93	13.69	15.03
	4H	12.98	13.69	13.99	14.70	16.05	12.52	13.22	13.52	14.23	15.58
	6H	13.37	14.03	14.39	15.04	16.40	12.91	13.56	13.92	14.57	15.93
	8H	13.47	14.09	14.50	15.13	16.48	13.01	13.63	14.03	14.66	16.01
	12H	13.52	14.11	14.55	15.13	16.51	13.04	13.63	14.07	14.66	16.04
4H	2H	11.21	11.92	12.22	12.93	14.27	10.87	11.57	11.88	12.58	13.93
	3H	13.06	13.65	14.09	14.69	16.05	12.67	13.26	13.70	14.30	15.66
	4H	13.77	14.31	14.80	15.34	16.72	13.37	13.91	14.40	14.94	16.32
	6H	14.27	14.74	15.31	15.79	17.17	13.87	14.33	14.91	15.39	16.77
	8H	14.42	14.85	15.46	15.90	17.29	14.01	14.44	15.05	15.49	16.89
	12H	14.48	14.88	15.54	15.94	17.34	14.07	14.46	15.13	15.52	16.92
8H	4H	13.96	14.39	15.00	15.44	16.83	13.60	14.03	14.64	15.08	16.48
	6H	14.58	14.94	15.64	16.02	17.42	14.22	14.58	15.28	15.67	17.06
	8H	14.79	15.11	15.86	16.18	17.59	14.43	14.74	15.50	15.82	17.23
	12H	14.91	15.19	15.99	16.26	17.71	14.54	14.81	15.61	15.88	17.33
12H	4H	13.94	14.33	15.00	15.39	16.79	13.59	13.98	14.65	15.05	16.45
	6H	14.60	14.92	15.68	15.99	17.40	14.26	14.57	15.33	15.65	17.06
	8H	14.84	15.12	15.92	16.18	17.64	14.49	14.76	15.56	15.83	17.28