

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926188

Luminaire Tested: DFN2DIP-TR3F0-030D040US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926188
REPORT IS A COMBINATION OF REPORTS P900285 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-030D040US950-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6210.5 lumens
Efficiency: N/A
Efficacy: 116.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 53.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926188

CATALOG NUMBER: DFN2DIP-TR3F0-030D040US950-FLLFLL

Luminous Intensity Polar Plot

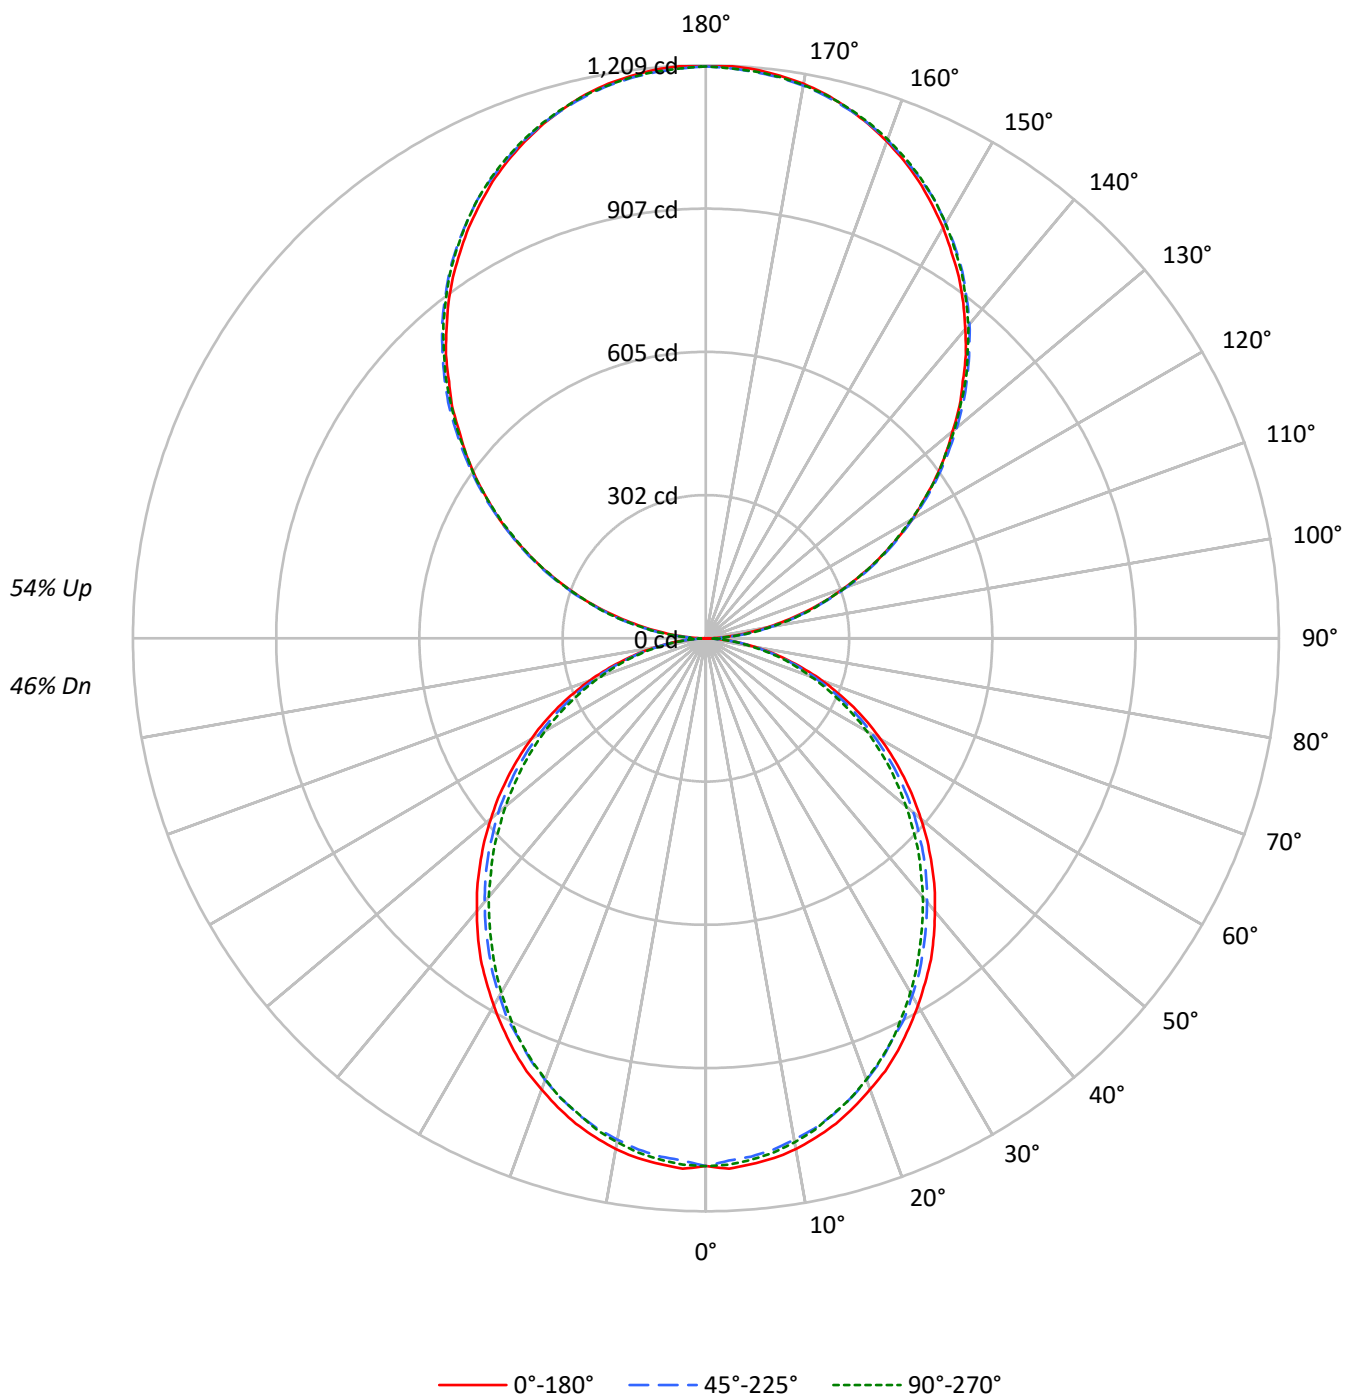

TEST NUMBER: P926188

CATALOG NUMBER: DFN2DIP-TR3F0-030D040US950-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	93	89	85	89	85	82	79	71	69	66	58	56	55	46	45	44
2	88	81	75	70	81	74	69	65	62	58	55	51	48	46	41	39	37
3	80	71	64	58	73	65	59	54	55	50	46	45	42	39	36	34	32
4	74	63	55	49	67	58	51	46	49	43	39	40	36	33	32	29	27
5	67	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24
6	62	50	42	36	57	46	39	34	39	34	30	33	28	25	26	23	21
7	57	45	37	32	53	42	35	30	36	30	26	30	25	22	24	21	19
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	17
9	50	37	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15
10	46	34	27	22	42	32	25	21	27	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1388	1388	1388
5°	1389	1367	1377
10°	1377	1348	1357
15°	1356	1324	1327
20°	1328	1292	1296
25°	1300	1254	1261
30°	1265	1219	1216
35°	1232	1177	1169
40°	1191	1135	1124
45°	1151	1093	1078
50°	1106	1048	1024
55°	1060	997	975
60°	1007	936	919
65°	949	873	852
70°	876	796	780
75°	774	703	713
80°	652	585	585
85°	461	385	378

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1176 cd/sqm

TEST NUMBER: P926188

CATALOG NUMBER: DFN2DIP-TR3F0-030D040US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.8	1.7
10°-20°	294.9	4.7
20°-30°	433.4	7.0
30°-40°	503.4	8.1
40°-50°	502.7	8.1
50°-60°	438.4	7.1
60°-70°	324.1	5.2
70°-80°	183.3	3.0
80°-90°	51.8	0.8
90°-100°	74.7	1.2
100°-110°	237.3	3.8
110°-120°	406.1	6.5
120°-130°	534.0	8.6
130°-140°	599.4	9.7
140°-150°	587.8	9.5
150°-160°	493.1	7.9
160°-170°	327.0	5.3
170°-180°	114.3	1.8
0°-30°	833.1	13.4
0°-40°	1336.5	21.5
0°-60°	2277.6	36.7
0°-90°	2836.8	45.7
90°-120°	718.0	11.6
90°-150°	2439.3	39.3
90°-180°	3374.0	54.3
0°-180°	6210.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1114	1114	1114	1114	1114	
5°	1114	1109	1098	1106	1104	106
15°	1060	1054	1040	1044	1039	299
25°	959	951	933	935	933	441
35°	828	817	800	793	788	517
45°	674	666	650	638	634	520
55°	510	503	490	478	472	456
65°	344	337	327	317	312	340
75°	180	178	172	166	168	192
85°	44	43	42	38	38	49
90°	1	13	36	34	34	6
95°	53	63	65	65	63	59
105°	219	222	224	226	226	231
115°	408	413	412	410	408	403
125°	593	602	599	596	594	530
135°	767	778	780	779	776	593
145°	931	938	944	945	941	582
155°	1064	1067	1070	1076	1072	490
165°	1158	1157	1157	1164	1159	327
175°	1205	1202	1200	1207	1201	114
180°	1207	1207	1207	1207	1207	

TEST NUMBER: P926188

CATALOG NUMBER: DFN2DIP-TR3F0-030D040US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1113.6	1113.6	1113.6	1113.6	1113.6
2.5°	1120.1	1114.7	1102.9	1113.6	1111.6
5°	1113.6	1109.4	1097.6	1106.2	1104.1
7.5°	1106.2	1099.8	1087.9	1096.6	1094.4
10°	1094.4	1086.9	1074.1	1082.6	1079.5
12.5°	1078.3	1071.9	1059.1	1064.4	1062.3
15°	1060.1	1053.8	1039.8	1044.1	1038.7
17.5°	1037.6	1031.3	1017.3	1022.6	1017.3
20°	1013.0	1006.6	991.6	994.7	990.5
22.5°	988.4	978.8	964.8	964.8	962.6
25°	959.4	950.9	932.7	934.8	932.7
27.5°	927.3	919.8	905.9	902.8	897.4
30°	895.2	886.6	870.6	867.4	863.1
32.5°	861.0	854.6	837.4	830.9	826.6
35°	827.8	817.1	799.9	793.4	788.1
37.5°	790.3	780.7	763.5	755.9	750.6
40°	751.8	743.2	726.0	716.5	712.2
42.5°	714.3	705.7	688.6	677.8	671.4
45°	673.6	666.1	650.0	638.2	633.9
47.5°	633.9	626.5	609.3	597.5	591.1
50°	592.1	586.8	571.8	556.8	551.5
52.5°	551.5	544.0	530.1	518.3	510.8
55°	509.8	503.3	490.5	477.7	472.3
57.5°	467.9	462.6	448.7	435.8	431.5
60°	426.2	422.0	407.0	395.1	392.0
62.5°	385.5	378.0	367.3	356.6	352.3
65°	343.8	337.3	326.6	317.0	311.7
67.5°	301.0	295.5	285.9	278.5	274.2
70°	261.3	257.0	247.4	239.8	235.6
72.5°	220.7	216.3	210.9	203.5	200.3
75°	179.8	177.8	172.4	166.0	168.2
77.5°	143.5	139.2	137.0	133.8	130.7
80°	107.1	106.0	103.8	100.6	98.5
82.5°	72.8	72.8	71.8	67.4	67.4
85°	43.9	42.8	41.8	38.5	37.5
87.5°	19.3	17.2	15.0	11.8	10.7
90°	1.0	13.1	35.7	33.5	34.5
92.5°	22.5	30.5	31.7	32.7	32.7
95°	53.1	63.3	65.2	65.2	63.3
97.5°	88.4	97.9	101.9	101.9	101.9
100°	129.2	137.6	140.4	140.4	139.4
102.5°	172.1	178.3	182.3	183.4	182.3
105°	219.0	221.9	224.1	225.9	225.9
107.5°	265.6	270.0	270.0	270.6	265.6
110°	310.7	316.5	316.5	316.5	313.7

TEST NUMBER: P926188

CATALOG NUMBER: DFN2DIP-TR3F0-030D040US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	359.5	365.7	364.5	361.7	359.5
115°	407.5	413.4	411.5	410.4	407.5
117.5°	455.2	463.2	458.1	455.2	452.3
120°	503.2	511.2	503.2	503.2	499.9
122.5°	546.8	557.0	552.0	549.0	546.8
125°	592.7	601.8	598.9	595.6	594.5
127.5°	637.5	648.7	644.7	640.3	637.5
130°	679.2	692.4	690.6	688.4	684.4
132.5°	726.2	736.4	737.2	732.0	729.1
135°	766.6	777.9	780.1	778.9	776.1
137.5°	811.8	820.8	822.6	821.9	817.6
140°	851.3	860.5	865.6	865.6	861.6
142.5°	892.2	901.2	904.1	905.3	901.2
145°	930.7	938.0	943.8	944.9	940.9
147.5°	965.3	974.3	978.7	980.5	976.5
150°	1000.9	1007.1	1011.1	1014.4	1011.1
152.5°	1032.6	1038.7	1043.9	1047.9	1043.9
155°	1064.2	1067.1	1070.4	1075.5	1072.2
157.5°	1091.6	1093.7	1095.5	1102.8	1097.7
160°	1115.9	1118.1	1119.1	1125.3	1121.0
162.5°	1138.4	1138.4	1139.6	1146.4	1141.4
165°	1157.8	1156.6	1156.6	1163.9	1158.8
167.5°	1175.2	1171.9	1171.9	1179.2	1174.1
170°	1188.3	1185.3	1184.3	1191.5	1185.3
172.5°	1197.4	1194.5	1193.4	1200.7	1194.5
175°	1204.7	1201.8	1199.6	1206.8	1200.7
177.5°	1208.7	1205.8	1203.6	1209.8	1203.6
180°	1206.8	1206.8	1206.8	1206.8	1206.8

TEST NUMBER: P926188

CATALOG NUMBER: DFN2DIP-TR3F0-030D040US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.94	8.77	8.94	9.77	11.10	7.51	8.34	8.51	9.34	10.68
	3H	9.59	10.33	10.60	11.34	12.70	9.12	9.86	10.13	10.88	12.23
	4H	10.17	10.87	11.19	11.89	13.25	9.70	10.40	10.72	11.42	12.78
	6H	10.56	11.21	11.59	12.23	13.60	10.09	10.74	11.12	11.76	13.13
	8H	10.66	11.27	11.69	12.31	13.68	10.19	10.81	11.23	11.85	13.21
	12H	10.71	11.29	11.74	12.32	13.71	10.23	10.81	11.27	11.85	13.24
4H	2H	8.40	9.10	9.42	10.11	11.47	8.05	8.75	9.08	9.77	11.13
	3H	10.25	10.83	11.28	11.88	13.25	9.86	10.44	10.89	11.49	12.86
	4H	10.95	11.49	11.99	12.53	13.92	10.55	11.09	11.59	12.13	13.52
	6H	11.46	11.92	12.51	12.98	14.37	11.05	11.51	12.10	12.57	13.97
	8H	11.60	12.03	12.65	13.09	14.49	11.20	11.63	12.25	12.68	14.09
	12H	11.67	12.06	12.74	13.13	14.54	11.25	11.64	12.32	12.71	14.12
8H	4H	11.14	11.57	12.19	12.63	14.03	10.79	11.22	11.84	12.27	13.68
	6H	11.76	12.12	12.84	13.21	14.62	11.40	11.76	12.48	12.85	14.26
	8H	11.98	12.29	13.06	13.37	14.79	11.61	11.92	12.69	13.00	14.43
	12H	12.10	12.37	13.18	13.45	14.91	11.72	12.00	12.81	13.07	14.53
12H	4H	11.13	11.51	12.19	12.58	14.00	10.78	11.17	11.85	12.23	13.65
	6H	11.79	12.10	12.87	13.18	14.61	11.44	11.75	12.52	12.83	14.26
	8H	12.02	12.30	13.11	13.37	14.84	11.67	11.94	12.75	13.02	14.48