

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926362

Luminaire Tested: DFN2DIP-TR3F0-090D080US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926362
REPORT IS A COMBINATION OF REPORTS P900354 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-090D080US950-RLLFLL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14052.4 lumens
Efficiency: N/A
Efficacy: 90.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 156
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926362

CATALOG NUMBER: DFN2DIP-TR3F0-090D080US950-RLLFLL

Luminous Intensity Polar Plot

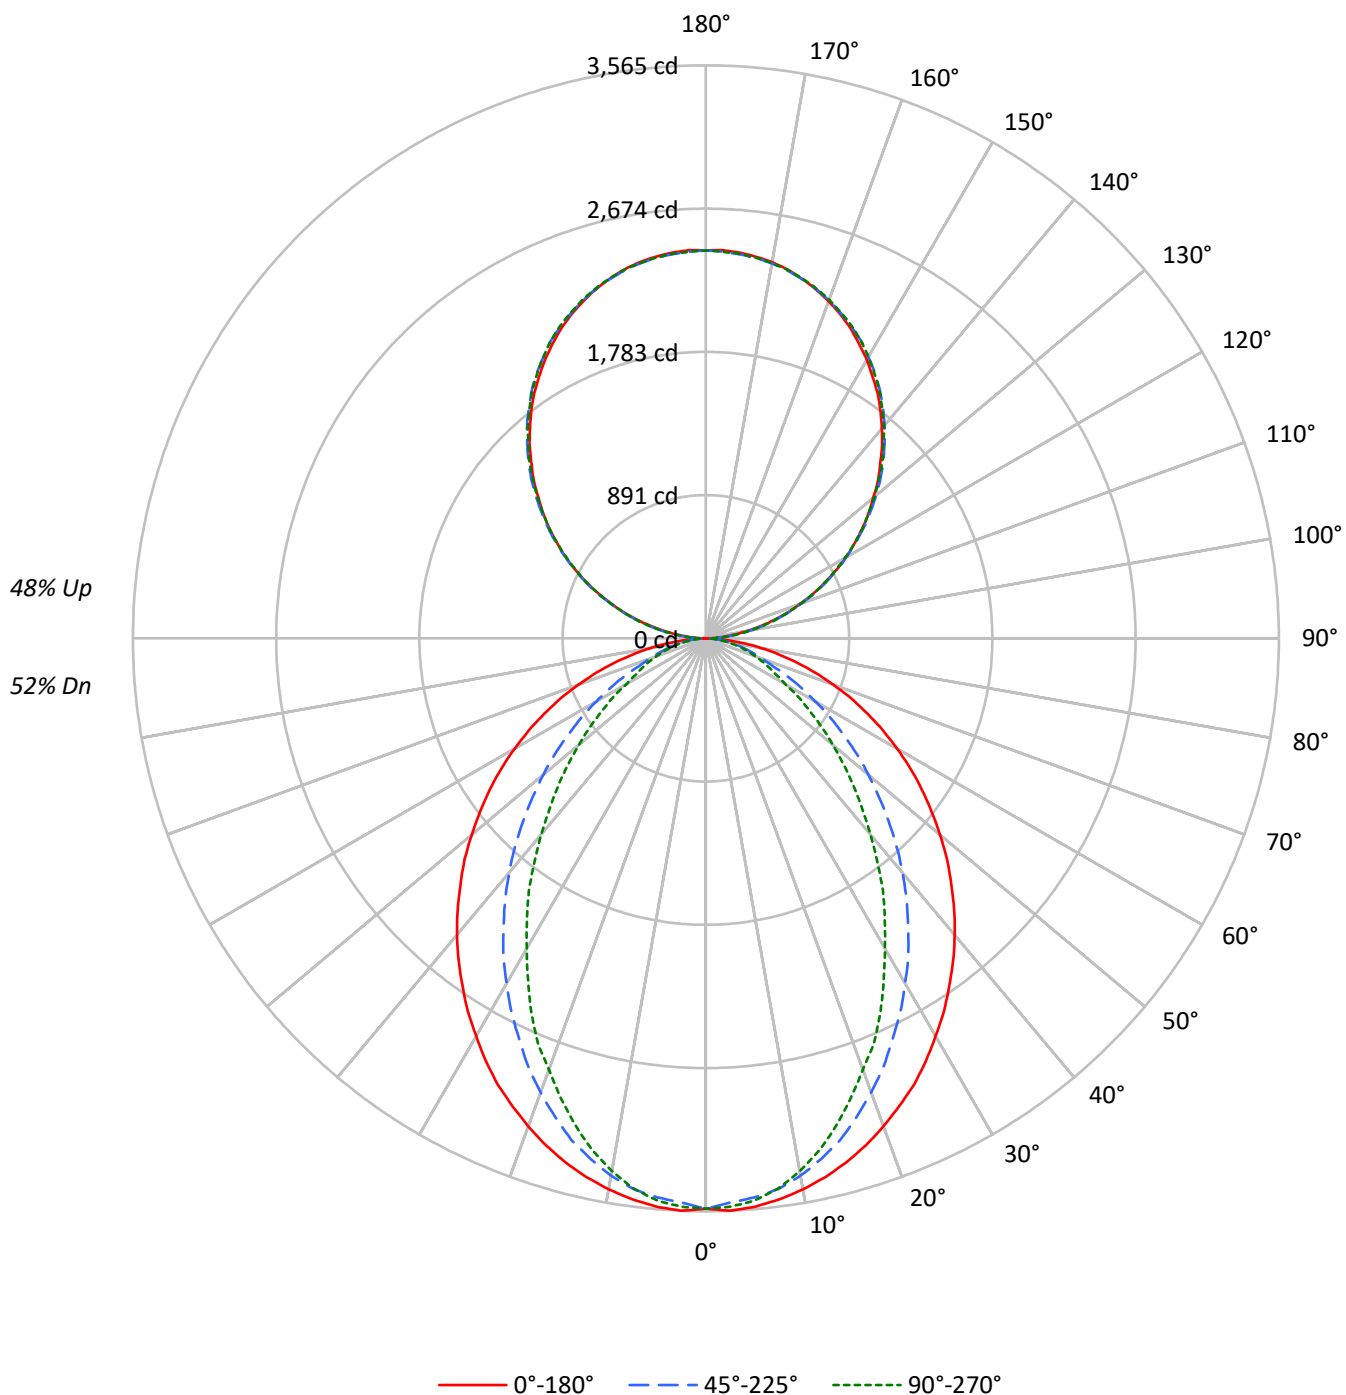

TEST NUMBER: P926362

CATALOG NUMBER: DFN2DIP-TR3F0-090D080US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	84	84	84	71	71	71	58	58	58
1	99	95	91	88	91	88	84	82	75	72	70	63	61	60	52	51	50
2	90	83	77	72	83	77	72	68	66	62	59	56	53	51	46	44	43
3	83	74	66	61	76	68	62	57	59	54	50	50	46	44	42	39	37
4	76	65	58	52	70	61	54	49	53	47	43	45	41	38	37	35	32
5	70	59	51	45	65	55	48	42	47	42	38	40	36	33	34	31	28
6	65	53	45	39	60	49	42	37	43	37	33	37	32	29	31	28	25
7	60	48	40	35	55	45	38	33	39	33	29	34	29	26	28	25	23
8	56	44	36	31	51	41	34	29	36	30	26	31	27	23	26	23	21
9	52	40	33	28	48	37	31	26	33	27	24	28	24	21	24	21	19
10	49	37	30	25	45	34	28	24	30	25	21	26	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4422	4422	4422
5°	4427	4348	4377
10°	4380	4259	4231
15°	4318	4115	4009
20°	4235	3917	3736
25°	4151	3697	3473
30°	4039	3470	3140
35°	3929	3228	2848
40°	3817	2977	2514
45°	3686	2700	2211
50°	3552	2420	1915
55°	3411	2121	1631
60°	3247	1810	1340
65°	3059	1493	1203
70°	2831	1198	1084
75°	2544	1048	980
80°	2129	868	840
85°	1448	562	615

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3686 cd/sqm

TEST NUMBER: P926362

CATALOG NUMBER: DFN2DIP-TR3F0-090D080US950-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.6	2.4
10°-20°	913.0	6.5
20°-30°	1281.8	9.1
30°-40°	1397.3	9.9
40°-50°	1284.2	9.1
50°-60°	1008.6	7.2
60°-70°	656.5	4.7
70°-80°	337.9	2.4
80°-90°	93.1	0.7
90°-100°	149.4	1.1
100°-110°	474.6	3.4
110°-120°	812.1	5.8
120°-130°	1068.1	7.6
130°-140°	1198.9	8.5
140°-150°	1175.6	8.4
150°-160°	986.2	7.0
160°-170°	654.0	4.7
170°-180°	228.6	1.6
0°-30°	2527.4	18.0
0°-40°	3924.6	27.9
0°-60°	6217.4	44.2
0°-90°	7305.0	52.0
90°-120°	1436.1	10.2
90°-150°	4878.6	34.7
90°-180°	6747.0	48.0
0°-180°	14052.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3549	3549	3549	3549	3549	
5°	3549	3533	3491	3520	3510	336
15°	3375	3340	3231	3170	3138	951
25°	3064	2961	2749	2617	2569	1409
35°	2640	2476	2194	1991	1920	1652
45°	2158	1943	1606	1378	1300	1667
55°	1641	1390	1044	851	790	1466
65°	1108	848	559	450	440	1099
75°	591	366	257	234	231	625
85°	138	70	61	61	61	158
90°	2	26	71	67	69	14
95°	106	127	130	130	127	118
105°	438	444	448	452	452	462
115°	815	827	823	821	815	806
125°	1185	1204	1198	1191	1189	1059
135°	1533	1556	1560	1558	1552	1185
145°	1861	1876	1888	1890	1882	1163
155°	2128	2134	2141	2151	2144	980
165°	2316	2313	2313	2328	2318	653
175°	2409	2404	2399	2414	2401	229
180°	2414	2414	2414	2414	2414	

TEST NUMBER: P926362

CATALOG NUMBER: DFN2DIP-TR3F0-090D080US950-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3548.6	3548.6	3548.6	3548.6	3548.6
2.5°	3564.6	3548.6	3513.1	3545.5	3539.1
5°	3548.6	3532.6	3490.7	3519.6	3510.1
7.5°	3519.6	3500.5	3455.6	3468.2	3452.1
10°	3481.1	3458.6	3394.6	3384.7	3365.6
12.5°	3433.1	3404.2	3317.2	3298.2	3262.7
15°	3375.2	3339.8	3230.7	3169.7	3137.7
17.5°	3307.7	3256.3	3121.3	3050.8	2999.4
20°	3230.7	3166.3	3005.8	2925.7	2854.8
22.5°	3147.2	3073.3	2886.9	2777.9	2729.9
25°	3063.8	2960.8	2749.0	2617.4	2569.0
27.5°	2964.3	2854.8	2620.4	2469.5	2395.6
30°	2858.3	2736.0	2479.1	2315.5	2228.6
32.5°	2755.3	2607.5	2344.5	2151.7	2071.2
35°	2639.9	2476.0	2193.5	1991.2	1920.3
37.5°	2527.4	2350.7	2052.1	1830.3	1750.3
40°	2408.6	2216.0	1904.3	1676.4	1592.9
42.5°	2286.5	2081.2	1756.7	1519.0	1438.8
45°	2158.1	1942.8	1605.8	1377.5	1300.5
47.5°	2036.1	1808.2	1461.3	1233.0	1162.5
50°	1901.2	1673.2	1320.0	1098.1	1031.0
52.5°	1769.4	1528.5	1185.1	973.1	912.1
55°	1640.9	1390.5	1043.6	851.2	790.1
57.5°	1509.4	1252.5	918.6	738.7	687.3
60°	1374.4	1117.5	786.8	623.2	571.7
62.5°	1243.0	986.1	674.3	520.3	494.7
65°	1108.0	847.7	558.8	449.7	439.9
67.5°	979.6	719.2	449.7	394.9	385.3
70°	844.7	594.2	372.4	340.4	327.4
72.5°	716.2	478.3	311.4	285.8	279.4
75°	590.8	366.0	256.9	234.4	231.3
77.5°	465.7	260.0	202.3	189.5	183.0
80°	349.9	186.4	154.0	141.4	141.4
82.5°	243.9	125.4	106.0	99.5	99.5
85°	137.9	70.5	61.0	61.0	61.0
87.5°	51.4	25.6	25.6	22.5	22.5
90°	2.2	26.2	71.4	67.0	69.2
92.5°	45.1	61.2	63.3	65.4	65.4
95°	106.3	126.6	130.2	130.2	126.6
97.5°	176.9	195.8	203.8	203.8	203.8
100°	258.3	275.0	280.9	280.9	278.7
102.5°	344.2	356.6	364.5	366.7	364.5
105°	438.1	443.9	448.3	451.9	451.9
107.5°	531.2	540.0	540.0	541.4	531.2
110°	621.4	633.1	633.1	633.1	627.3

TEST NUMBER: P926362

CATALOG NUMBER: DFN2DIP-TR3F0-090D080US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	718.9	731.3	729.1	723.3	718.9
115°	815.0	826.6	823.0	820.8	815.0
117.5°	910.3	926.3	916.1	910.3	904.5
120°	1006.4	1022.4	1006.4	1006.4	999.8
122.5°	1093.7	1114.1	1103.9	1098.1	1093.7
125°	1185.3	1203.6	1197.7	1191.2	1189.1
127.5°	1274.9	1297.4	1289.4	1280.7	1274.9
130°	1358.6	1384.7	1381.1	1376.8	1368.8
132.5°	1452.5	1472.8	1474.3	1464.1	1458.3
135°	1533.2	1555.8	1560.2	1558.0	1552.2
137.5°	1623.4	1641.6	1645.3	1643.8	1635.1
140°	1702.8	1720.9	1731.1	1731.1	1723.1
142.5°	1784.3	1802.5	1808.3	1810.5	1802.5
145°	1861.4	1875.9	1887.6	1889.8	1881.8
147.5°	1930.5	1948.7	1957.4	1961.1	1953.1
150°	2001.9	2014.2	2022.2	2028.8	2022.2
152.5°	2065.1	2077.5	2087.7	2095.7	2087.7
155°	2128.5	2134.3	2140.9	2151.0	2144.5
157.5°	2183.0	2187.4	2191.1	2205.6	2195.4
160°	2231.8	2236.2	2238.4	2250.7	2242.0
162.5°	2276.9	2276.9	2279.1	2292.9	2282.7
165°	2315.5	2313.3	2313.3	2327.9	2317.6
167.5°	2350.4	2343.9	2343.9	2358.4	2348.2
170°	2376.6	2370.8	2368.6	2383.2	2370.8
172.5°	2394.8	2389.0	2386.8	2401.3	2389.0
175°	2409.3	2403.5	2399.1	2413.7	2401.3
177.5°	2417.3	2411.5	2407.1	2419.5	2407.1
180°	2413.7	2413.7	2413.7	2413.7	2413.7

TEST NUMBER: P926362

CATALOG NUMBER: DFN2DIP-TR3F0-090D080US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.44	13.29	13.39	14.25	15.49	8.42	9.27	9.37	10.22	11.47
	3H	14.11	14.87	15.07	15.84	17.11	9.60	10.36	10.56	11.33	12.60
	4H	14.72	15.43	15.69	16.40	17.68	10.05	10.77	11.02	11.74	13.02
	6H	15.13	15.79	16.11	16.77	18.06	10.37	11.03	11.35	12.00	13.29
	8H	15.25	15.88	16.24	16.87	18.16	10.46	11.08	11.45	12.08	13.36
	12H	15.31	15.91	16.30	16.89	18.20	10.50	11.09	11.49	12.08	13.39
4H	2H	12.46	13.18	13.44	14.15	15.43	9.01	9.73	9.99	10.70	11.98
	3H	14.28	14.88	15.27	15.88	17.17	10.36	10.95	11.34	11.95	13.24
	4H	14.97	15.51	15.96	16.50	17.82	10.90	11.44	11.90	12.44	13.75
	6H	15.47	15.94	16.48	16.96	18.27	11.31	11.78	12.32	12.80	14.11
	8H	15.64	16.08	16.65	17.09	18.42	11.44	11.88	12.45	12.89	14.21
	12H	15.73	16.13	16.76	17.15	18.49	11.50	11.90	12.53	12.92	14.25
8H	4H	14.93	15.37	15.94	16.38	17.71	11.18	11.61	12.18	12.62	13.95
	6H	15.49	15.85	16.52	16.90	18.23	11.69	12.05	12.72	13.10	14.42
	8H	15.70	16.02	16.74	17.06	18.40	11.87	12.19	12.91	13.23	14.57
	12H	15.83	16.11	16.88	17.15	18.53	11.99	12.27	13.03	13.30	14.69
12H	4H	14.89	15.28	15.91	16.31	17.64	11.18	11.57	12.21	12.60	13.93
	6H	15.47	15.78	16.51	16.82	18.17	11.73	12.05	12.77	13.09	14.43
	8H	15.68	15.96	16.72	16.99	18.38	11.94	12.22	12.98	13.25	14.64