

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904564

Luminaire Tested: DFN2DIP-TR4F0-040D090US830-RLFL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904564
REPORT IS A COMBINATION OF REPORTS P900460 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D090US830-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10712.0 lumens
Efficiency: N/A
Efficacy: 107.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 99.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904564

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLFLL

Luminous Intensity Polar Plot

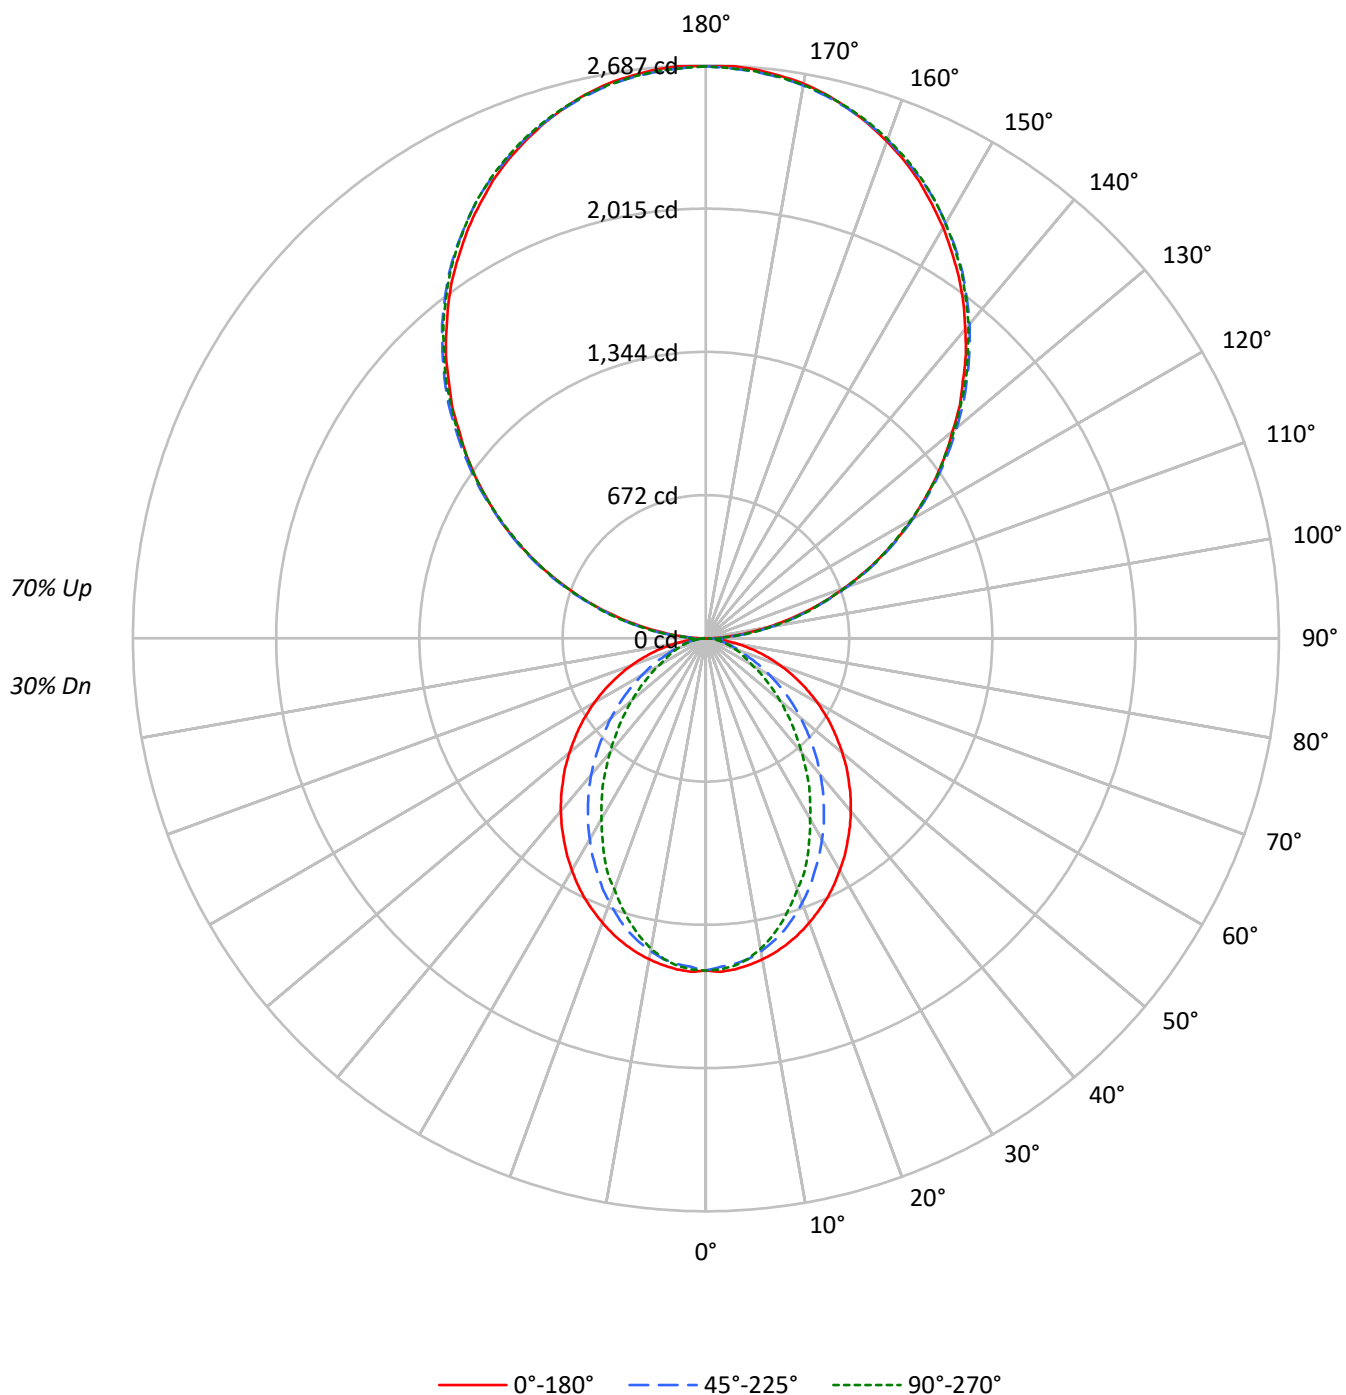

TEST NUMBER: P904564

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	89	86	83	84	80	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	38	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	33	29	32	27	24	25	22	19	18	16	14
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	36	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	19	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1238	1238	1238
5°	1240	1218	1226
10°	1228	1194	1186
15°	1211	1155	1124
20°	1188	1100	1049
25°	1165	1039	975
30°	1135	977	883
35°	1105	910	801
40°	1074	840	708
45°	1038	763	623
50°	1002	685	541
55°	963	602	461
60°	919	514	380
65°	867	426	342
70°	806	343	309
75°	728	303	281
80°	615	254	244
85°	429	170	183

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2090 cd/sqm

TEST NUMBER: P904564

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	1.4
10°-20°	400.9	3.7
20°-30°	562.8	5.3
30°-40°	613.5	5.7
40°-50°	563.9	5.3
50°-60°	442.9	4.1
60°-70°	288.3	2.7
70°-80°	148.4	1.4
80°-90°	45.5	0.4
90°-100°	166.0	1.5
100°-110°	527.5	4.9
110°-120°	902.7	8.4
120°-130°	1187.2	11.1
130°-140°	1332.5	12.4
140°-150°	1306.7	12.2
150°-160°	1096.1	10.2
160°-170°	726.9	6.8
170°-180°	254.1	2.4
0°-30°	1109.8	10.4
0°-40°	1723.3	16.1
0°-60°	2730.1	25.5
0°-90°	3212.2	30.0
90°-120°	1596.2	14.9
90°-150°	5422.6	50.6
90°-180°	7500.0	70.0
0°-180°	10712.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	2	29	79	74	77	11
95°	118	141	145	145	141	131
105°	487	493	498	502	502	514
115°	906	919	915	912	906	896
125°	1318	1338	1331	1324	1322	1177
135°	1704	1729	1734	1732	1725	1317
145°	2069	2085	2098	2100	2092	1293
155°	2366	2372	2380	2391	2384	1089
165°	2574	2571	2571	2587	2576	726
175°	2678	2671	2667	2683	2669	254
180°	2683	2683	2683	2683	2683	

TEST NUMBER: P904564

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	2.5	29.1	79.3	74.4	76.8
92.5°	50.1	68.0	70.4	72.8	72.8
95°	118.1	140.7	144.8	144.8	140.7
97.5°	196.5	217.5	226.5	226.5	226.5
100°	287.1	305.8	312.2	312.2	309.8
102.5°	382.6	396.3	405.2	407.6	405.2
105°	486.9	493.3	498.2	502.3	502.3
107.5°	590.4	600.1	600.1	601.7	590.4
110°	690.7	703.7	703.7	703.7	697.2

TEST NUMBER: P904564

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	799.1	812.8	810.4	804.0	799.1
115°	905.9	918.8	914.7	912.4	905.9
117.5°	1011.8	1029.6	1018.3	1011.8	1005.3
120°	1118.6	1136.3	1118.6	1118.6	1111.3
122.5°	1215.6	1238.3	1227.0	1220.5	1215.6
125°	1317.6	1337.8	1331.3	1324.0	1321.6
127.5°	1417.0	1442.1	1433.2	1423.5	1417.0
130°	1510.0	1539.2	1535.1	1530.2	1521.4
132.5°	1614.4	1637.0	1638.6	1627.3	1620.9
135°	1704.1	1729.2	1734.1	1731.6	1725.2
137.5°	1804.4	1824.7	1828.7	1827.1	1817.4
140°	1892.6	1912.8	1924.1	1924.1	1915.2
142.5°	1983.2	2003.4	2009.9	2012.3	2003.4
145°	2069.0	2085.1	2098.0	2100.5	2091.6
147.5°	2145.8	2166.0	2175.7	2179.7	2170.9
150°	2225.1	2238.8	2247.7	2254.9	2247.7
152.5°	2295.4	2309.1	2320.4	2329.4	2320.4
155°	2365.8	2372.2	2379.5	2390.9	2383.6
157.5°	2426.4	2431.3	2435.3	2451.5	2440.1
160°	2480.6	2485.5	2487.9	2501.6	2491.9
162.5°	2530.7	2530.7	2533.2	2548.5	2537.2
165°	2573.6	2571.2	2571.2	2587.4	2576.1
167.5°	2612.4	2605.2	2605.2	2621.3	2610.0
170°	2641.6	2635.1	2632.7	2648.8	2635.1
172.5°	2661.7	2655.3	2652.9	2669.1	2655.3
175°	2678.0	2671.4	2666.6	2682.9	2669.1
177.5°	2686.8	2680.4	2675.5	2689.3	2675.5
180°	2682.9	2682.9	2682.9	2682.9	2682.9

TEST NUMBER: P904564

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.65	6.34	6.76	7.44	8.98	1.62	2.31	2.74	3.42	4.95
	3H	7.31	7.93	8.44	9.05	10.60	2.80	3.41	3.92	4.53	6.08
	4H	7.91	8.50	9.05	9.62	11.17	3.24	3.83	4.38	4.94	6.50
	6H	8.33	8.87	9.47	9.99	11.55	3.56	4.10	4.70	5.21	6.78
	8H	8.45	8.96	9.60	10.10	11.66	3.64	4.16	4.79	5.29	6.85
	12H	8.51	8.99	9.66	10.12	11.70	3.68	4.17	4.83	5.30	6.88
4H	2H	5.65	6.23	6.79	7.35	8.90	2.20	2.78	3.34	3.90	5.45
	3H	7.46	7.95	8.61	9.09	10.66	3.53	4.02	4.68	5.17	6.73
	4H	8.15	8.60	9.30	9.73	11.32	4.08	4.53	5.23	5.66	7.24
	6H	8.66	9.04	9.81	10.19	11.77	4.49	4.87	5.65	6.03	7.61
	8H	8.83	9.19	9.98	10.33	11.93	4.62	4.97	5.77	6.12	7.71
	12H	8.92	9.24	10.09	10.40	12.00	4.68	5.00	5.85	6.16	7.76
8H	4H	8.11	8.46	9.26	9.61	11.20	4.35	4.71	5.50	5.85	7.45
	6H	8.67	8.96	9.84	10.15	11.74	4.86	5.16	6.04	6.35	7.94
	8H	8.88	9.14	10.06	10.31	11.92	5.05	5.31	6.23	6.48	8.09
	12H	9.02	9.24	10.20	10.41	12.05	5.17	5.39	6.35	6.56	8.20
12H	4H	8.05	8.38	9.22	9.53	11.13	4.35	4.67	5.52	5.83	7.43
	6H	8.64	8.90	9.82	10.07	11.68	4.91	5.17	6.09	6.34	7.95
	8H	8.86	9.08	10.04	10.25	11.89	5.12	5.34	6.30	6.51	8.15