

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904565

Luminaire Tested: DFN2DIP-TR4F0-040D090US830-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904565
REPORT IS A COMBINATION OF REPORTS P901980 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D090US830-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11602.7 lumens
Efficiency: N/A
Efficacy: 116.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 99.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904565

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLONL

Luminous Intensity Polar Plot

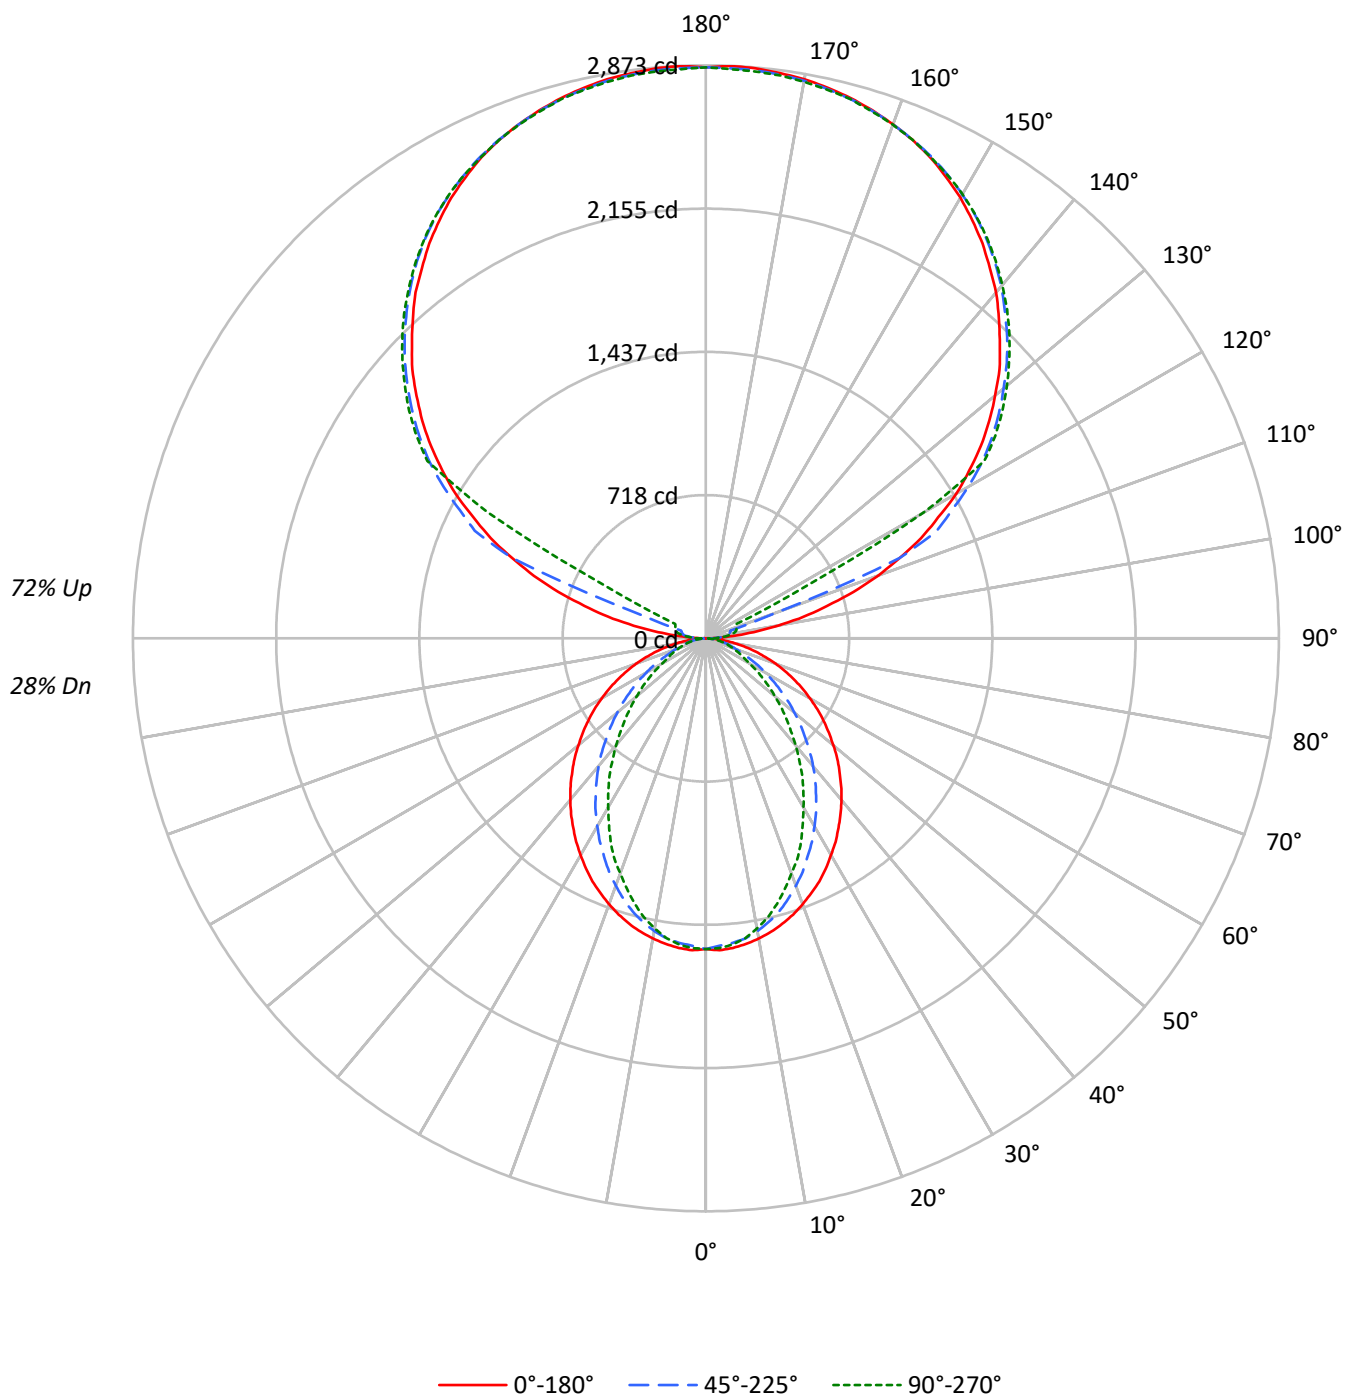

TEST NUMBER: P904565

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	77	74	62	60	59	46	45	44	32	31	31
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	28	27	26
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	25	24	22
4	71	61	53	48	63	55	48	44	43	39	35	33	30	27	23	21	20
5	65	54	47	41	58	49	42	37	39	34	30	29	26	24	21	19	17
6	60	49	41	35	54	44	37	32	35	30	27	27	23	21	19	17	15
7	55	44	36	31	49	40	33	28	32	27	23	24	21	18	17	15	14
8	51	40	32	27	46	36	30	25	29	24	21	22	19	16	16	14	12
9	48	36	29	24	43	33	27	22	26	22	19	20	17	15	15	13	11
10	45	33	26	22	40	30	24	20	24	20	17	19	16	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1238	1238	1238
5°	1240	1218	1226
10°	1228	1194	1186
15°	1211	1155	1124
20°	1188	1100	1049
25°	1165	1039	975
30°	1135	977	883
35°	1105	910	801
40°	1074	840	708
45°	1038	763	623
50°	1002	685	541
55°	963	602	461
60°	919	514	380
65°	867	426	342
70°	806	343	309
75°	728	303	281
80°	615	254	244
85°	429	170	183

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1519 cd/sqm

TEST NUMBER: P904565

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	1.3
10°-20°	400.9	3.5
20°-30°	562.8	4.9
30°-40°	613.5	5.3
40°-50°	563.9	4.9
50°-60°	442.9	3.8
60°-70°	288.3	2.5
70°-80°	148.4	1.3
80°-90°	42.9	0.4
90°-100°	94.4	0.8
100°-110°	351.9	3.0
110°-120°	933.3	8.0
120°-130°	1548.0	13.3
130°-140°	1644.3	14.2
140°-150°	1528.2	13.2
150°-160°	1228.6	10.6
160°-170°	791.7	6.8
170°-180°	272.5	2.3
0°-30°	1109.8	9.6
0°-40°	1723.3	14.9
0°-60°	2730.1	23.5
0°-90°	3209.7	27.7
90°-120°	1379.6	11.9
90°-150°	6100.2	52.6
90°-180°	8393.0	72.3
0°-180°	11602.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	2	25	41	52	56	11
95°	135	66	81	91	89	159
105°	630	692	126	149	157	673
115°	1191	1226	1278	319	170	1173
125°	1684	1711	1750	1765	1771	1502
135°	2084	2117	2136	2157	2152	1610
145°	2418	2415	2451	2465	2455	1512
155°	2662	2644	2668	2681	2664	1227
165°	2805	2792	2799	2813	2799	792
175°	2869	2854	2859	2873	2852	273
180°	2863	2863	2863	2863	2863	

TEST NUMBER: P904565

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	2.0	24.9	41.3	51.9	55.8
92.5°	51.9	43.5	49.7	53.9	55.8
95°	134.6	66.2	80.7	91.2	89.1
97.5°	242.3	72.6	105.6	111.9	113.9
100°	366.7	82.9	118.1	134.6	138.7
102.5°	503.3	499.4	122.2	144.9	151.3
105°	629.7	692.0	126.4	149.1	157.4
107.5°	776.8	828.5	130.6	153.3	161.6
110°	917.8	961.1	362.6	155.4	163.6

TEST NUMBER: P904565

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1050.4	1087.5	1052.3	159.4	165.8
115°	1191.1	1226.2	1278.2	319.1	169.9
117.5°	1313.3	1354.7	1390.1	1093.7	551.0
120°	1450.1	1481.1	1518.5	1543.3	1263.7
122.5°	1566.0	1599.2	1640.8	1653.0	1655.3
125°	1684.0	1711.1	1750.5	1765.0	1771.1
127.5°	1791.8	1820.8	1852.1	1872.7	1874.7
130°	1893.4	1926.7	1949.3	1972.1	1970.2
132.5°	1997.0	2024.0	2046.6	2065.4	2063.4
135°	2084.1	2117.2	2135.7	2156.6	2152.5
137.5°	2175.1	2199.9	2220.8	2241.5	2235.3
140°	2264.1	2280.9	2303.5	2322.1	2311.9
142.5°	2338.9	2353.4	2380.2	2396.7	2386.4
145°	2417.6	2415.4	2450.6	2465.1	2454.8
147.5°	2485.8	2479.6	2514.8	2525.2	2517.0
150°	2552.2	2537.7	2570.9	2583.1	2572.9
152.5°	2608.0	2591.5	2622.5	2635.1	2620.6
155°	2661.9	2643.5	2668.2	2680.6	2664.1
157.5°	2705.5	2689.0	2707.6	2722.2	2705.5
160°	2742.8	2730.3	2742.8	2755.1	2740.6
162.5°	2775.8	2763.4	2773.8	2788.3	2769.7
165°	2804.8	2792.5	2798.7	2813.2	2798.7
167.5°	2827.7	2815.2	2821.5	2836.0	2817.4
170°	2846.4	2833.8	2838.0	2852.5	2833.8
172.5°	2858.7	2846.4	2850.5	2865.0	2846.4
175°	2869.0	2854.5	2858.7	2873.2	2852.5
177.5°	2873.2	2858.7	2860.9	2875.4	2856.8
180°	2862.9	2862.9	2862.9	2862.9	2862.9

TEST NUMBER: P904565

CATALOG NUMBER: DFN2DIP-TR4F0-040D090US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.32	6.00	6.45	7.12	8.68	1.29	1.97	2.43	3.09	4.65
	3H	6.99	7.59	8.13	8.72	10.29	2.47	3.07	3.61	4.20	5.78
	4H	7.59	8.16	8.74	9.29	10.87	2.91	3.49	4.06	4.62	6.20
	6H	8.00	8.53	9.16	9.66	11.25	3.23	3.76	4.39	4.89	6.48
	8H	8.12	8.62	9.28	9.77	11.35	3.31	3.82	4.47	4.96	6.55
	12H	8.18	8.65	9.34	9.79	11.40	3.35	3.83	4.52	4.97	6.58
4H	2H	5.32	5.89	6.48	7.02	8.60	1.87	2.44	3.03	3.57	5.15
	3H	7.13	7.61	8.30	8.77	10.36	3.21	3.68	4.37	4.84	6.43
	4H	7.82	8.26	8.98	9.40	11.02	3.75	4.19	4.91	5.33	6.94
	6H	8.33	8.70	9.50	9.87	11.47	4.16	4.54	5.33	5.70	7.30
	8H	8.50	8.85	9.67	10.01	11.63	4.29	4.64	5.45	5.79	7.41
	12H	8.59	8.90	9.77	10.07	11.70	4.34	4.66	5.53	5.83	7.46
8H	4H	7.78	8.13	8.94	9.29	10.90	4.02	4.37	5.19	5.53	7.14
	6H	8.34	8.63	9.52	9.83	11.44	4.53	4.82	5.72	6.02	7.64
	8H	8.55	8.80	9.75	9.98	11.62	4.72	4.97	5.91	6.15	7.79
	12H	8.68	8.91	9.88	10.08	11.75	4.83	5.06	6.03	6.23	7.90
12H	4H	7.72	8.04	8.91	9.21	10.83	4.01	4.33	5.20	5.50	7.13
	6H	8.31	8.56	9.50	9.74	11.38	4.58	4.83	5.77	6.01	7.65
	8H	8.53	8.75	9.72	9.92	11.59	4.78	5.00	5.98	6.18	7.85