

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904632

Luminaire Tested: DFN2DIP-TR4F0-060D080US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904632
REPORT IS A COMBINATION OF REPORTS P900446 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-060D080US830-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11480.2 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 112.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904632

CATALOG NUMBER: DFN2DIP-TR4F0-060D080US830-RLLFLL

Luminous Intensity Polar Plot

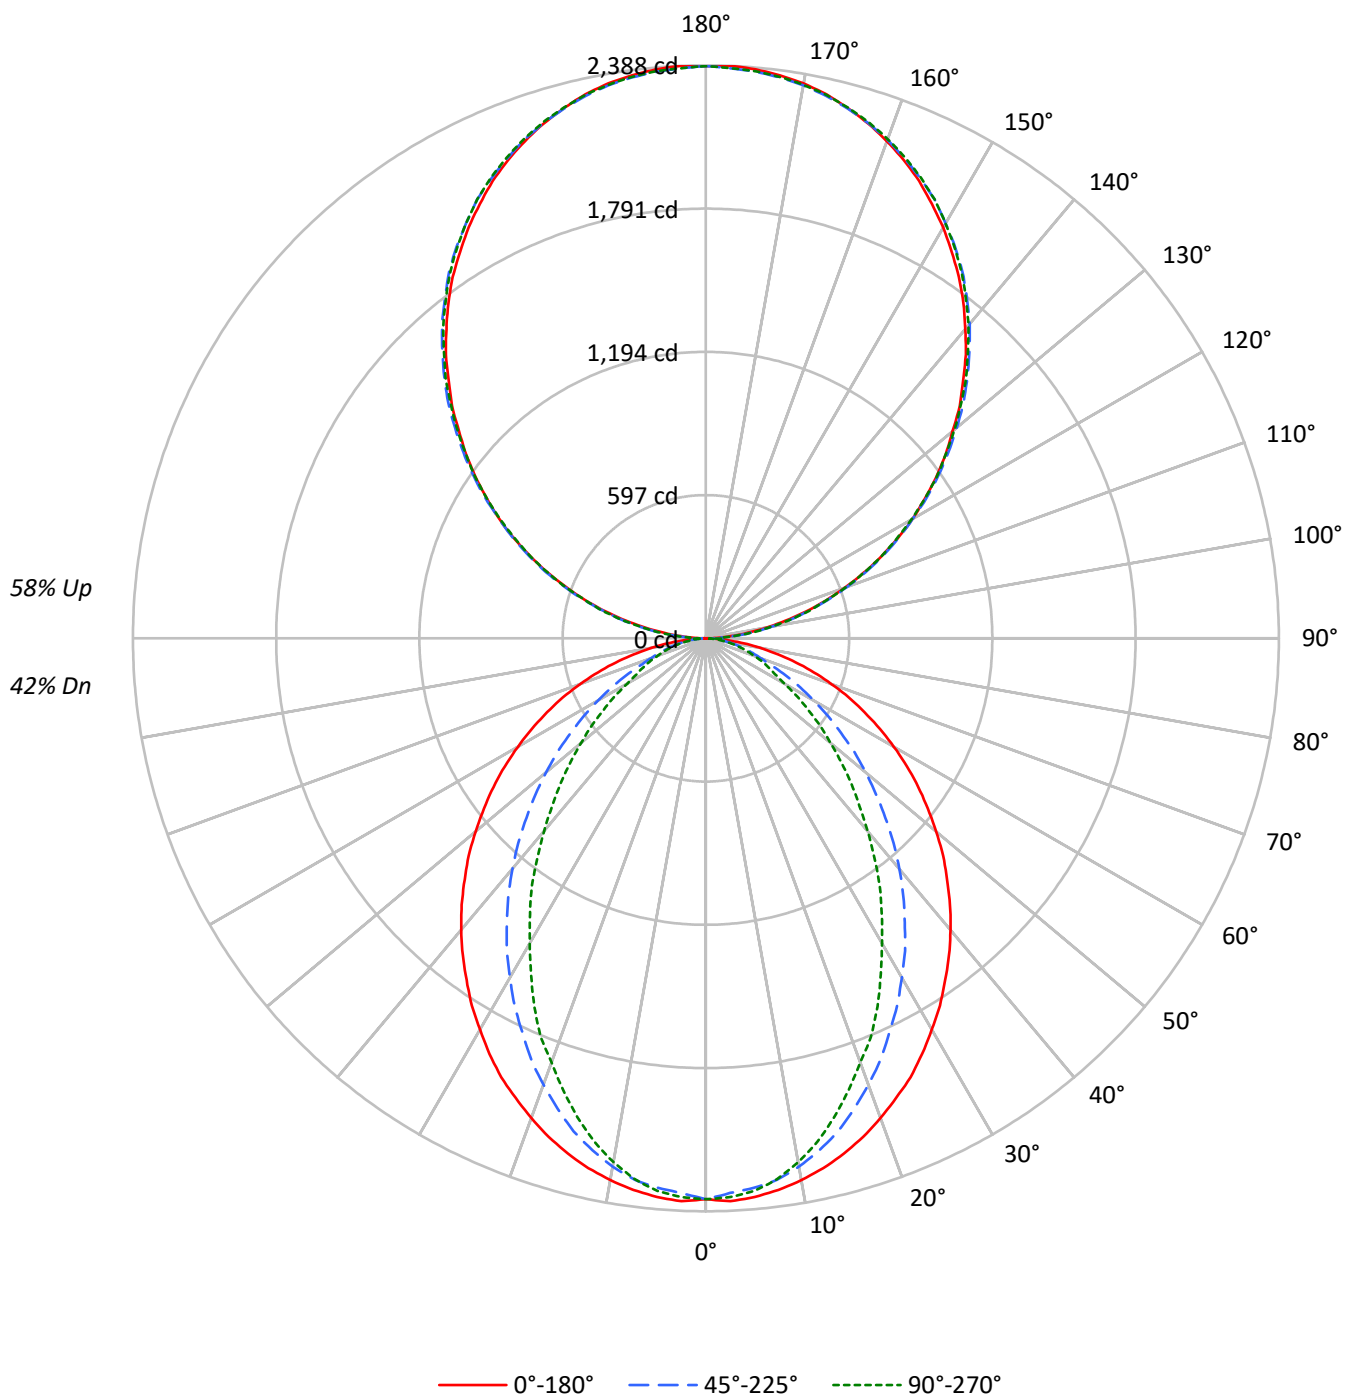

TEST NUMBER: P904632

CATALOG NUMBER: DFN2DIP-TR4F0-060D080US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49
1	96	92	89	85	88	84	81	78	70	67	65	56	55	53	44	43	42
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36
3	81	72	65	59	73	66	60	55	55	50	47	44	41	39	35	33	31
4	74	64	56	50	67	58	52	47	49	44	40	40	36	33	31	29	27
5	68	57	49	43	62	52	45	40	44	39	35	36	32	29	28	26	24
6	63	51	43	38	57	47	40	35	40	34	30	33	29	26	26	23	21
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	34	29	49	39	32	28	33	28	24	27	23	21	22	19	17
9	50	38	31	26	46	36	29	25	30	25	22	25	21	19	20	18	16
10	47	35	28	24	43	33	26	22	28	23	19	23	19	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1857	1857	1857
5°	1860	1827	1839
10°	1841	1792	1779
15°	1816	1732	1687
20°	1783	1651	1573
25°	1748	1559	1463
30°	1702	1465	1324
35°	1657	1364	1202
40°	1611	1260	1062
45°	1558	1144	935
50°	1502	1027	811
55°	1445	902	692
60°	1378	772	569
65°	1301	639	512
70°	1208	515	464
75°	1092	454	422
80°	922	381	365
85°	643	254	275

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1859 cd/sqm

TEST NUMBER: P904632

CATALOG NUMBER: DFN2DIP-TR4F0-060D080US830-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.1	1.9
10°-20°	601.3	5.2
20°-30°	844.3	7.4
30°-40°	920.3	8.0
40°-50°	845.9	7.4
50°-60°	664.3	5.8
60°-70°	432.4	3.8
70°-80°	222.6	1.9
80°-90°	63.6	0.6
90°-100°	147.6	1.3
100°-110°	468.9	4.1
110°-120°	802.4	7.0
120°-130°	1055.3	9.2
130°-140°	1184.5	10.3
140°-150°	1161.5	10.1
150°-160°	974.4	8.5
160°-170°	646.2	5.6
170°-180°	225.9	2.0
0°-30°	1664.7	14.5
0°-40°	2585.0	22.5
0°-60°	4095.1	35.7
0°-90°	4813.7	41.9
90°-120°	1418.8	12.4
90°-150°	4820.1	42.0
90°-180°	6666.0	58.1
0°-180°	11480.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2337	2337	2337	2337	2337	
5°	2337	2327	2299	2318	2312	222
15°	2223	2200	2128	2088	2067	626
25°	2018	1950	1811	1724	1692	928
35°	1739	1631	1445	1312	1265	1088
45°	1421	1280	1058	907	857	1098
55°	1081	916	687	561	520	966
65°	730	558	368	296	290	724
75°	389	241	169	154	152	412
85°	91	46	40	40	40	104
90°	2	26	70	66	68	11
95°	105	125	129	129	125	117
105°	433	439	443	446	446	457
115°	805	817	813	811	805	796
125°	1171	1189	1183	1177	1175	1047
135°	1515	1537	1541	1539	1534	1171
145°	1839	1853	1865	1867	1859	1149
155°	2103	2109	2115	2125	2119	968
165°	2288	2286	2286	2300	2290	645
175°	2380	2375	2370	2385	2372	226
180°	2385	2385	2385	2385	2385	

TEST NUMBER: P904632

CATALOG NUMBER: DFN2DIP-TR4F0-060D080US830-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2337.3	2337.3	2337.3	2337.3	2337.3
2.5°	2347.9	2337.3	2313.9	2335.2	2331.0
5°	2337.3	2326.8	2299.1	2318.3	2312.0
7.5°	2318.3	2305.6	2276.1	2284.3	2273.8
10°	2292.8	2278.0	2235.9	2229.4	2216.8
12.5°	2261.3	2242.1	2184.9	2172.4	2149.0
15°	2223.1	2199.7	2127.9	2087.7	2066.6
17.5°	2178.7	2144.8	2055.9	2009.4	1975.6
20°	2127.9	2085.5	1979.8	1927.0	1880.4
22.5°	2072.9	2024.2	1901.5	1829.7	1798.0
25°	2018.0	1950.2	1810.6	1724.0	1692.1
27.5°	1952.5	1880.4	1726.0	1626.5	1577.9
30°	1882.6	1802.0	1632.9	1525.1	1467.9
32.5°	1814.9	1717.5	1544.3	1417.2	1364.2
35°	1738.8	1630.9	1444.8	1311.5	1264.8
37.5°	1664.7	1548.2	1351.7	1205.6	1152.8
40°	1586.4	1459.6	1254.2	1104.1	1049.1
42.5°	1506.1	1370.7	1157.1	1000.4	947.7
45°	1421.4	1279.6	1057.7	907.3	856.6
47.5°	1341.1	1191.0	962.5	812.2	765.7
50°	1252.3	1102.1	869.4	723.3	679.1
52.5°	1165.4	1006.7	780.5	640.9	600.8
55°	1080.8	915.9	687.4	560.6	520.4
57.5°	994.2	824.9	605.0	486.5	452.6
60°	905.3	736.1	518.2	410.5	376.5
62.5°	818.7	649.5	444.1	342.7	325.8
65°	729.8	558.4	368.1	296.2	289.7
67.5°	645.2	473.7	296.2	260.1	253.8
70°	556.3	391.3	245.2	224.2	215.7
72.5°	471.7	315.1	205.1	188.3	184.0
75°	389.2	241.0	169.2	154.4	152.4
77.5°	306.8	171.3	133.3	124.8	120.6
80°	230.5	122.7	101.4	93.1	93.1
82.5°	160.7	82.6	69.7	65.5	65.5
85°	90.9	46.5	40.2	40.2	40.2
87.5°	33.9	16.9	16.9	14.8	14.8
90°	2.2	25.9	70.5	66.2	68.3
92.5°	44.6	60.4	62.6	64.7	64.7
95°	105.0	125.1	128.7	128.7	125.1
97.5°	174.7	193.4	201.3	201.3	201.3
100°	255.2	271.7	277.5	277.5	275.3
102.5°	340.1	352.3	360.1	362.3	360.1
105°	432.8	438.6	442.9	446.5	446.5
107.5°	524.8	533.5	533.5	534.9	524.8
110°	614.0	625.5	625.5	625.5	619.7

TEST NUMBER: P904632

CATALOG NUMBER: DFN2DIP-TR4F0-060D080US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	710.3	722.6	720.4	714.6	710.3
115°	805.2	816.7	813.1	811.0	805.2
117.5°	899.4	915.2	905.1	899.4	893.6
120°	994.3	1010.1	994.3	994.3	987.8
122.5°	1080.5	1100.7	1090.6	1084.9	1080.5
125°	1171.1	1189.1	1183.4	1176.9	1174.8
127.5°	1259.6	1281.9	1273.9	1265.4	1259.6
130°	1342.3	1368.1	1364.5	1360.3	1352.4
132.5°	1435.0	1455.1	1456.6	1446.5	1440.8
135°	1514.8	1537.1	1541.4	1539.3	1533.5
137.5°	1603.9	1621.9	1625.5	1624.1	1615.4
140°	1682.3	1700.3	1710.3	1710.3	1702.4
142.5°	1762.8	1780.8	1786.6	1788.8	1780.8
145°	1839.1	1853.4	1864.9	1867.1	1859.2
147.5°	1907.3	1925.3	1933.9	1937.6	1929.7
150°	1977.8	1990.0	1997.9	2004.4	1997.9
152.5°	2040.3	2052.6	2062.7	2070.6	2062.7
155°	2102.9	2108.7	2115.2	2125.2	2118.7
157.5°	2156.8	2161.2	2164.7	2179.1	2169.1
160°	2205.0	2209.3	2211.5	2223.6	2215.1
162.5°	2249.6	2249.6	2251.7	2265.4	2255.3
165°	2287.6	2285.5	2285.5	2299.9	2289.8
167.5°	2322.1	2315.7	2315.7	2330.1	2320.0
170°	2348.1	2342.3	2340.1	2354.6	2342.3
172.5°	2366.1	2360.3	2358.1	2372.5	2360.3
175°	2380.4	2374.6	2370.3	2384.7	2372.5
177.5°	2388.3	2382.6	2378.2	2390.5	2378.2
180°	2384.7	2384.7	2384.7	2384.7	2384.7

TEST NUMBER: P904632

CATALOG NUMBER: DFN2DIP-TR4F0-060D080US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.49	9.26	9.52	10.29	11.67	4.46	5.23	5.49	6.26	7.65
	3H	10.16	10.85	11.20	11.89	13.29	5.65	6.33	6.68	7.37	8.78
	4H	10.76	11.42	11.82	12.46	13.87	6.09	6.74	7.15	7.79	9.20
	6H	11.18	11.78	12.24	12.83	14.25	6.41	7.01	7.47	8.06	9.48
	8H	11.31	11.88	12.37	12.94	14.36	6.50	7.07	7.57	8.13	9.55
	12H	11.37	11.91	12.44	12.97	14.41	6.54	7.08	7.61	8.14	9.58
4H	2H	8.50	9.15	9.56	10.19	11.60	5.05	5.70	6.11	6.74	8.15
	3H	10.32	10.86	11.39	11.93	13.36	6.39	6.93	7.46	8.01	9.43
	4H	11.01	11.51	12.08	12.57	14.02	6.94	7.44	8.01	8.50	9.94
	6H	11.52	11.95	12.60	13.03	14.47	7.36	7.78	8.44	8.87	10.31
	8H	11.70	12.09	12.78	13.17	14.63	7.49	7.88	8.57	8.96	10.42
	12H	11.79	12.15	12.89	13.24	14.70	7.55	7.91	8.65	9.00	10.46
8H	4H	10.97	11.37	12.05	12.45	13.90	7.22	7.61	8.30	8.69	10.15
	6H	11.54	11.87	12.64	12.99	14.44	7.73	8.06	8.84	9.18	10.63
	8H	11.75	12.04	12.86	13.14	14.62	7.92	8.21	9.03	9.31	10.79
	12H	11.89	12.14	13.00	13.24	14.75	8.04	8.29	9.15	9.39	10.90
12H	4H	10.92	11.28	12.02	12.37	13.83	7.22	7.58	8.32	8.67	10.13
	6H	11.51	11.80	12.62	12.90	14.38	7.78	8.07	8.89	9.17	10.64
	8H	11.73	11.98	12.84	13.08	14.59	7.99	8.24	9.10	9.34	10.85

END OF REPORT

FIELD PERFORMANCE MAY DIFFER FROM LABORATORY PERFORMANCE

8 of 8