

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904637

Luminaire Tested: DFN2DIP-TR4F0-060D090US830-RLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P904637  
REPORT IS A COMBINATION OF REPORTS P901984 AND P898849  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-060D090US830-RLLONL  
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 13205.0 lumens  
Efficiency: N/A  
Efficacy: 109.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 121  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9781  
Total Harmonic Distortion (THDi): 0.075  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P904637  
CATALOG NUMBER: DFN2DIP-TR4F0-060D090US830-RLLONL

### Luminous Intensity Polar Plot

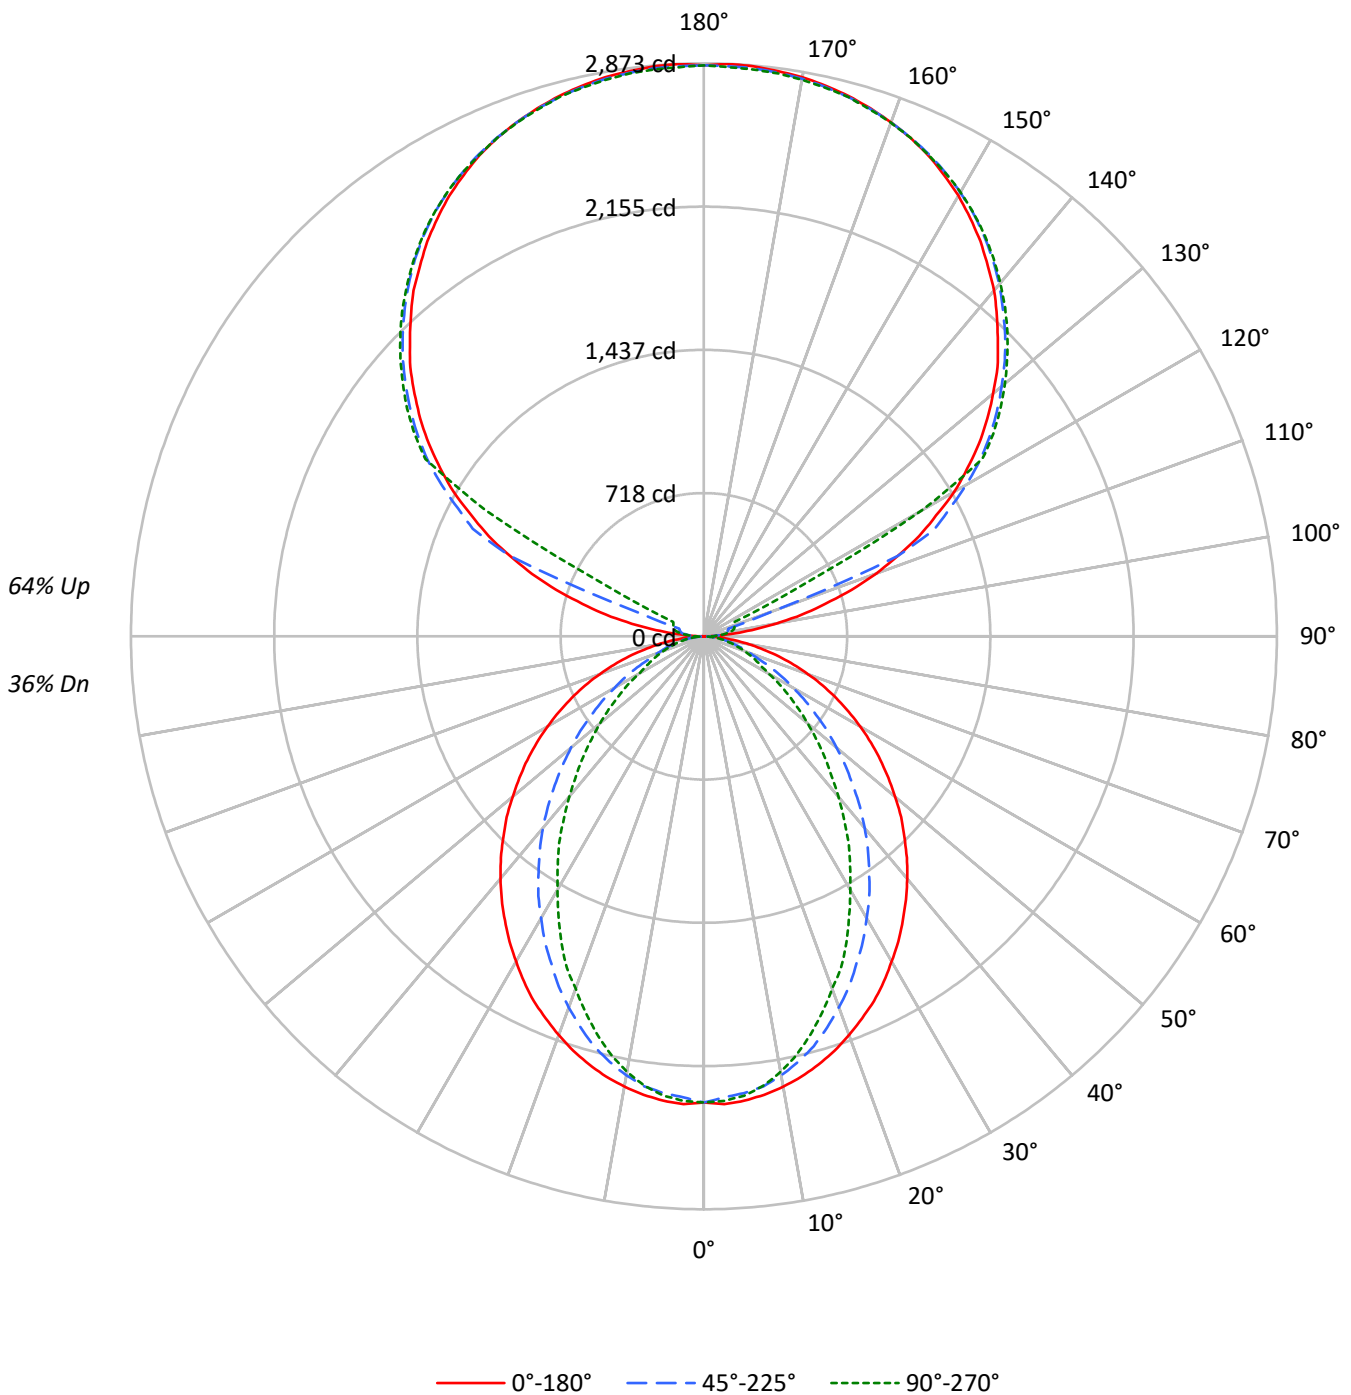



TEST NUMBER: P904637

CATALOG NUMBER: DFN2DIP-TR4F0-060D090US830-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	36				36
1	95	91	87	84	86	83	80	77	67	65	63	52	51	50	39	38	38	31				31
2	87	80	74	69	78	73	68	63	59	56	53	46	44	42	35	33	32	27				27
3	79	70	63	58	72	64	58	53	52	48	45	41	38	36	31	29	28	23				23
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24	20				20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	25	23	21	18				18
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19	16				16
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17	14				14
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15	13				13
9	49	37	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14	12				12
10	46	34	27	23	42	32	25	21	26	22	18	22	18	15	17	14	13	11				11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1857	1857	1857
5°	1860	1827	1839
10°	1841	1792	1779
15°	1816	1732	1687
20°	1783	1651	1573
25°	1748	1559	1463
30°	1702	1465	1324
35°	1657	1364	1202
40°	1611	1260	1062
45°	1558	1144	935
50°	1502	1027	811
55°	1445	902	692
60°	1378	772	569
65°	1301	639	512
70°	1208	515	464
75°	1092	454	422
80°	922	381	365
85°	643	254	275

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1558 cd/sqm



TEST NUMBER: P904637

CATALOG NUMBER: DFN2DIP-TR4F0-060D090US830-RLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	219.1	1.7
10°-20°	601.3	4.6
20°-30°	844.3	6.4
30°-40°	920.3	7.0
40°-50°	845.9	6.4
50°-60°	664.3	5.0
60°-70°	432.4	3.3
70°-80°	222.6	1.7
80°-90°	61.9	0.5
90°-100°	94.4	0.7
100°-110°	351.9	2.7
110°-120°	933.3	7.1
120°-130°	1548.0	11.7
130°-140°	1644.3	12.5
140°-150°	1528.2	11.6
150°-160°	1228.6	9.3
160°-170°	791.7	6.0
170°-180°	272.5	2.1
0°-30°	1664.7	12.6
0°-40°	2585.0	19.6
0°-60°	4095.1	31.0
0°-90°	4812.0	36.4
90°-120°	1379.6	10.4
90°-150°	6100.2	46.2
90°-180°	8393.0	63.6
0°-180°	13205.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2337	2337	2337	2337	2337	
5°	2337	2327	2299	2318	2312	222
15°	2223	2200	2128	2088	2067	626
25°	2018	1950	1811	1724	1692	928
35°	1739	1631	1445	1312	1265	1088
45°	1421	1280	1058	907	857	1098
55°	1081	916	687	561	520	966
65°	730	558	368	296	290	724
75°	389	241	169	154	152	412
85°	91	46	40	40	40	104
90°	2	25	41	52	56	12
95°	135	66	81	91	89	159
105°	630	692	126	149	157	673
115°	1191	1226	1278	319	170	1173
125°	1684	1711	1750	1765	1771	1502
135°	2084	2117	2136	2157	2152	1610
145°	2418	2415	2451	2465	2455	1512
155°	2662	2644	2668	2681	2664	1227
165°	2805	2792	2799	2813	2799	792
175°	2869	2854	2859	2873	2852	273
180°	2863	2863	2863	2863	2863	



TEST NUMBER: P904637

CATALOG NUMBER: DFN2DIP-TR4F0-060D090US830-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2337.3	2337.3	2337.3	2337.3	2337.3
2.5°	2347.9	2337.3	2313.9	2335.2	2331.0
5°	2337.3	2326.8	2299.1	2318.3	2312.0
7.5°	2318.3	2305.6	2276.1	2284.3	2273.8
10°	2292.8	2278.0	2235.9	2229.4	2216.8
12.5°	2261.3	2242.1	2184.9	2172.4	2149.0
15°	2223.1	2199.7	2127.9	2087.7	2066.6
17.5°	2178.7	2144.8	2055.9	2009.4	1975.6
20°	2127.9	2085.5	1979.8	1927.0	1880.4
22.5°	2072.9	2024.2	1901.5	1829.7	1798.0
25°	2018.0	1950.2	1810.6	1724.0	1692.1
27.5°	1952.5	1880.4	1726.0	1626.5	1577.9
30°	1882.6	1802.0	1632.9	1525.1	1467.9
32.5°	1814.9	1717.5	1544.3	1417.2	1364.2
35°	1738.8	1630.9	1444.8	1311.5	1264.8
37.5°	1664.7	1548.2	1351.7	1205.6	1152.8
40°	1586.4	1459.6	1254.2	1104.1	1049.1
42.5°	1506.1	1370.7	1157.1	1000.4	947.7
45°	1421.4	1279.6	1057.7	907.3	856.6
47.5°	1341.1	1191.0	962.5	812.2	765.7
50°	1252.3	1102.1	869.4	723.3	679.1
52.5°	1165.4	1006.7	780.5	640.9	600.8
55°	1080.8	915.9	687.4	560.6	520.4
57.5°	994.2	824.9	605.0	486.5	452.6
60°	905.3	736.1	518.2	410.5	376.5
62.5°	818.7	649.5	444.1	342.7	325.8
65°	729.8	558.4	368.1	296.2	289.7
67.5°	645.2	473.7	296.2	260.1	253.8
70°	556.3	391.3	245.2	224.2	215.7
72.5°	471.7	315.1	205.1	188.3	184.0
75°	389.2	241.0	169.2	154.4	152.4
77.5°	306.8	171.3	133.3	124.8	120.6
80°	230.5	122.7	101.4	93.1	93.1
82.5°	160.7	82.6	69.7	65.5	65.5
85°	90.9	46.5	40.2	40.2	40.2
87.5°	33.9	16.9	16.9	14.8	14.8
90°	2.0	24.9	41.3	51.9	55.8
92.5°	51.9	43.5	49.7	53.9	55.8
95°	134.6	66.2	80.7	91.2	89.1
97.5°	242.3	72.6	105.6	111.9	113.9
100°	366.7	82.9	118.1	134.6	138.7
102.5°	503.3	499.4	122.2	144.9	151.3
105°	629.7	692.0	126.4	149.1	157.4
107.5°	776.8	828.5	130.6	153.3	161.6
110°	917.8	961.1	362.6	155.4	163.6



TEST NUMBER: P904637

CATALOG NUMBER: DFN2DIP-TR4F0-060D090US830-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1050.4	1087.5	1052.3	159.4	165.8
115°	1191.1	1226.2	1278.2	319.1	169.9
117.5°	1313.3	1354.7	1390.1	1093.7	551.0
120°	1450.1	1481.1	1518.5	1543.3	1263.7
122.5°	1566.0	1599.2	1640.8	1653.0	1655.3
125°	1684.0	1711.1	1750.5	1765.0	1771.1
127.5°	1791.8	1820.8	1852.1	1872.7	1874.7
130°	1893.4	1926.7	1949.3	1972.1	1970.2
132.5°	1997.0	2024.0	2046.6	2065.4	2063.4
135°	2084.1	2117.2	2135.7	2156.6	2152.5
137.5°	2175.1	2199.9	2220.8	2241.5	2235.3
140°	2264.1	2280.9	2303.5	2322.1	2311.9
142.5°	2338.9	2353.4	2380.2	2396.7	2386.4
145°	2417.6	2415.4	2450.6	2465.1	2454.8
147.5°	2485.8	2479.6	2514.8	2525.2	2517.0
150°	2552.2	2537.7	2570.9	2583.1	2572.9
152.5°	2608.0	2591.5	2622.5	2635.1	2620.6
155°	2661.9	2643.5	2668.2	2680.6	2664.1
157.5°	2705.5	2689.0	2707.6	2722.2	2705.5
160°	2742.8	2730.3	2742.8	2755.1	2740.6
162.5°	2775.8	2763.4	2773.8	2788.3	2769.7
165°	2804.8	2792.5	2798.7	2813.2	2798.7
167.5°	2827.7	2815.2	2821.5	2836.0	2817.4
170°	2846.4	2833.8	2838.0	2852.5	2833.8
172.5°	2858.7	2846.4	2850.5	2865.0	2846.4
175°	2869.0	2854.5	2858.7	2873.2	2852.5
177.5°	2873.2	2858.7	2860.9	2875.4	2856.8
180°	2862.9	2862.9	2862.9	2862.9	2862.9



TEST NUMBER: P904637  
 CATALOG NUMBER: DFN2DIP-TR4F0-060D090US830-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.88	8.61	8.95	9.68	11.13	3.85	4.58	4.92	5.65	7.10
	3H	9.55	10.20	10.63	11.28	12.75	5.03	5.69	6.11	6.76	8.24
	4H	10.15	10.77	11.24	11.85	13.33	5.48	6.10	6.57	7.18	8.66
	6H	10.57	11.14	11.67	12.22	13.71	5.80	6.37	6.90	7.45	8.94
	8H	10.69	11.23	11.79	12.33	13.81	5.88	6.43	6.99	7.52	9.01
	12H	10.75	11.26	11.86	12.35	13.86	5.92	6.44	7.03	7.53	9.04
4H	2H	7.88	8.50	8.98	9.58	11.06	4.43	5.05	5.53	6.13	7.61
	3H	9.70	10.22	10.81	11.32	12.82	5.78	6.29	6.88	7.40	8.89
	4H	10.39	10.86	11.50	11.96	13.47	6.32	6.79	7.43	7.89	9.40
	6H	10.90	11.31	12.02	12.42	13.93	6.74	7.14	7.85	8.26	9.76
	8H	11.07	11.45	12.19	12.56	14.08	6.86	7.24	7.98	8.35	9.87
	12H	11.16	11.51	12.30	12.63	14.16	6.92	7.27	8.06	8.39	9.92
8H	4H	10.35	10.73	11.47	11.84	13.36	6.59	6.97	7.71	8.08	9.60
	6H	10.91	11.23	12.05	12.38	13.90	7.11	7.42	8.25	8.57	10.09
	8H	11.13	11.40	12.27	12.54	14.07	7.30	7.57	8.44	8.71	10.24
	12H	11.26	11.50	12.41	12.63	14.21	7.42	7.66	8.56	8.79	10.36
12H	4H	10.30	10.64	11.43	11.76	13.29	6.59	6.93	7.73	8.06	9.58
	6H	10.89	11.16	12.03	12.30	13.83	7.16	7.43	8.30	8.56	10.10
	8H	11.11	11.34	12.25	12.47	14.05	7.36	7.60	8.51	8.73	10.31