

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904748

Luminaire Tested: DFN2DIP-TR4F0-090D100US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904748
REPORT IS A COMBINATION OF REPORTS P900488 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-090D100US830-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15552.0 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 163.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904748

CATALOG NUMBER: DFN2DIP-TR4F0-090D100US830-RLLFLL

Luminous Intensity Polar Plot

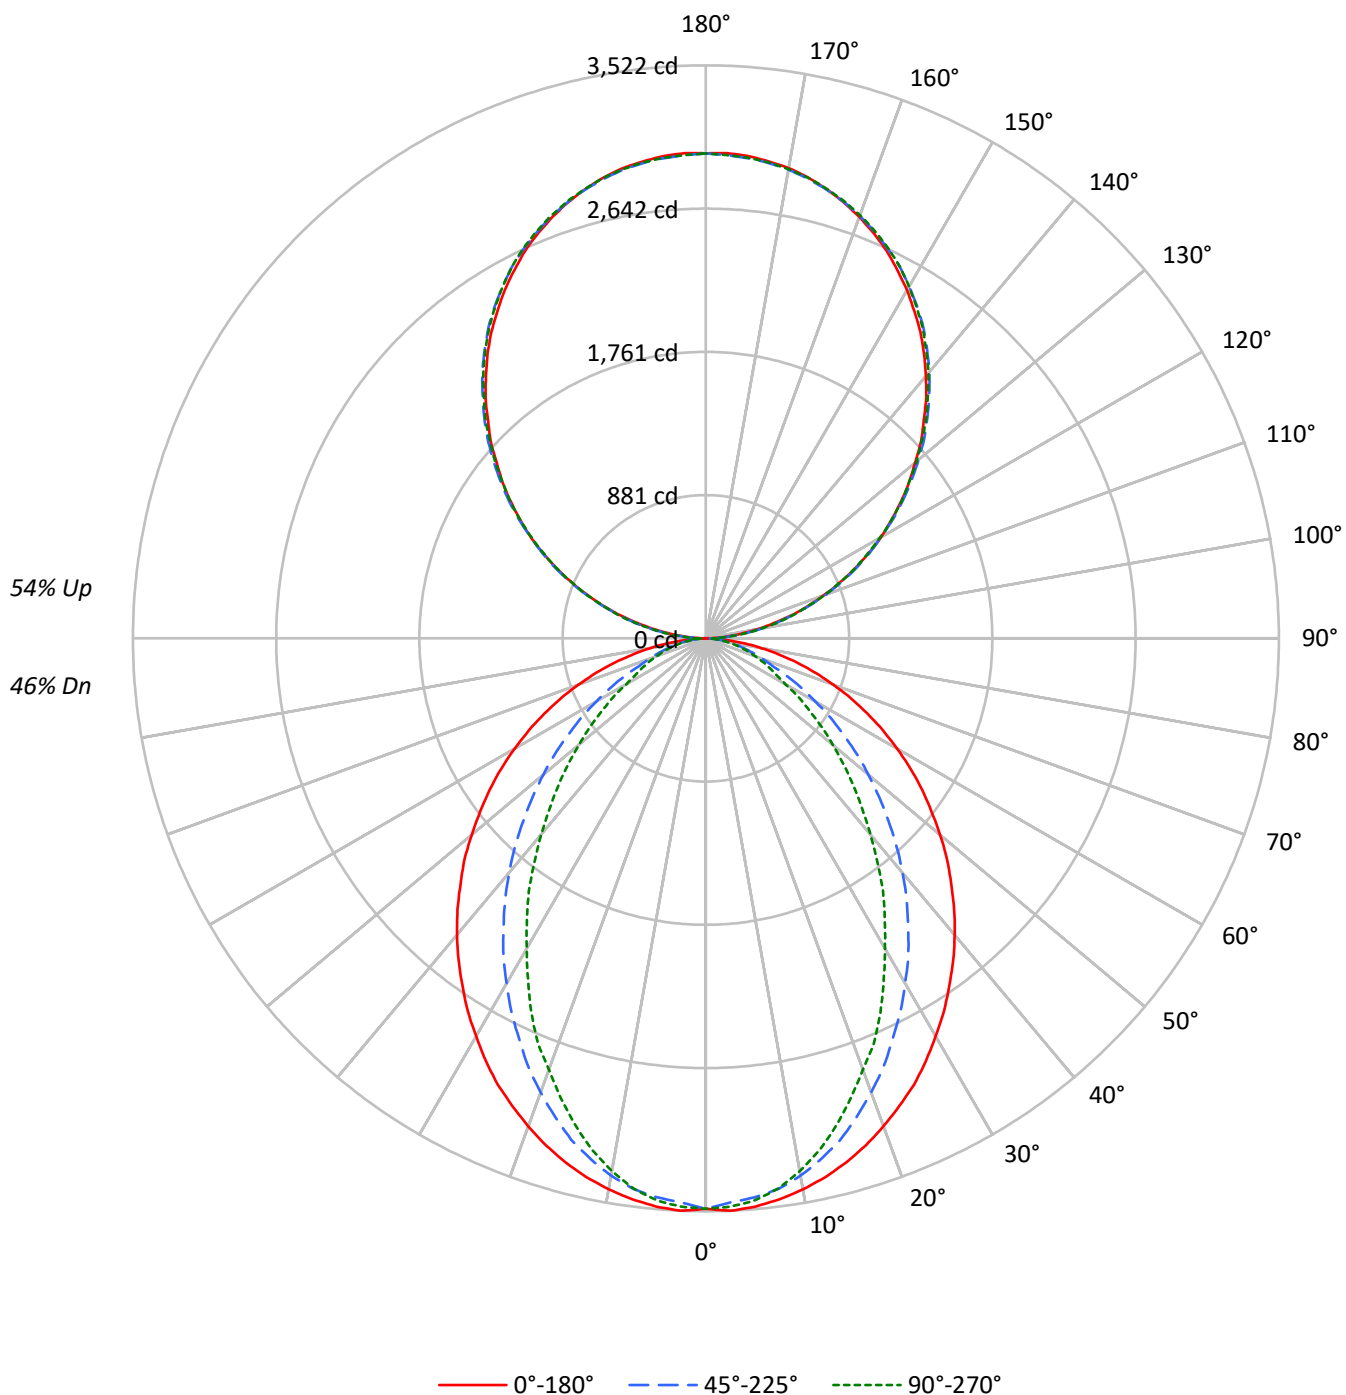

TEST NUMBER: P904748

CATALOG NUMBER: DFN2DIP-TR4F0-090D100US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	71	66	64	60	57	52	50	48	42	41	39
3	82	72	65	60	75	67	61	56	56	52	48	47	44	41	38	36	34
4	75	64	57	51	69	60	53	48	50	45	41	42	38	35	34	32	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	23	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2785	2785	2785
5°	2790	2741	2758
10°	2762	2687	2669
15°	2724	2598	2530
20°	2674	2476	2360
25°	2622	2339	2195
30°	2553	2198	1986
35°	2485	2047	1803
40°	2417	1890	1593
45°	2336	1716	1403
50°	2254	1541	1217
55°	2167	1354	1038
60°	2067	1158	854
65°	1952	958	769
70°	1812	773	696
75°	1637	681	633
80°	1383	571	548
85°	964	381	411

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2336 cd/sqm

TEST NUMBER: P904748

CATALOG NUMBER: DFN2DIP-TR4F0-090D100US830-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	328.6	2.1
10°-20°	902.0	5.8
20°-30°	1266.4	8.1
30°-40°	1380.5	8.9
40°-50°	1268.8	8.2
50°-60°	996.5	6.4
60°-70°	648.6	4.2
70°-80°	333.9	2.1
80°-90°	93.7	0.6
90°-100°	184.5	1.2
100°-110°	586.1	3.8
110°-120°	1003.0	6.4
120°-130°	1319.1	8.5
130°-140°	1480.6	9.5
140°-150°	1451.9	9.3
150°-160°	1217.9	7.8
160°-170°	807.7	5.2
170°-180°	282.3	1.8
0°-30°	2497.0	16.1
0°-40°	3877.5	24.9
0°-60°	6142.8	39.5
0°-90°	7218.9	46.4
90°-120°	1773.5	11.4
90°-150°	6025.1	38.7
90°-180°	8333.0	53.6
0°-180°	15552.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3506	3506	3506	3506	3506	
5°	3506	3490	3449	3477	3468	332
15°	3335	3300	3192	3132	3100	940
25°	3027	2925	2716	2586	2538	1392
35°	2608	2446	2167	1967	1897	1632
45°	2132	1920	1586	1361	1285	1647
55°	1621	1374	1031	841	781	1449
65°	1095	838	552	444	435	1085
75°	584	362	254	232	229	617
85°	136	70	60	60	60	156
90°	3	32	88	83	85	15
95°	131	156	161	161	156	146
105°	541	548	554	558	558	571
115°	1006	1021	1016	1014	1006	996
125°	1464	1486	1479	1471	1468	1308
135°	1894	1921	1927	1924	1917	1464
145°	2299	2317	2331	2334	2324	1436
155°	2629	2636	2644	2656	2648	1210
165°	2860	2857	2857	2875	2862	807
175°	2976	2968	2963	2981	2966	283
180°	2981	2981	2981	2981	2981	

TEST NUMBER: P904748

CATALOG NUMBER: DFN2DIP-TR4F0-090D100US830-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3506.0	3506.0	3506.0	3506.0	3506.0
2.5°	3521.8	3506.0	3470.9	3503.0	3496.5
5°	3506.0	3490.1	3448.8	3477.3	3467.9
7.5°	3477.3	3458.5	3414.1	3426.5	3410.7
10°	3439.3	3417.1	3353.8	3344.0	3325.2
12.5°	3391.8	3363.3	3277.4	3258.6	3223.5
15°	3334.6	3299.7	3191.9	3131.6	3100.0
17.5°	3268.0	3217.2	3083.8	3014.2	2963.4
20°	3191.9	3128.3	2969.7	2890.6	2820.6
22.5°	3109.4	3036.4	2852.2	2744.5	2697.1
25°	3027.0	2925.3	2715.9	2586.0	2538.2
27.5°	2928.7	2820.6	2589.0	2439.9	2366.8
30°	2824.0	2703.1	2449.3	2287.7	2201.9
32.5°	2722.3	2576.2	2316.3	2125.8	2046.4
35°	2608.2	2446.3	2167.2	1967.3	1897.2
37.5°	2497.1	2322.4	2027.5	1808.4	1729.3
40°	2379.6	2189.4	1881.4	1656.2	1573.8
42.5°	2259.1	2056.2	1735.6	1500.7	1421.5
45°	2132.2	1919.5	1586.5	1360.9	1284.9
47.5°	2011.7	1786.5	1443.8	1218.2	1148.6
50°	1878.4	1653.1	1304.1	1085.0	1018.6
52.5°	1748.1	1510.1	1170.8	961.4	901.2
55°	1621.2	1373.8	1031.0	840.9	780.6
57.5°	1491.3	1237.5	907.6	729.8	679.0
60°	1357.9	1104.1	777.3	615.7	564.9
62.5°	1228.0	974.2	666.2	514.1	488.8
65°	1094.7	837.5	552.0	444.3	434.6
67.5°	967.8	710.6	444.3	390.1	380.7
70°	834.5	587.1	368.0	336.3	323.5
72.5°	707.6	472.6	307.6	282.4	276.1
75°	583.7	361.6	253.8	231.6	228.6
77.5°	460.1	256.8	199.9	187.2	180.8
80°	345.7	184.2	152.1	139.7	139.7
82.5°	241.0	123.9	104.7	98.3	98.3
85°	136.3	69.7	60.2	60.2	60.2
87.5°	50.8	25.3	25.3	22.2	22.2
90°	2.7	32.3	88.0	82.7	85.4
92.5°	55.7	75.5	78.2	80.9	80.9
95°	131.2	156.4	160.9	160.9	156.4
97.5°	218.4	241.8	251.7	251.7	251.7
100°	319.1	339.7	346.9	346.9	344.2
102.5°	425.1	440.4	450.3	452.9	450.3
105°	541.0	548.2	553.6	558.1	558.1
107.5°	656.0	666.8	666.8	668.6	656.0
110°	767.5	781.8	781.8	781.8	774.7



TEST NUMBER: P904748

CATALOG NUMBER: DFN2DIP-TR4F0-090D100US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	887.9	903.1	900.5	893.2	887.9
115°	1006.5	1020.9	1016.4	1013.7	1006.5
117.5°	1124.3	1144.1	1131.4	1124.3	1117.0
120°	1242.8	1262.6	1242.8	1242.8	1234.8
122.5°	1350.7	1375.8	1363.3	1356.1	1350.7
125°	1464.0	1486.4	1479.2	1471.1	1468.5
127.5°	1574.5	1602.3	1592.4	1581.7	1574.5
130°	1677.8	1710.1	1705.7	1700.3	1690.4
132.5°	1793.8	1818.9	1820.7	1808.2	1800.9
135°	1893.5	1921.4	1926.7	1924.1	1916.8
137.5°	2005.0	2027.4	2031.9	2030.1	2019.3
140°	2102.9	2125.3	2138.0	2138.0	2128.1
142.5°	2203.6	2226.0	2233.2	2235.9	2226.0
145°	2298.8	2316.8	2331.2	2333.8	2323.9
147.5°	2384.2	2406.7	2417.4	2422.0	2412.1
150°	2472.3	2487.6	2497.5	2505.5	2497.5
152.5°	2550.4	2565.7	2578.3	2588.2	2578.3
155°	2628.7	2635.8	2643.9	2656.5	2648.4
157.5°	2696.0	2701.4	2705.9	2723.9	2711.3
160°	2756.3	2761.6	2764.3	2779.6	2768.8
162.5°	2812.0	2812.0	2814.6	2831.7	2819.1
165°	2859.6	2856.8	2856.8	2874.8	2862.3
167.5°	2902.7	2894.6	2894.6	2912.6	2900.0
170°	2935.1	2927.9	2925.2	2943.2	2927.9
172.5°	2957.5	2950.3	2947.6	2965.6	2950.3
175°	2975.5	2968.3	2963.0	2980.9	2965.6
177.5°	2985.4	2978.2	2972.8	2988.0	2972.8
180°	2980.9	2980.9	2980.9	2980.9	2980.9

TEST NUMBER: P904748

CATALOG NUMBER: DFN2DIP-TR4F0-090D100US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.35	11.16	11.35	12.16	13.48	6.33	7.13	7.32	8.13	9.46
	3H	12.03	12.75	13.03	13.76	15.10	7.52	8.23	8.52	9.24	10.59
	4H	12.64	13.32	13.65	14.33	15.68	7.97	8.64	8.98	9.66	11.01
	6H	13.06	13.68	14.08	14.70	16.06	8.29	8.91	9.31	9.93	11.29
	8H	13.18	13.78	14.22	14.81	16.17	8.38	8.97	9.41	10.00	11.36
	12H	13.24	13.81	14.28	14.83	16.22	8.42	8.98	9.46	10.01	11.40
4H	2H	10.37	11.05	11.39	12.06	13.41	6.92	7.60	7.94	8.61	9.96
	3H	12.20	12.76	13.23	13.80	15.17	8.27	8.83	9.30	9.87	11.24
	4H	12.89	13.40	13.93	14.44	15.83	8.82	9.33	9.85	10.37	11.75
	6H	13.40	13.84	14.45	14.90	16.29	9.23	9.68	10.28	10.73	12.12
	8H	13.57	13.99	14.62	15.04	16.44	9.36	9.78	10.41	10.83	12.23
	12H	13.67	14.04	14.74	15.11	16.51	9.43	9.80	10.50	10.87	12.27
8H	4H	12.85	13.27	13.90	14.32	15.72	9.09	9.51	10.14	10.56	11.96
	6H	13.42	13.76	14.49	14.85	16.25	9.61	9.95	10.68	11.05	12.44
	8H	13.63	13.93	14.71	15.01	16.43	9.80	10.10	10.88	11.18	12.60
	12H	13.77	14.04	14.85	15.11	16.56	9.92	10.19	11.01	11.26	12.71
12H	4H	12.80	13.18	13.87	14.24	15.65	9.10	9.47	10.16	10.53	11.94
	6H	13.39	13.69	14.47	14.77	16.19	9.66	9.96	10.74	11.04	12.45
	8H	13.61	13.88	14.70	14.95	16.40	9.87	10.14	10.95	11.21	12.66

END OF REPORT