

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904858

Luminaire Tested: DFN2DIP-TR4F0-120D110US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904858
REPORT IS A COMBINATION OF REPORTS P900511 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-120D110US830-FLLFLL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 20373.0 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 210.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904858

CATALOG NUMBER: DFN2DIP-TR4F0-120D110US830-FLLFLL

Luminous Intensity Polar Plot

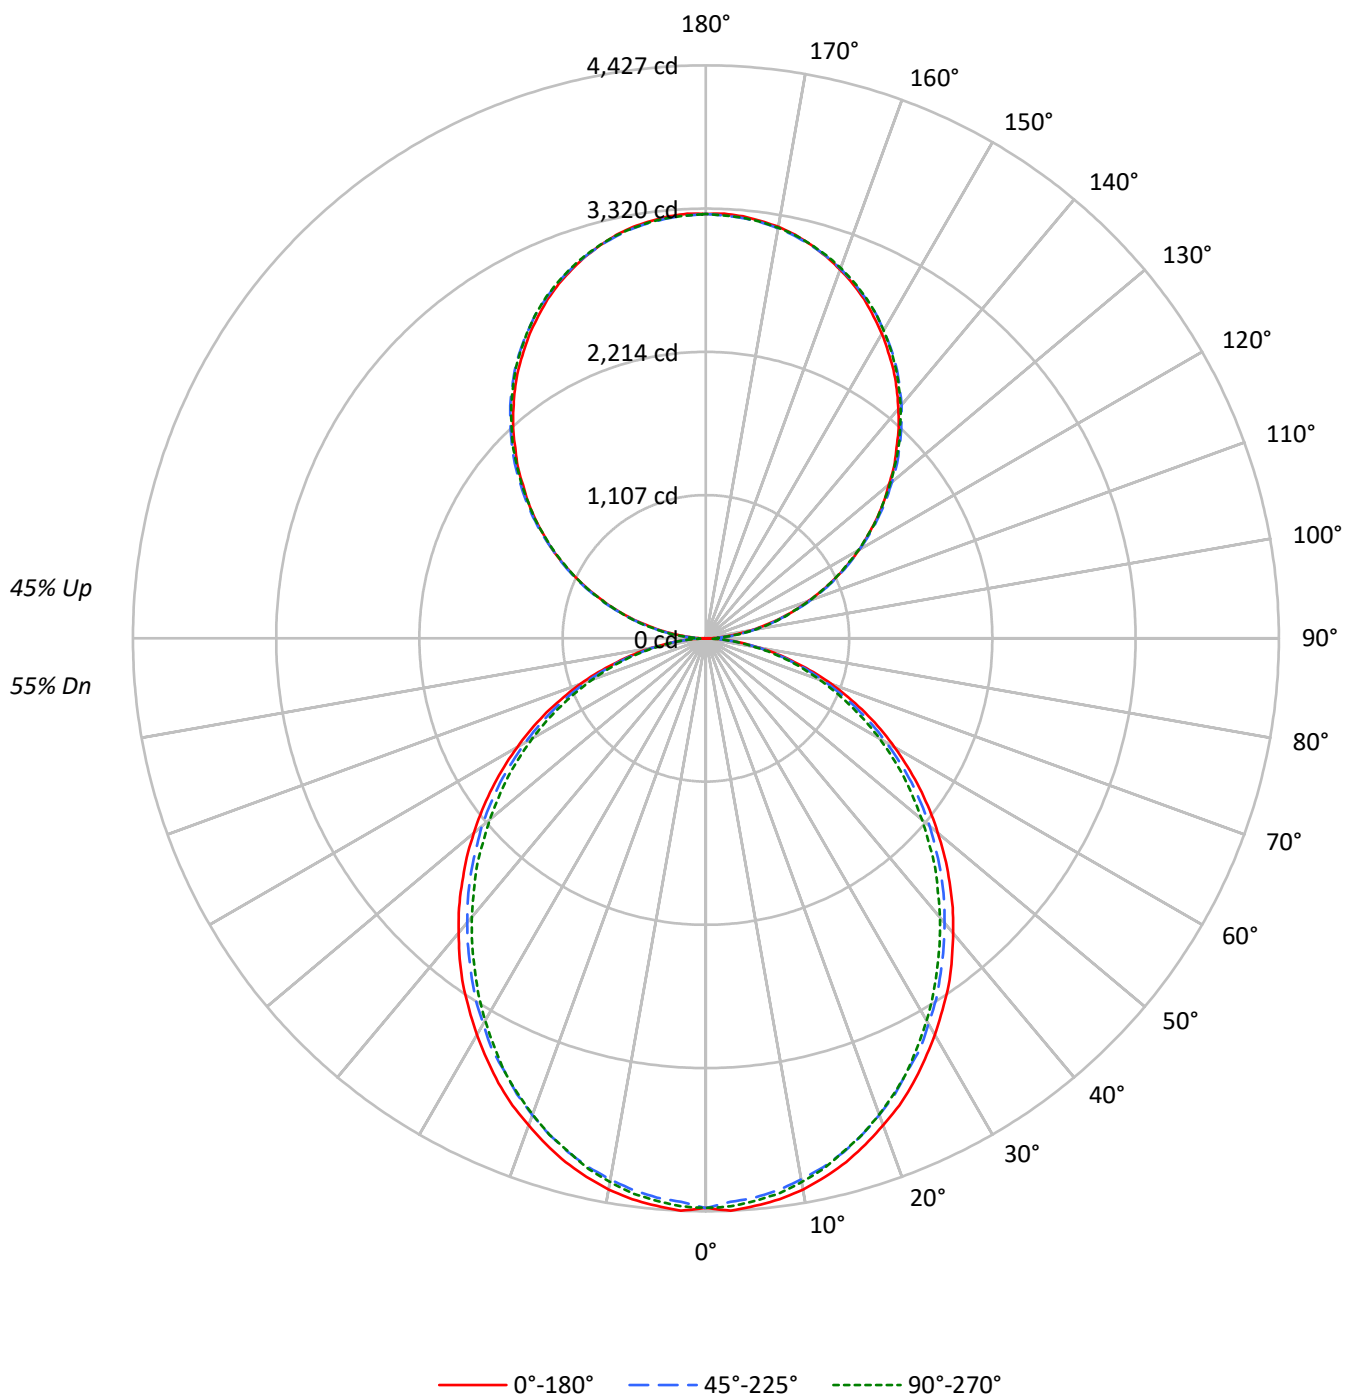

TEST NUMBER: P904858

CATALOG NUMBER: DFN2DIP-TR4F0-120D110US830-FLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	108	108	108	108		101	101	101	101		86	86	86		73	73	73		61	61	61
1	99	95	91	87		92	88	85	81		76	73	71		64	62	61		54	52	51
2	90	83	76	71		83	77	71	67		66	62	59		56	53	51		47	45	43
3	82	73	65	59		76	68	61	56		58	53	49		50	46	43		42	39	37
4	75	64	56	50		70	60	53	47		52	46	42		44	40	37		37	34	32
5	69	57	49	43		64	54	46	41		46	41	36		40	35	32		34	30	28
6	64	51	43	37		59	48	41	35		42	36	32		36	32	28		31	27	24
7	59	46	38	33		55	44	36	31		38	32	28		33	28	25		28	24	22
8	55	42	34	29		51	40	33	28		35	29	25		30	25	22		26	22	19
9	51	39	31	26		47	36	29	25		32	26	22		28	23	20		24	20	18
10	48	35	28	23		44	33	27	22		29	24	20		26	21	18		22	19	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3496	3496	3496
5°	3502	3448	3471
10°	3474	3401	3424
15°	3423	3345	3350
20°	3354	3267	3275
25°	3285	3174	3188
30°	3199	3088	3077
35°	3117	2985	2960
40°	3017	2882	2849
45°	2917	2779	2735
50°	2808	2670	2603
55°	2693	2545	2482
60°	2564	2396	2343
65°	2423	2241	2179
70°	2243	2053	2002
75°	1994	1828	1839
80°	1694	1541	1528
85°	1225	1046	1013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2917 cd/sqm

TEST NUMBER: P904858

CATALOG NUMBER: DFN2DIP-TR4F0-120D110US830-FLLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	414.2	2.0
10°-20°	1165.5	5.7
20°-30°	1712.8	8.4
30°-40°	1989.3	9.8
40°-50°	1986.8	9.8
50°-60°	1732.4	8.5
60°-70°	1280.6	6.3
70°-80°	724.6	3.6
80°-90°	200.6	1.0
90°-100°	202.9	1.0
100°-110°	644.7	3.2
110°-120°	1103.3	5.4
120°-130°	1451.0	7.1
130°-140°	1628.6	8.0
140°-150°	1597.1	7.8
150°-160°	1339.7	6.6
160°-170°	888.5	4.4
170°-180°	310.5	1.5
0°-30°	3292.4	16.2
0°-40°	5281.7	25.9
0°-60°	9000.9	44.2
0°-90°	11206.7	55.0
90°-120°	1950.9	9.6
90°-150°	6627.6	32.5
90°-180°	9166.0	45.0
0°-180°	20373.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4401	4401	4401	4401	4401	
5°	4401	4384	4338	4371	4363	418
15°	4190	4164	4109	4126	4105	1180
25°	3792	3758	3686	3694	3686	1745
35°	3271	3229	3161	3136	3115	2043
45°	2662	2632	2569	2522	2505	2054
55°	2015	1989	1938	1888	1866	1801
65°	1359	1333	1291	1253	1232	1343
75°	711	703	681	656	664	759
85°	173	169	165	152	148	193
90°	3	36	97	91	94	20
95°	144	172	177	177	172	161
105°	595	603	609	614	614	628
115°	1107	1123	1118	1115	1107	1095
125°	1610	1635	1627	1618	1615	1439
135°	2083	2114	2119	2116	2109	1610
145°	2529	2548	2564	2567	2556	1580
155°	2892	2899	2908	2922	2913	1331
165°	3146	3142	3142	3162	3148	887
175°	3273	3265	3259	3279	3262	311
180°	3279	3279	3279	3279	3279	

TEST NUMBER: P904858

CATALOG NUMBER: DFN2DIP-TR4F0-120D110US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4401.0	4401.0	4401.0	4401.0	4401.0
2.5°	4426.6	4405.4	4358.8	4401.0	4392.9
5°	4401.0	4384.3	4337.7	4371.3	4363.2
7.5°	4371.3	4346.2	4299.5	4333.6	4325.1
10°	4325.1	4295.4	4244.7	4278.4	4265.9
12.5°	4261.3	4236.2	4185.5	4206.6	4198.0
15°	4189.5	4164.3	4109.1	4126.2	4105.1
17.5°	4100.6	4075.5	4020.2	4041.3	4020.2
20°	4003.2	3978.0	3918.8	3931.3	3914.8
22.5°	3906.2	3868.0	3812.8	3812.8	3804.3
25°	3791.7	3758.0	3686.2	3694.3	3686.2
27.5°	3664.6	3635.0	3580.2	3567.6	3546.6
30°	3538.0	3503.9	3440.6	3428.0	3411.0
32.5°	3402.4	3377.3	3309.5	3283.9	3266.9
35°	3271.3	3229.1	3161.3	3135.7	3114.6
37.5°	3123.1	3085.0	3017.2	2987.6	2966.5
40°	2971.0	2936.9	2869.0	2831.3	2814.2
42.5°	2822.8	2788.7	2721.3	2678.7	2653.5
45°	2662.0	2632.4	2568.6	2522.4	2505.4
47.5°	2505.4	2475.7	2407.9	2361.3	2336.1
50°	2340.1	2319.0	2259.7	2200.5	2179.3
52.5°	2179.3	2149.8	2095.0	2048.2	2018.6
55°	2014.6	1989.0	1938.2	1887.5	1866.4
57.5°	1849.4	1828.2	1773.0	1722.3	1705.2
60°	1684.1	1667.5	1608.3	1561.6	1549.0
62.5°	1523.4	1493.7	1451.6	1409.4	1392.3
65°	1358.7	1333.0	1290.8	1252.6	1231.6
67.5°	1189.4	1167.8	1130.1	1100.5	1083.5
70°	1032.6	1015.6	977.4	947.8	931.2
72.5°	871.9	854.9	833.8	804.2	791.5
75°	710.8	702.7	681.1	656.0	664.5
77.5°	567.0	550.0	541.5	528.9	516.3
80°	423.4	418.9	410.4	397.8	389.3
82.5°	287.8	287.8	283.8	266.7	266.7
85°	173.3	169.3	165.2	152.2	148.2
87.5°	76.3	67.8	59.3	46.7	42.2
90°	2.9	35.6	96.9	91.0	93.9
92.5°	61.3	83.0	86.0	89.0	89.0
95°	144.3	172.0	176.9	176.9	172.0
97.5°	240.3	265.9	276.8	276.8	276.8
100°	350.9	373.6	381.5	381.5	378.6
102.5°	467.6	484.4	495.3	498.2	495.3
105°	595.1	603.0	609.0	613.9	613.9
107.5°	721.6	733.5	733.5	735.5	721.6
110°	844.2	860.1	860.1	860.1	852.2

TEST NUMBER: P904858

CATALOG NUMBER: DFN2DIP-TR4F0-120D110US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	976.7	993.4	990.5	982.6	976.7
115°	1107.2	1122.9	1118.0	1115.1	1107.2
117.5°	1236.7	1258.4	1244.5	1236.7	1228.8
120°	1367.2	1388.9	1367.2	1367.2	1358.3
122.5°	1485.8	1513.4	1499.6	1491.7	1485.8
125°	1610.3	1635.0	1627.1	1618.3	1615.2
127.5°	1731.9	1762.6	1751.7	1739.8	1731.9
130°	1845.6	1881.2	1876.2	1870.3	1859.4
132.5°	1973.1	2000.8	2002.8	1989.0	1981.0
135°	2082.8	2113.5	2119.4	2116.5	2108.6
137.5°	2205.5	2230.1	2235.1	2233.1	2221.3
140°	2313.2	2337.9	2351.7	2351.7	2340.9
142.5°	2423.9	2448.6	2456.5	2459.5	2448.6
145°	2528.7	2548.4	2564.3	2567.2	2556.4
147.5°	2622.6	2647.3	2659.2	2664.1	2653.3
150°	2719.5	2736.3	2747.1	2756.1	2747.1
152.5°	2805.5	2822.3	2836.1	2847.0	2836.1
155°	2891.5	2899.4	2908.3	2922.2	2913.2
157.5°	2965.6	2971.6	2976.5	2996.2	2982.4
160°	3031.9	3037.8	3040.7	3057.6	3045.7
162.5°	3093.1	3093.1	3096.2	3114.9	3101.1
165°	3145.5	3142.5	3142.5	3162.3	3148.5
167.5°	3193.0	3184.1	3184.1	3203.9	3190.0
170°	3228.6	3220.7	3217.7	3237.4	3220.7
172.5°	3253.3	3245.4	3242.4	3262.2	3245.4
175°	3273.1	3265.2	3259.2	3279.0	3262.2
177.5°	3283.9	3276.0	3270.1	3286.9	3270.1
180°	3279.0	3279.0	3279.0	3279.0	3279.0

TEST NUMBER: P904858

CATALOG NUMBER: DFN2DIP-TR4F0-120D110US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.06	12.97	12.98	13.90	15.10	11.63	12.54	12.55	13.47	14.67
	3H	13.73	14.54	14.65	15.48	16.71	13.26	14.07	14.18	15.01	16.23
	4H	14.32	15.09	15.26	16.03	17.27	13.84	14.62	14.78	15.56	16.79
	6H	14.72	15.43	15.67	16.38	17.63	14.24	14.96	15.20	15.91	17.15
	8H	14.83	15.50	15.78	16.47	17.71	14.35	15.03	15.31	16.00	17.24
	12H	14.88	15.52	15.84	16.48	17.75	14.40	15.04	15.36	16.00	17.27
4H	2H	12.53	13.30	13.48	14.25	15.48	12.19	12.96	13.13	13.90	15.14
	3H	14.40	15.05	15.36	16.02	17.27	14.01	14.65	14.96	15.63	16.87
	4H	15.12	15.71	16.08	16.68	17.95	14.71	15.30	15.68	16.27	17.54
	6H	15.64	16.14	16.61	17.14	18.41	15.23	15.73	16.20	16.73	18.00
	8H	15.79	16.26	16.77	17.25	18.53	15.37	15.85	16.35	16.84	18.12
	12H	15.86	16.29	16.86	17.29	18.58	15.44	15.87	16.44	16.87	18.16
8H	4H	15.32	15.79	16.30	16.78	18.06	14.96	15.43	15.94	16.42	17.70
	6H	15.95	16.34	16.96	17.37	18.65	15.59	15.98	16.59	17.01	18.29
	8H	16.17	16.52	17.19	17.54	18.84	15.80	16.15	16.82	17.17	18.47
	12H	16.31	16.61	17.32	17.62	18.97	15.92	16.23	16.94	17.24	18.58
12H	4H	15.31	15.73	16.31	16.74	18.03	14.95	15.38	15.95	16.39	17.67
	6H	15.98	16.33	17.00	17.35	18.65	15.63	15.98	16.64	16.99	18.29
	8H	16.23	16.53	17.24	17.54	18.89	15.87	16.17	16.89	17.18	18.53