

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907281

Luminaire Tested: DFN2DIP-TR4F0-040D060US835-RLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P907281  
REPORT IS A COMBINATION OF REPORTS P901926 AND P898849  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-040D060US835-RLLONL  
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9340.0 lumens  
Efficiency: N/A  
Efficacy: 121.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 76.7  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9952  
Total Harmonic Distortion (THDi): 0.069  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P907281  
CATALOG NUMBER: DFN2DIP-TR4F0-040D060US835-RLLONL

### Luminous Intensity Polar Plot

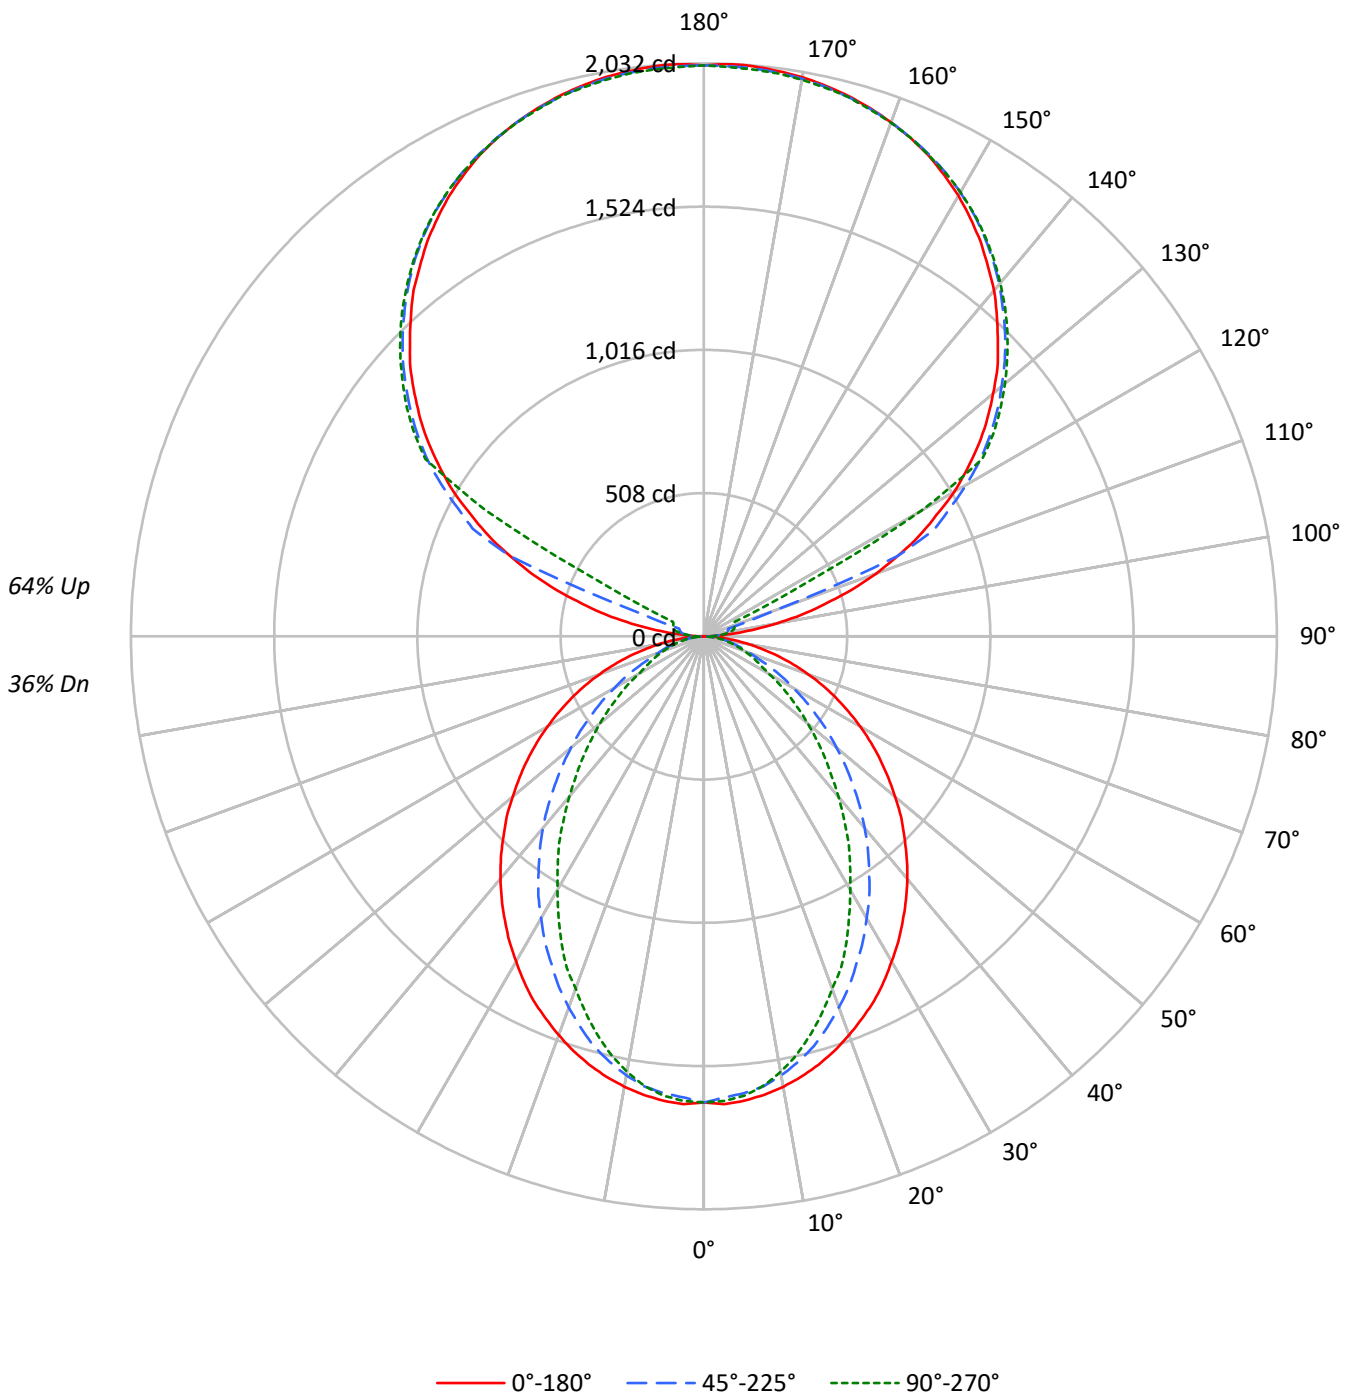



TEST NUMBER: P907281

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US835-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	36				36
1	95	91	87	84	86	83	80	77	67	65	63	52	51	50	39	38	38	31				31
2	87	80	74	69	78	73	68	63	59	56	53	46	44	42	35	33	32	27				27
3	79	70	63	58	72	64	58	53	52	48	45	41	38	36	31	29	28	23				23
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24	20				20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	25	23	21	18				18
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19	16				16
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17	14				14
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15	13				13
9	49	37	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14	12				12
10	46	34	27	23	42	32	25	21	26	22	18	22	18	15	17	14	13	11				11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1313	1313	1313
5°	1315	1292	1301
10°	1302	1267	1258
15°	1285	1225	1193
20°	1261	1167	1113
25°	1237	1103	1035
30°	1204	1036	937
35°	1172	965	850
40°	1140	891	751
45°	1102	809	661
50°	1063	727	574
55°	1022	638	489
60°	975	546	403
65°	920	452	362
70°	855	364	328
75°	772	321	298
80°	652	269	259
85°	455	180	194

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1102 cd/sqm



TEST NUMBER: P907281

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US835-RLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	154.9	1.7
10°-20°	425.3	4.6
20°-30°	597.2	6.4
30°-40°	650.9	7.0
40°-50°	598.3	6.4
50°-60°	469.9	5.0
60°-70°	305.8	3.3
70°-80°	157.4	1.7
80°-90°	43.8	0.5
90°-100°	66.8	0.7
100°-110°	248.9	2.7
110°-120°	660.2	7.1
120°-130°	1094.9	11.7
130°-140°	1163.0	12.5
140°-150°	1080.9	11.6
150°-160°	869.0	9.3
160°-170°	560.0	6.0
170°-180°	192.7	2.1
0°-30°	1177.4	12.6
0°-40°	1828.4	19.6
0°-60°	2896.5	31.0
0°-90°	3403.6	36.4
90°-120°	975.8	10.4
90°-150°	4314.7	46.2
90°-180°	5936.0	63.6
0°-180°	9340.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1653	1653	1653	1653	1653	
5°	1653	1646	1626	1640	1635	157
15°	1572	1556	1505	1477	1462	443
25°	1427	1379	1281	1219	1197	656
35°	1230	1154	1022	928	895	770
45°	1005	905	748	642	606	776
55°	764	648	486	396	368	683
65°	516	395	260	210	205	512
75°	275	170	120	109	108	291
85°	64	33	28	28	28	74
90°	1	18	29	37	40	9
95°	95	47	57	65	63	113
105°	445	489	89	105	111	476
115°	842	867	904	226	120	829
125°	1191	1210	1238	1248	1253	1062
135°	1474	1498	1511	1525	1522	1139
145°	1710	1708	1733	1744	1736	1069
155°	1883	1870	1887	1896	1884	868
165°	1984	1975	1980	1990	1980	560
175°	2029	2019	2022	2032	2018	193
180°	2025	2025	2025	2025	2025	



TEST NUMBER: P907281

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US835-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1653.2	1653.2	1653.2	1653.2	1653.2
2.5°	1660.7	1653.2	1636.7	1651.8	1648.7
5°	1653.2	1645.7	1626.2	1639.7	1635.3
7.5°	1639.7	1630.8	1609.9	1615.7	1608.3
10°	1621.8	1611.3	1581.4	1576.8	1568.0
12.5°	1599.4	1585.9	1545.4	1536.5	1520.0
15°	1572.4	1555.9	1505.1	1476.7	1461.8
17.5°	1541.0	1517.0	1454.1	1421.3	1397.3
20°	1505.1	1475.1	1400.3	1363.0	1330.0
22.5°	1466.2	1431.8	1344.9	1294.1	1271.8
25°	1427.3	1379.4	1280.6	1219.4	1196.8
27.5°	1381.0	1330.0	1220.8	1150.5	1116.0
30°	1331.6	1274.6	1154.9	1078.7	1038.3
32.5°	1283.7	1214.8	1092.2	1002.4	964.9
35°	1229.9	1153.5	1021.9	927.6	894.6
37.5°	1177.5	1095.1	956.0	852.7	815.4
40°	1122.1	1032.4	887.2	781.0	742.1
42.5°	1065.2	969.5	818.4	707.6	670.3
45°	1005.4	905.1	748.1	641.8	605.9
47.5°	948.6	842.4	680.8	574.5	541.6
50°	885.7	779.5	614.9	511.6	480.3
52.5°	824.3	712.1	552.1	453.3	424.9
55°	764.5	647.8	486.2	396.5	368.1
57.5°	703.2	583.5	427.9	344.1	320.2
60°	640.3	520.6	366.5	290.3	266.4
62.5°	579.1	459.4	314.1	242.4	230.5
65°	516.2	394.9	260.3	209.5	204.9
67.5°	456.4	335.1	209.5	184.0	179.5
70°	393.5	276.8	173.5	158.6	152.5
72.5°	333.7	222.9	145.1	133.2	130.2
75°	275.2	170.5	119.7	109.2	107.8
77.5°	217.0	121.1	94.3	88.3	85.2
80°	163.0	86.8	71.7	65.9	65.9
82.5°	113.7	58.4	49.4	46.3	46.3
85°	64.3	32.9	28.4	28.4	28.4
87.5°	24.0	11.9	11.9	10.5	10.5
90°	1.4	17.6	29.2	36.7	39.5
92.5°	36.7	30.8	35.1	38.1	39.5
95°	95.2	46.8	57.1	64.6	63.0
97.5°	171.4	51.3	74.6	79.2	80.6
100°	259.4	58.6	83.5	95.2	98.1
102.5°	356.0	353.2	86.5	102.5	107.0
105°	445.4	489.4	89.4	105.4	111.4
107.5°	549.5	586.0	92.4	108.4	114.3
110°	649.2	679.8	256.5	110.0	115.7



TEST NUMBER: P907281

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US835-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	742.9	769.2	744.3	112.7	117.3
115°	842.5	867.4	904.1	225.7	120.2
117.5°	928.9	958.2	983.2	773.6	389.7
120°	1025.7	1047.6	1074.1	1091.6	893.8
122.5°	1107.6	1131.1	1160.5	1169.2	1170.8
125°	1191.2	1210.3	1238.1	1248.4	1252.7
127.5°	1267.4	1287.9	1310.0	1324.6	1326.0
130°	1339.2	1362.7	1378.7	1394.9	1393.5
132.5°	1412.5	1431.6	1447.6	1460.8	1459.4
135°	1474.1	1497.6	1510.6	1525.4	1522.4
137.5°	1538.4	1556.0	1570.8	1585.4	1581.1
140°	1601.4	1613.3	1629.3	1642.5	1635.2
142.5°	1654.3	1664.6	1683.6	1695.2	1687.9
145°	1710.0	1708.4	1733.3	1743.6	1736.3
147.5°	1758.2	1753.8	1778.7	1786.0	1780.3
150°	1805.2	1794.9	1818.4	1827.1	1819.8
152.5°	1844.7	1833.0	1854.9	1863.8	1853.5
155°	1882.8	1869.7	1887.3	1896.0	1884.3
157.5°	1913.6	1901.9	1915.1	1925.4	1913.6
160°	1940.0	1931.1	1940.0	1948.7	1938.5
162.5°	1963.3	1954.6	1961.9	1972.2	1959.0
165°	1983.9	1975.2	1979.5	1989.8	1979.5
167.5°	2000.0	1991.2	1995.7	2006.0	1992.7
170°	2013.3	2004.4	2007.4	2017.6	2004.4
172.5°	2022.0	2013.3	2016.2	2026.5	2013.3
175°	2029.3	2019.0	2022.0	2032.2	2017.6
177.5°	2032.2	2022.0	2023.5	2033.8	2020.6
180°	2024.9	2024.9	2024.9	2024.9	2024.9



TEST NUMBER: P907281  
 CATALOG NUMBER: DFN2DIP-TR4F0-040D060US835-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.67	7.40	7.75	8.47	9.93	2.65	3.38	3.72	4.45	5.90
	3H	8.34	9.00	9.42	10.07	11.55	3.83	4.48	4.91	5.56	7.03
	4H	8.95	9.57	10.04	10.65	12.12	4.28	4.89	5.37	5.97	7.45
	6H	9.36	9.93	10.46	11.02	12.51	4.59	5.16	5.69	6.24	7.74
	8H	9.49	10.03	10.59	11.13	12.61	4.68	5.22	5.78	6.32	7.80
	12H	9.55	10.06	10.65	11.15	12.66	4.72	5.24	5.83	6.33	7.83
4H	2H	6.68	7.30	7.78	8.38	9.86	3.23	3.85	4.33	4.93	6.41
	3H	8.50	9.01	9.60	10.12	11.61	4.57	5.09	5.68	6.19	7.68
	4H	9.19	9.66	10.30	10.76	12.27	5.12	5.59	6.23	6.69	8.20
	6H	9.70	10.10	10.81	11.22	12.73	5.53	5.94	6.65	7.06	8.56
	8H	9.87	10.25	10.99	11.36	12.88	5.66	6.04	6.78	7.15	8.67
	12H	9.96	10.30	11.09	11.43	12.95	5.72	6.06	6.85	7.19	8.71
8H	4H	9.15	9.53	10.26	10.64	12.16	5.39	5.77	6.51	6.88	8.40
	6H	9.71	10.02	10.85	11.18	12.69	5.91	6.22	7.04	7.37	8.89
	8H	9.93	10.20	11.07	11.33	12.87	6.10	6.37	7.24	7.50	9.04
	12H	10.06	10.30	11.21	11.43	13.01	6.21	6.45	7.36	7.58	9.16
12H	4H	9.10	9.44	10.23	10.56	12.09	5.39	5.73	6.52	6.86	8.38
	6H	9.69	9.96	10.83	11.09	12.63	5.95	6.23	7.10	7.36	8.90
	8H	9.90	10.14	11.05	11.27	12.85	6.16	6.40	7.31	7.53	9.11