

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907298

Luminaire Tested: DFN2DIP-TR4F0-040D110US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907298
REPORT IS A COMBINATION OF REPORTS P900495 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D110US835-FLLFLL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13695.0 lumens
Efficiency: N/A
Efficacy: 117.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 116.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907298

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US835-FLLFLL

Luminous Intensity Polar Plot

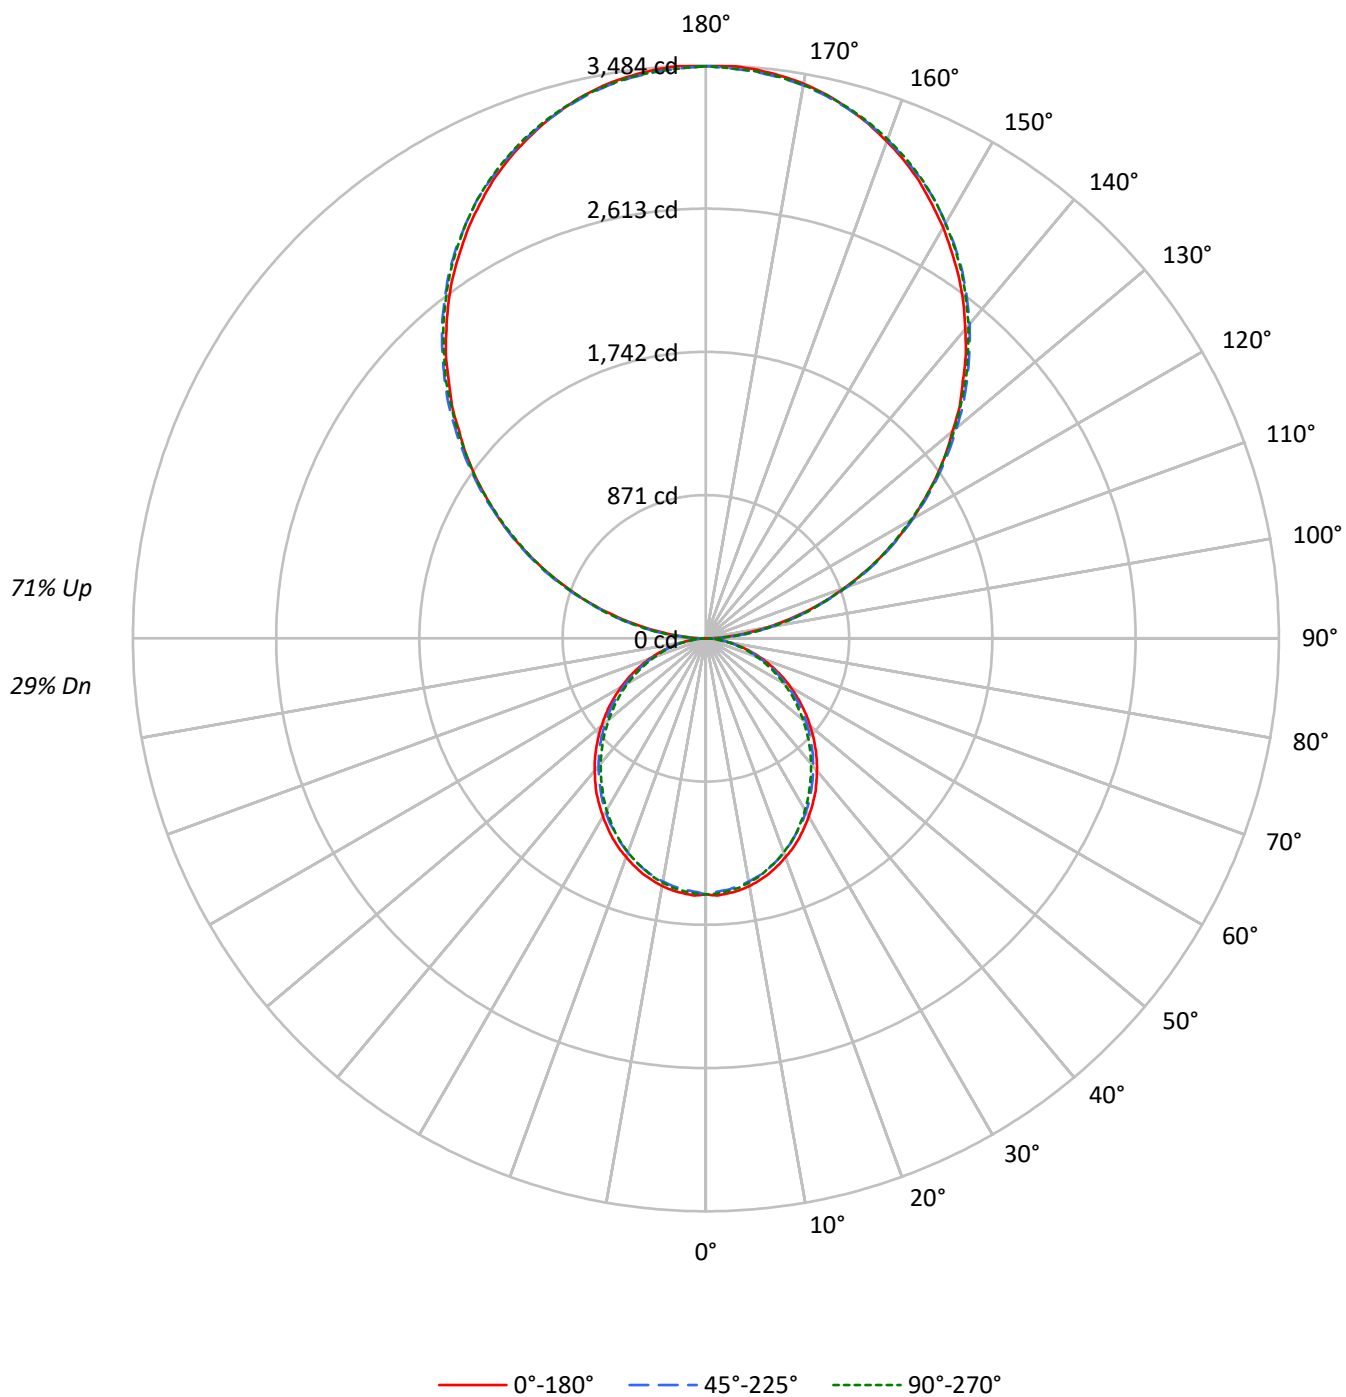

TEST NUMBER: P907298

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31
2	85	78	72	67	76	70	65	60	55	51	48	41	39	37	29	27	26
3	77	68	61	55	69	61	55	50	48	44	41	36	34	31	25	24	22
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	23	21	19
5	65	53	46	40	58	48	41	36	38	33	30	29	26	23	20	18	17
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	15
7	55	43	35	30	49	39	32	27	31	26	23	24	20	18	17	15	13
8	51	39	31	26	45	35	29	24	28	23	20	22	18	16	15	13	12
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1236	1236	1236
5°	1238	1219	1227
10°	1228	1203	1211
15°	1210	1183	1185
20°	1186	1155	1158
25°	1162	1123	1127
30°	1131	1092	1088
35°	1102	1056	1047
40°	1067	1019	1008
45°	1032	983	967
50°	993	944	921
55°	952	900	878
60°	907	847	828
65°	857	793	771
70°	793	726	708
75°	705	646	650
80°	599	545	540
85°	433	370	358

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2711 cd/sqm

TEST NUMBER: P907298

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.5	1.1
10°-20°	412.2	3.0
20°-30°	605.7	4.4
30°-40°	703.5	5.1
40°-50°	702.6	5.1
50°-60°	612.7	4.5
60°-70°	452.9	3.3
70°-80°	256.2	1.9
80°-90°	77.5	0.6
90°-100°	215.3	1.6
100°-110°	684.0	5.0
110°-120°	1170.5	8.5
120°-130°	1539.4	11.2
130°-140°	1727.9	12.6
140°-150°	1694.4	12.4
150°-160°	1421.4	10.4
160°-170°	942.6	6.9
170°-180°	329.5	2.4
0°-30°	1164.4	8.5
0°-40°	1867.9	13.6
0°-60°	3183.2	23.2
0°-90°	3969.9	29.0
90°-120°	2069.8	15.1
90°-150°	7031.6	51.3
90°-180°	9725.0	71.0
0°-180°	13695.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	68
90°	3	38	103	96	100	13
95°	153	182	188	188	182	170
105°	631	640	646	651	651	666
115°	1175	1191	1186	1183	1175	1162
125°	1708	1735	1726	1717	1714	1527
135°	2210	2242	2249	2246	2237	1708
145°	2683	2704	2721	2724	2712	1676
155°	3068	3076	3086	3100	3091	1412
165°	3337	3334	3334	3355	3340	941
175°	3473	3464	3458	3479	3461	330
180°	3479	3479	3479	3479	3479	

TEST NUMBER: P907298

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	3.1	37.8	102.8	96.5	99.6
92.5°	65.0	88.1	91.2	94.4	94.4
95°	153.1	182.5	187.7	187.7	182.5
97.5°	254.9	282.1	293.7	293.7	293.7
100°	372.3	396.4	404.8	404.8	401.7
102.5°	496.1	513.9	525.5	528.6	525.5
105°	631.4	639.8	646.1	651.3	651.3
107.5°	765.6	778.2	778.2	780.3	765.6
110°	895.7	912.5	912.5	912.5	904.1

TEST NUMBER: P907298

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US835-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1036.2	1054.0	1050.9	1042.5	1036.2
115°	1174.7	1191.4	1186.2	1183.1	1174.7
117.5°	1312.1	1335.1	1320.4	1312.1	1303.7
120°	1450.5	1473.6	1450.5	1450.5	1441.1
122.5°	1576.4	1605.7	1591.0	1582.6	1576.4
125°	1708.5	1734.7	1726.3	1716.9	1713.7
127.5°	1837.5	1870.0	1858.5	1845.9	1837.5
130°	1958.1	1995.9	1990.6	1984.3	1972.8
132.5°	2093.4	2122.8	2124.9	2110.2	2101.8
135°	2209.8	2242.3	2248.6	2245.5	2237.1
137.5°	2339.9	2366.1	2371.3	2369.2	2356.7
140°	2454.2	2480.4	2495.1	2495.1	2483.6
142.5°	2571.7	2597.9	2606.3	2609.4	2597.9
145°	2682.8	2703.8	2720.6	2723.7	2712.2
147.5°	2782.5	2808.7	2821.3	2826.5	2815.0
150°	2885.3	2903.1	2914.6	2924.1	2914.6
152.5°	2976.5	2994.3	3009.0	3020.6	3009.0
155°	3067.8	3076.1	3085.6	3100.3	3090.8
157.5°	3146.4	3152.7	3157.9	3178.9	3164.2
160°	3216.7	3223.0	3226.1	3244.0	3231.4
162.5°	3281.7	3281.7	3284.9	3304.8	3290.1
165°	3337.3	3334.1	3334.1	3355.1	3340.4
167.5°	3387.6	3378.2	3378.2	3399.2	3384.5
170°	3425.4	3417.0	3413.9	3434.8	3417.0
172.5°	3451.6	3443.2	3440.1	3461.1	3443.2
175°	3472.6	3464.2	3457.9	3478.9	3461.1
177.5°	3484.1	3475.7	3469.4	3487.3	3469.4
180°	3478.9	3478.9	3478.9	3478.9	3478.9

TEST NUMBER: P907298

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.65	6.35	6.77	7.46	9.00	5.22	5.92	6.33	7.03	8.57
	3H	7.29	7.92	8.42	9.04	10.60	6.82	7.45	7.95	8.57	10.13
	4H	7.87	8.47	9.01	9.59	11.16	7.40	8.00	8.54	9.12	10.68
	6H	8.27	8.81	9.41	9.94	11.51	7.79	8.34	8.94	9.46	11.04
	8H	8.37	8.89	9.51	10.03	11.59	7.89	8.41	9.04	9.55	11.12
	12H	8.41	8.90	9.56	10.04	11.63	7.93	8.42	9.08	9.56	11.15
4H	2H	6.09	6.68	7.23	7.81	9.37	5.74	6.34	6.89	7.46	9.03
	3H	7.94	8.44	9.09	9.58	11.16	7.55	8.04	8.70	9.19	10.77
	4H	8.65	9.10	9.80	10.24	11.84	8.24	8.70	9.39	9.83	11.43
	6H	9.15	9.54	10.31	10.70	12.29	8.74	9.13	9.90	10.29	11.88
	8H	9.30	9.66	10.46	10.81	12.42	8.89	9.25	10.04	10.40	12.01
	12H	9.36	9.69	10.54	10.86	12.46	8.94	9.27	10.12	10.44	12.04
8H	4H	8.83	9.20	9.99	10.35	11.95	8.47	8.84	9.63	9.99	11.59
	6H	9.45	9.76	10.63	10.95	12.55	9.09	9.39	10.27	10.59	12.19
	8H	9.67	9.94	10.86	11.11	12.73	9.30	9.57	10.49	10.74	12.36
	12H	9.80	10.03	10.98	11.20	12.85	9.41	9.64	10.60	10.81	12.47
12H	4H	8.81	9.14	9.98	10.30	11.91	8.46	8.79	9.63	9.95	11.56
	6H	9.48	9.75	10.67	10.92	12.54	9.13	9.39	10.31	10.57	12.19
	8H	9.72	9.95	10.90	11.12	12.77	9.36	9.59	10.55	10.76	12.41

END OF REPORT