

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907356

Luminaire Tested: DFN2DIP-TR4F0-060D070US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907356
REPORT IS A COMBINATION OF REPORTS P900428 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-060D070US835-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11295.0 lumens
Efficiency: N/A
Efficacy: 107.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 105.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907356

CATALOG NUMBER: DFN2DIP-TR4F0-060D070US835-RLLFLL

Luminous Intensity Polar Plot

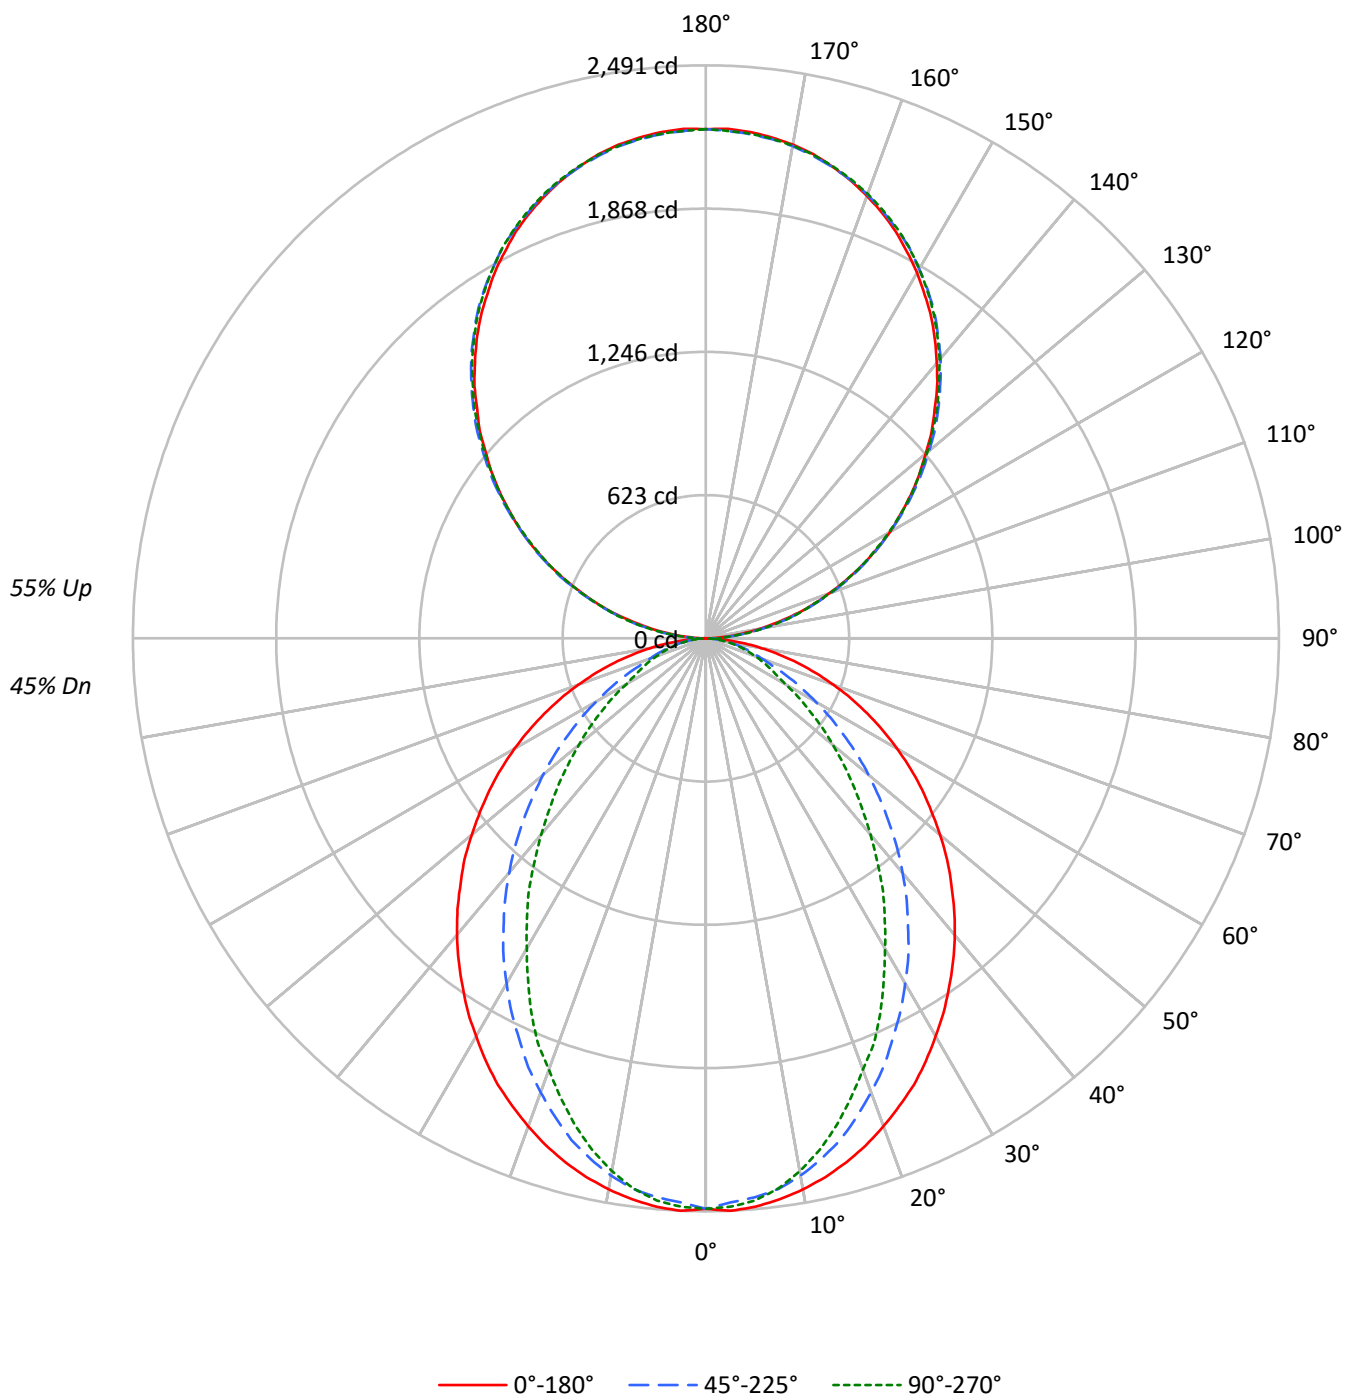

TEST NUMBER: P907356

CATALOG NUMBER: DFN2DIP-TR4F0-060D070US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45	45	45
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39	39	39
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	41	40	38	33	33	33
3	81	72	65	60	74	67	60	56	56	51	48	46	43	40	37	35	33	29	29	29
4	75	64	57	51	68	59	53	47	50	45	41	41	38	35	33	31	29	25	25	25
5	69	57	50	44	63	53	46	41	45	40	36	37	33	30	30	28	25	22	22	22
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20	20	20
7	59	47	39	34	54	43	36	32	37	32	28	31	27	24	25	22	20	18	18	18
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18	16	16	16
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	22	19	17	14	14	14
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13	13	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1970	1970	1970
5°	1973	1939	1951
10°	1954	1901	1888
15°	1927	1838	1789
20°	1891	1751	1669
25°	1855	1654	1553
30°	1806	1555	1405
35°	1758	1448	1275
40°	1709	1337	1127
45°	1653	1214	992
50°	1594	1090	861
55°	1533	957	734
60°	1462	819	604
65°	1381	678	544
70°	1282	547	492
75°	1158	482	448
80°	978	404	388
85°	682	270	291

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1725 cd/sqm

TEST NUMBER: P907356

CATALOG NUMBER: DFN2DIP-TR4F0-060D070US835-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	2.1
10°-20°	638.0	5.6
20°-30°	895.7	7.9
30°-40°	976.4	8.6
40°-50°	897.4	7.9
50°-60°	704.8	6.2
60°-70°	458.8	4.1
70°-80°	236.1	2.1
80°-90°	66.6	0.6
90°-100°	137.0	1.2
100°-110°	435.3	3.9
110°-120°	744.9	6.6
120°-130°	979.6	8.7
130°-140°	1099.6	9.7
140°-150°	1078.3	9.5
150°-160°	904.5	8.0
160°-170°	599.9	5.3
170°-180°	209.7	1.9
0°-30°	1766.2	15.6
0°-40°	2742.6	24.3
0°-60°	4344.8	38.5
0°-90°	5106.3	45.2
90°-120°	1317.2	11.7
90°-150°	4474.7	39.6
90°-180°	6189.0	54.8
0°-180°	11295.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	2	24	65	61	63	11
95°	97	116	120	120	116	108
105°	402	407	411	414	414	424
115°	748	758	755	753	748	739
125°	1087	1104	1099	1093	1091	972
135°	1406	1427	1431	1429	1424	1087
145°	1707	1721	1731	1733	1726	1067
155°	1952	1958	1964	1973	1967	899
165°	2124	2122	2122	2135	2126	599
175°	2210	2204	2200	2214	2202	210
180°	2214	2214	2214	2214	2214	

TEST NUMBER: P907356

CATALOG NUMBER: DFN2DIP-TR4F0-060D070US835-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	2.0	24.0	65.4	61.4	63.4
92.5°	41.4	56.1	58.1	60.1	60.1
95°	97.4	116.1	119.5	119.5	116.1
97.5°	162.2	179.5	186.9	186.9	186.9
100°	236.9	252.3	257.6	257.6	255.6
102.5°	315.7	327.0	334.4	336.4	334.4
105°	401.8	407.1	411.1	414.5	414.5
107.5°	487.2	495.2	495.2	496.6	487.2
110°	570.0	580.7	580.7	580.7	575.3

TEST NUMBER: P907356

CATALOG NUMBER: DFN2DIP-TR4F0-060D070US835-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	659.4	670.8	668.8	663.4	659.4
115°	747.5	758.2	754.9	752.9	747.5
117.5°	834.9	849.6	840.3	834.9	829.6
120°	923.0	937.7	923.0	923.0	917.0
122.5°	1003.1	1021.8	1012.5	1007.1	1003.1
125°	1087.2	1103.9	1098.6	1092.6	1090.6
127.5°	1169.3	1190.0	1182.7	1174.7	1169.3
130°	1246.1	1270.1	1266.8	1262.8	1255.4
132.5°	1332.2	1350.9	1352.2	1342.9	1337.5
135°	1406.3	1426.9	1431.0	1428.9	1423.6
137.5°	1489.0	1505.7	1509.0	1507.7	1499.7
140°	1561.8	1578.5	1587.8	1587.8	1580.5
142.5°	1636.5	1653.2	1658.5	1660.5	1653.2
145°	1707.3	1720.6	1731.3	1733.3	1726.0
147.5°	1770.7	1787.4	1795.4	1798.7	1791.4
150°	1836.1	1847.4	1854.8	1860.8	1854.8
152.5°	1894.1	1905.5	1914.8	1922.2	1914.8
155°	1952.2	1957.5	1963.6	1972.9	1966.9
157.5°	2002.3	2006.3	2009.6	2023.0	2013.6
160°	2047.0	2051.0	2053.0	2064.3	2056.3
162.5°	2088.4	2088.4	2090.4	2103.0	2093.7
165°	2123.7	2121.7	2121.7	2135.1	2125.7
167.5°	2155.8	2149.8	2149.8	2163.1	2153.8
170°	2179.8	2174.5	2172.5	2185.8	2174.5
172.5°	2196.5	2191.1	2189.1	2202.5	2191.1
175°	2209.8	2204.5	2200.5	2213.8	2202.5
177.5°	2217.2	2211.8	2207.8	2219.2	2207.8
180°	2213.8	2213.8	2213.8	2213.8	2213.8

TEST NUMBER: P907356

CATALOG NUMBER: DFN2DIP-TR4F0-060D070US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.03	9.82	10.03	10.83	12.17	5.00	5.80	6.01	6.81	8.15
	3H	10.71	11.41	11.72	12.43	13.79	6.19	6.90	7.21	7.92	9.28
	4H	11.31	11.98	12.34	13.00	14.37	6.64	7.31	7.67	8.33	9.70
	6H	11.73	12.35	12.77	13.37	14.76	6.96	7.58	8.00	8.60	9.99
	8H	11.86	12.44	12.90	13.49	14.86	7.05	7.64	8.09	8.68	10.06
	12H	11.92	12.47	12.96	13.51	14.91	7.09	7.65	8.14	8.69	10.09
4H	2H	9.04	9.72	10.08	10.74	12.11	5.60	6.27	6.63	7.29	8.66
	3H	10.87	11.43	11.91	12.48	13.86	6.94	7.50	7.98	8.55	9.93
	4H	11.56	12.07	12.61	13.11	14.52	7.49	8.00	8.54	9.04	10.45
	6H	12.07	12.51	13.13	13.58	14.98	7.91	8.35	8.97	9.41	10.81
	8H	12.25	12.66	13.31	13.71	15.13	8.04	8.45	9.10	9.50	10.92
	12H	12.34	12.71	13.42	13.78	15.20	8.10	8.47	9.18	9.54	10.96
8H	4H	11.53	11.93	12.58	12.99	14.41	7.77	8.18	8.83	9.23	10.65
	6H	12.09	12.43	13.17	13.53	14.94	8.29	8.62	9.37	9.72	11.13
	8H	12.31	12.60	13.40	13.69	15.12	8.48	8.77	9.57	9.86	11.29
	12H	12.44	12.70	13.53	13.78	15.25	8.60	8.86	9.69	9.93	11.41
12H	4H	11.48	11.85	12.55	12.92	14.34	7.77	8.14	8.85	9.21	10.63
	6H	12.07	12.36	13.15	13.45	14.88	8.33	8.63	9.42	9.71	11.15
	8H	12.28	12.55	13.38	13.62	15.10	8.54	8.80	9.64	9.88	11.36

END OF REPORT