

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907369

Luminaire Tested: DFN2DIP-TR4F0-060D100US835-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907369
REPORT IS A COMBINATION OF REPORTS P902002 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-060D100US835-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15000.0 lumens
Efficiency: N/A
Efficacy: 115.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 129.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907369

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US835-RLLONL

Luminous Intensity Polar Plot

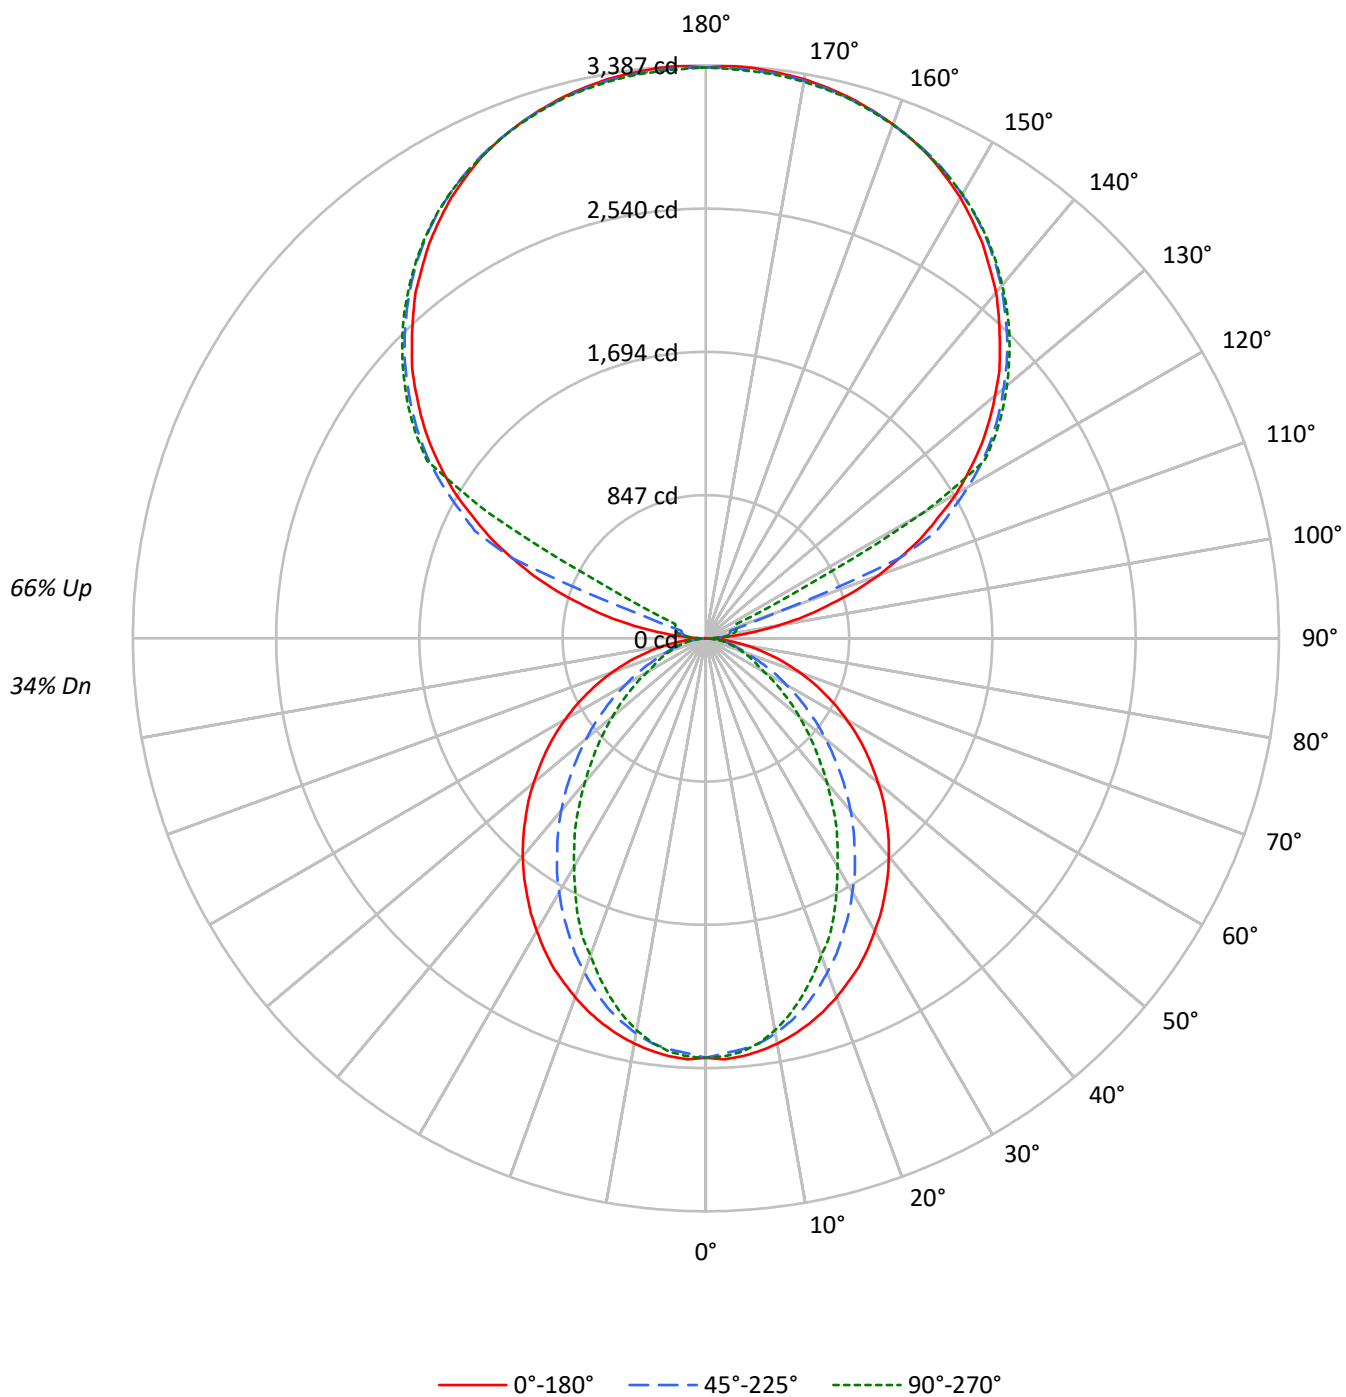

TEST NUMBER: P907369

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	95	90	87	83	85	82	79	76	66	64	62	51	49	48	37	36	36
2	86	79	74	69	78	72	67	63	58	54	52	45	43	41	33	32	30
3	79	70	63	58	71	63	58	53	51	47	44	40	37	35	30	28	26
4	72	62	55	49	65	56	50	45	46	41	37	36	33	30	27	25	23
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20
6	61	50	42	36	55	45	39	34	37	32	28	29	26	23	22	20	18
7	57	45	37	32	51	41	34	30	34	29	25	27	23	20	20	18	16
8	52	41	33	28	47	37	31	26	31	26	22	24	21	18	19	16	14
9	49	37	30	25	44	34	28	23	28	23	20	22	19	16	17	15	13
10	46	34	27	22	41	31	25	21	26	21	18	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1970	1970	1970
5°	1973	1939	1951
10°	1954	1901	1888
15°	1927	1838	1789
20°	1891	1751	1669
25°	1855	1654	1553
30°	1806	1555	1405
35°	1758	1448	1275
40°	1709	1337	1127
45°	1653	1214	992
50°	1594	1090	861
55°	1533	957	734
60°	1462	819	604
65°	1381	678	544
70°	1282	547	492
75°	1158	482	448
80°	978	404	388
85°	682	270	291

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1791 cd/sqm

TEST NUMBER: P907369

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US835-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	1.5
10°-20°	638.0	4.3
20°-30°	895.7	6.0
30°-40°	976.4	6.5
40°-50°	897.4	6.0
50°-60°	704.8	4.7
60°-70°	458.8	3.1
70°-80°	236.1	1.6
80°-90°	66.2	0.4
90°-100°	111.3	0.7
100°-110°	414.9	2.8
110°-120°	1100.3	7.3
120°-130°	1824.9	12.2
130°-140°	1938.4	12.9
140°-150°	1801.5	12.0
150°-160°	1448.4	9.7
160°-170°	933.3	6.2
170°-180°	321.2	2.1
0°-30°	1766.2	11.8
0°-40°	2742.6	18.3
0°-60°	4344.8	29.0
0°-90°	5105.9	34.0
90°-120°	1626.4	10.8
90°-150°	7191.2	47.9
90°-180°	9894.0	66.0
0°-180°	15000.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	2	29	49	61	66	14
95°	159	78	95	108	105	188
105°	742	816	149	176	186	793
115°	1404	1446	1507	376	200	1382
125°	1985	2017	2064	2081	2088	1771
135°	2457	2496	2518	2542	2537	1898
145°	2850	2847	2889	2906	2894	1782
155°	3138	3116	3146	3160	3141	1446
165°	3306	3292	3299	3316	3299	934
175°	3382	3365	3370	3387	3363	322
180°	3375	3375	3375	3375	3375	

TEST NUMBER: P907369

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	2.3	29.3	48.7	61.2	65.8
92.5°	61.2	51.3	58.6	63.5	65.8
95°	158.6	78.0	95.1	107.6	105.0
97.5°	285.6	85.5	124.4	131.9	134.3
100°	432.4	97.7	139.2	158.6	163.6
102.5°	593.3	588.7	144.1	170.8	178.3
105°	742.4	815.7	149.1	175.7	185.6
107.5°	915.8	976.7	154.0	180.7	190.5
110°	1081.9	1133.0	427.4	183.3	192.8

TEST NUMBER: P907369

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1238.2	1282.0	1240.6	187.9	195.5
115°	1404.1	1445.6	1506.8	376.1	200.4
117.5°	1548.2	1597.0	1638.7	1289.3	649.6
120°	1709.5	1746.0	1790.1	1819.4	1489.7
122.5°	1846.1	1885.2	1934.2	1948.7	1951.3
125°	1985.3	2017.2	2063.6	2080.7	2087.9
127.5°	2112.3	2146.5	2183.3	2207.7	2210.0
130°	2232.0	2271.2	2297.9	2324.8	2322.5
132.5°	2354.1	2386.0	2412.7	2434.7	2432.4
135°	2456.8	2495.9	2517.7	2542.3	2537.4
137.5°	2564.1	2593.4	2618.0	2642.4	2635.1
140°	2669.0	2688.8	2715.4	2737.5	2725.3
142.5°	2757.2	2774.3	2805.9	2825.3	2813.2
145°	2850.0	2847.4	2888.9	2906.0	2893.8
147.5°	2930.3	2923.1	2964.5	2976.7	2967.2
150°	3008.6	2991.5	3030.7	3045.2	3033.0
152.5°	3074.4	3055.0	3091.6	3106.3	3089.2
155°	3138.0	3116.2	3145.5	3160.0	3140.6
157.5°	3189.3	3169.9	3191.9	3209.0	3189.3
160°	3233.4	3218.6	3233.4	3247.9	3230.8
162.5°	3272.2	3257.7	3269.9	3287.0	3265.0
165°	3306.4	3291.9	3299.2	3316.3	3299.2
167.5°	3333.4	3318.6	3326.2	3343.3	3321.2
170°	3355.4	3340.7	3345.6	3362.7	3340.7
172.5°	3369.9	3355.4	3360.4	3377.5	3355.4
175°	3382.1	3365.0	3369.9	3387.1	3362.7
177.5°	3387.1	3369.9	3372.6	3389.7	3367.6
180°	3374.9	3374.9	3374.9	3374.9	3374.9

TEST NUMBER: P907369

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.79	8.51	8.88	9.59	11.08	3.77	4.48	4.85	5.56	7.05
	3H	9.46	10.10	10.56	11.19	12.69	4.95	5.59	6.04	6.68	8.18
	4H	10.06	10.67	11.17	11.76	13.27	5.39	6.00	6.50	7.09	8.60
	6H	10.48	11.04	11.60	12.13	13.65	5.71	6.27	6.83	7.36	8.88
	8H	10.60	11.13	11.72	12.24	13.76	5.80	6.33	6.92	7.44	8.95
	12H	10.66	11.16	11.78	12.27	13.80	5.84	6.34	6.96	7.45	8.98
4H	2H	7.80	8.40	8.91	9.50	11.00	4.35	4.95	5.46	6.05	7.55
	3H	9.61	10.12	10.74	11.24	12.76	5.69	6.19	6.81	7.31	8.83
	4H	10.30	10.77	11.43	11.88	13.42	6.23	6.69	7.36	7.80	9.35
	6H	10.81	11.21	11.94	12.34	13.87	6.65	7.04	7.78	8.18	9.71
	8H	10.98	11.35	12.12	12.48	14.03	6.77	7.14	7.90	8.27	9.82
	12H	11.07	11.41	12.22	12.55	14.10	6.83	7.17	7.98	8.31	9.86
8H	4H	10.26	10.63	11.39	11.76	13.30	6.50	6.87	7.63	8.00	9.55
	6H	10.82	11.13	11.98	12.30	13.84	7.02	7.32	8.17	8.49	10.04
	8H	11.04	11.31	12.20	12.45	14.02	7.21	7.48	8.37	8.62	10.19
	12H	11.17	11.41	12.33	12.55	14.15	7.32	7.56	8.49	8.70	10.30
12H	4H	10.21	10.54	11.36	11.68	13.23	6.50	6.84	7.65	7.97	9.53
	6H	10.80	11.07	11.96	12.21	13.78	7.07	7.33	8.23	8.48	10.05
	8H	11.01	11.25	12.18	12.39	13.99	7.27	7.51	8.43	8.65	10.25