

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907370

Luminaire Tested: DFN2DIP-TR4F0-060D110US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907370
REPORT IS A COMBINATION OF REPORTS P900499 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-060D110US835-FLLFLL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15675.0 lumens
Efficiency: N/A
Efficacy: 113.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 138.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907370

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US835-FLLFLL

Luminous Intensity Polar Plot

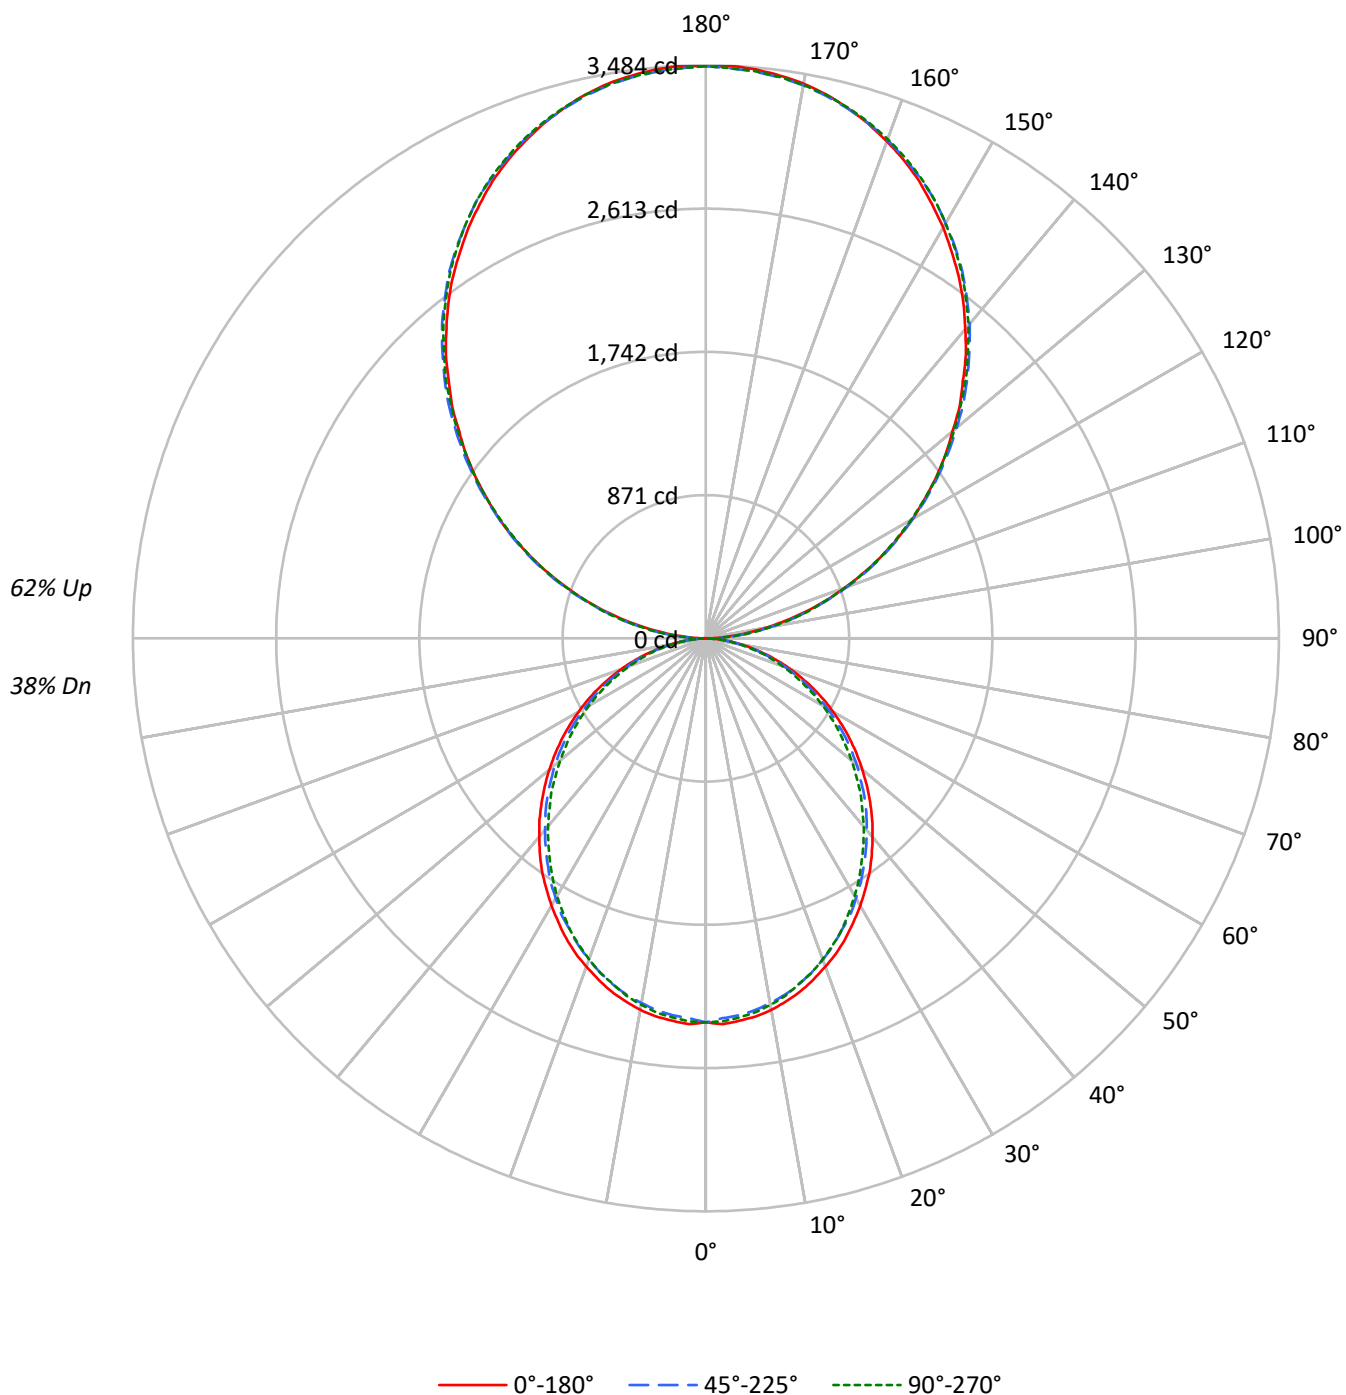

TEST NUMBER: P907370

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45
1	95	91	87	84	86	83	79	76	67	65	63	53	51	50	40	39	38
2	87	79	73	68	78	72	67	63	59	55	52	46	44	42	35	33	32
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27
4	72	62	54	48	65	56	49	44	46	41	37	37	33	30	28	25	23
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18
7	56	44	36	31	51	41	34	29	33	28	24	27	23	20	21	18	16
8	52	40	32	27	47	37	30	25	30	25	22	25	21	18	19	16	14
9	48	37	29	24	44	34	27	23	28	23	19	23	19	16	17	15	13
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1855	1855	1855
5°	1858	1829	1841
10°	1843	1804	1816
15°	1816	1774	1777
20°	1779	1733	1737
25°	1743	1684	1691
30°	1697	1638	1632
35°	1654	1584	1570
40°	1600	1529	1511
45°	1547	1474	1451
50°	1489	1417	1381
55°	1429	1350	1316
60°	1360	1271	1243
65°	1285	1189	1156
70°	1190	1089	1062
75°	1057	970	976
80°	899	817	811
85°	650	554	537

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2711 cd/sqm

TEST NUMBER: P907370

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.7	1.4
10°-20°	618.3	3.9
20°-30°	908.6	5.8
30°-40°	1055.3	6.7
40°-50°	1054.0	6.7
50°-60°	919.0	5.9
60°-70°	679.4	4.3
70°-80°	384.4	2.5
80°-90°	111.3	0.7
90°-100°	215.3	1.4
100°-110°	684.0	4.4
110°-120°	1170.5	7.5
120°-130°	1539.4	9.8
130°-140°	1727.9	11.0
140°-150°	1694.4	10.8
150°-160°	1421.4	9.1
160°-170°	942.6	6.0
170°-180°	329.5	2.1
0°-30°	1746.6	11.1
0°-40°	2801.8	17.9
0°-60°	4774.8	30.5
0°-90°	5949.9	38.0
90°-120°	2069.8	13.2
90°-150°	7031.6	44.9
90°-180°	9725.0	62.0
0°-180°	15675.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2335	2335	2335	2335	2335	
5°	2335	2326	2301	2319	2315	222
15°	2222	2209	2180	2189	2178	626
25°	2011	1994	1955	1960	1955	926
35°	1735	1713	1677	1663	1652	1084
45°	1412	1396	1363	1338	1329	1090
55°	1069	1055	1028	1001	990	955
65°	721	707	685	664	653	713
75°	377	373	361	348	352	402
85°	92	90	88	81	79	103
90°	3	38	103	96	100	15
95°	153	182	188	188	182	170
105°	631	640	646	651	651	666
115°	1175	1191	1186	1183	1175	1162
125°	1708	1735	1726	1717	1714	1527
135°	2210	2242	2249	2246	2237	1708
145°	2683	2704	2721	2724	2712	1676
155°	3068	3076	3086	3100	3091	1412
165°	3337	3334	3334	3355	3340	941
175°	3473	3464	3458	3479	3461	330
180°	3479	3479	3479	3479	3479	

TEST NUMBER: P907370

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2334.6	2334.6	2334.6	2334.6	2334.6
2.5°	2348.2	2337.0	2312.2	2334.6	2330.3
5°	2334.6	2325.8	2301.0	2318.9	2314.6
7.5°	2318.9	2305.6	2280.8	2298.9	2294.4
10°	2294.4	2278.7	2251.7	2269.6	2262.9
12.5°	2260.6	2247.2	2220.3	2231.5	2227.0
15°	2222.4	2209.1	2179.8	2188.9	2177.7
17.5°	2175.3	2162.0	2132.7	2143.8	2132.7
20°	2123.6	2110.3	2078.8	2085.5	2076.7
22.5°	2072.2	2051.9	2022.6	2022.6	2018.1
25°	2011.4	1993.6	1955.4	1959.7	1955.4
27.5°	1944.0	1928.3	1899.2	1892.6	1881.4
30°	1876.9	1858.7	1825.2	1818.5	1809.4
32.5°	1804.9	1791.6	1755.6	1742.0	1733.0
35°	1735.4	1713.0	1677.0	1663.4	1652.2
37.5°	1656.8	1636.5	1600.6	1584.8	1573.6
40°	1576.0	1557.9	1522.0	1502.0	1492.9
42.5°	1497.4	1479.3	1443.6	1421.0	1407.6
45°	1412.2	1396.4	1362.6	1338.1	1329.0
47.5°	1329.0	1313.3	1277.4	1252.6	1239.2
50°	1241.4	1230.2	1198.8	1167.3	1156.1
52.5°	1156.1	1140.4	1111.3	1086.6	1070.9
55°	1068.7	1055.1	1028.2	1001.3	990.1
57.5°	981.1	969.9	940.6	913.7	904.6
60°	893.4	884.6	853.2	828.4	821.7
62.5°	808.1	792.4	770.0	747.6	738.6
65°	720.7	707.2	684.8	664.5	653.3
67.5°	630.9	619.5	599.5	583.8	574.7
70°	547.8	538.8	518.5	502.8	494.0
72.5°	462.5	453.5	442.3	426.6	419.9
75°	377.0	372.8	361.3	348.0	352.5
77.5°	300.8	291.8	287.2	280.6	273.9
80°	224.6	222.2	217.7	211.0	206.5
82.5°	152.7	152.7	150.5	141.5	141.5
85°	91.9	89.8	87.6	80.7	78.6
87.5°	40.5	36.0	31.4	24.8	22.4
90°	3.1	37.8	102.8	96.5	99.6
92.5°	65.0	88.1	91.2	94.4	94.4
95°	153.1	182.5	187.7	187.7	182.5
97.5°	254.9	282.1	293.7	293.7	293.7
100°	372.3	396.4	404.8	404.8	401.7
102.5°	496.1	513.9	525.5	528.6	525.5
105°	631.4	639.8	646.1	651.3	651.3
107.5°	765.6	778.2	778.2	780.3	765.6
110°	895.7	912.5	912.5	912.5	904.1

TEST NUMBER: P907370

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US835-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1036.2	1054.0	1050.9	1042.5	1036.2
115°	1174.7	1191.4	1186.2	1183.1	1174.7
117.5°	1312.1	1335.1	1320.4	1312.1	1303.7
120°	1450.5	1473.6	1450.5	1450.5	1441.1
122.5°	1576.4	1605.7	1591.0	1582.6	1576.4
125°	1708.5	1734.7	1726.3	1716.9	1713.7
127.5°	1837.5	1870.0	1858.5	1845.9	1837.5
130°	1958.1	1995.9	1990.6	1984.3	1972.8
132.5°	2093.4	2122.8	2124.9	2110.2	2101.8
135°	2209.8	2242.3	2248.6	2245.5	2237.1
137.5°	2339.9	2366.1	2371.3	2369.2	2356.7
140°	2454.2	2480.4	2495.1	2495.1	2483.6
142.5°	2571.7	2597.9	2606.3	2609.4	2597.9
145°	2682.8	2703.8	2720.6	2723.7	2712.2
147.5°	2782.5	2808.7	2821.3	2826.5	2815.0
150°	2885.3	2903.1	2914.6	2924.1	2914.6
152.5°	2976.5	2994.3	3009.0	3020.6	3009.0
155°	3067.8	3076.1	3085.6	3100.3	3090.8
157.5°	3146.4	3152.7	3157.9	3178.9	3164.2
160°	3216.7	3223.0	3226.1	3244.0	3231.4
162.5°	3281.7	3281.7	3284.9	3304.8	3290.1
165°	3337.3	3334.1	3334.1	3355.1	3340.4
167.5°	3387.6	3378.2	3378.2	3399.2	3384.5
170°	3425.4	3417.0	3413.9	3434.8	3417.0
172.5°	3451.6	3443.2	3440.1	3461.1	3443.2
175°	3472.6	3464.2	3457.9	3478.9	3461.1
177.5°	3484.1	3475.7	3469.4	3487.3	3469.4
180°	3478.9	3478.9	3478.9	3478.9	3478.9

TEST NUMBER: P907370

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.18	8.95	9.24	10.00	11.44	7.75	8.51	8.81	9.57	11.01
	3H	9.84	10.52	10.90	11.59	13.04	9.36	10.05	10.43	11.11	12.57
	4H	10.42	11.07	11.49	12.13	13.59	9.95	10.59	11.02	11.66	13.12
	6H	10.81	11.41	11.90	12.48	13.95	10.34	10.93	11.42	12.01	13.48
	8H	10.91	11.48	12.00	12.57	14.04	10.44	11.01	11.53	12.10	13.56
	12H	10.96	11.50	12.05	12.58	14.07	10.48	11.02	11.57	12.10	13.59
4H	2H	8.63	9.28	9.71	10.35	11.81	8.29	8.94	9.37	10.01	11.46
	3H	10.49	11.03	11.58	12.13	13.60	10.10	10.64	11.19	11.73	13.20
	4H	11.20	11.70	12.29	12.78	14.27	10.79	11.29	11.89	12.38	13.87
	6H	11.71	12.13	12.81	13.24	14.73	11.30	11.73	12.40	12.83	14.32
	8H	11.86	12.25	12.96	13.36	14.86	11.44	11.84	12.55	12.94	14.45
	12H	11.92	12.28	13.04	13.40	14.91	11.50	11.86	12.62	12.98	14.48
8H	4H	11.39	11.79	12.49	12.89	14.39	11.03	11.43	12.13	12.53	14.03
	6H	12.01	12.34	13.14	13.49	14.99	11.65	11.98	12.78	13.12	14.62
	8H	12.23	12.52	13.37	13.65	15.17	11.87	12.15	13.00	13.28	14.80
	12H	12.36	12.61	13.50	13.74	15.29	11.98	12.23	13.11	13.35	14.91
12H	4H	11.37	11.73	12.49	12.84	14.35	11.02	11.38	12.14	12.49	14.00
	6H	12.04	12.33	13.17	13.46	14.98	11.69	11.98	12.82	13.11	14.62
	8H	12.28	12.53	13.42	13.66	15.21	11.92	12.18	13.06	13.30	14.85

END OF REPORT