

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907375

Luminaire Tested: DFN2DIP-TR4F0-060D120US835-FLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P907375  
REPORT IS A COMBINATION OF REPORTS P902037 AND P898849  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-060D120US835-FLLONL  
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 17820.0 lumens  
Efficiency: N/A  
Efficacy: 123.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 144.7  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9781  
Total Harmonic Distortion (THDi): 0.075  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P907375  
CATALOG NUMBER: DFN2DIP-TR4F0-060D120US835-FLLONL

### Luminous Intensity Polar Plot

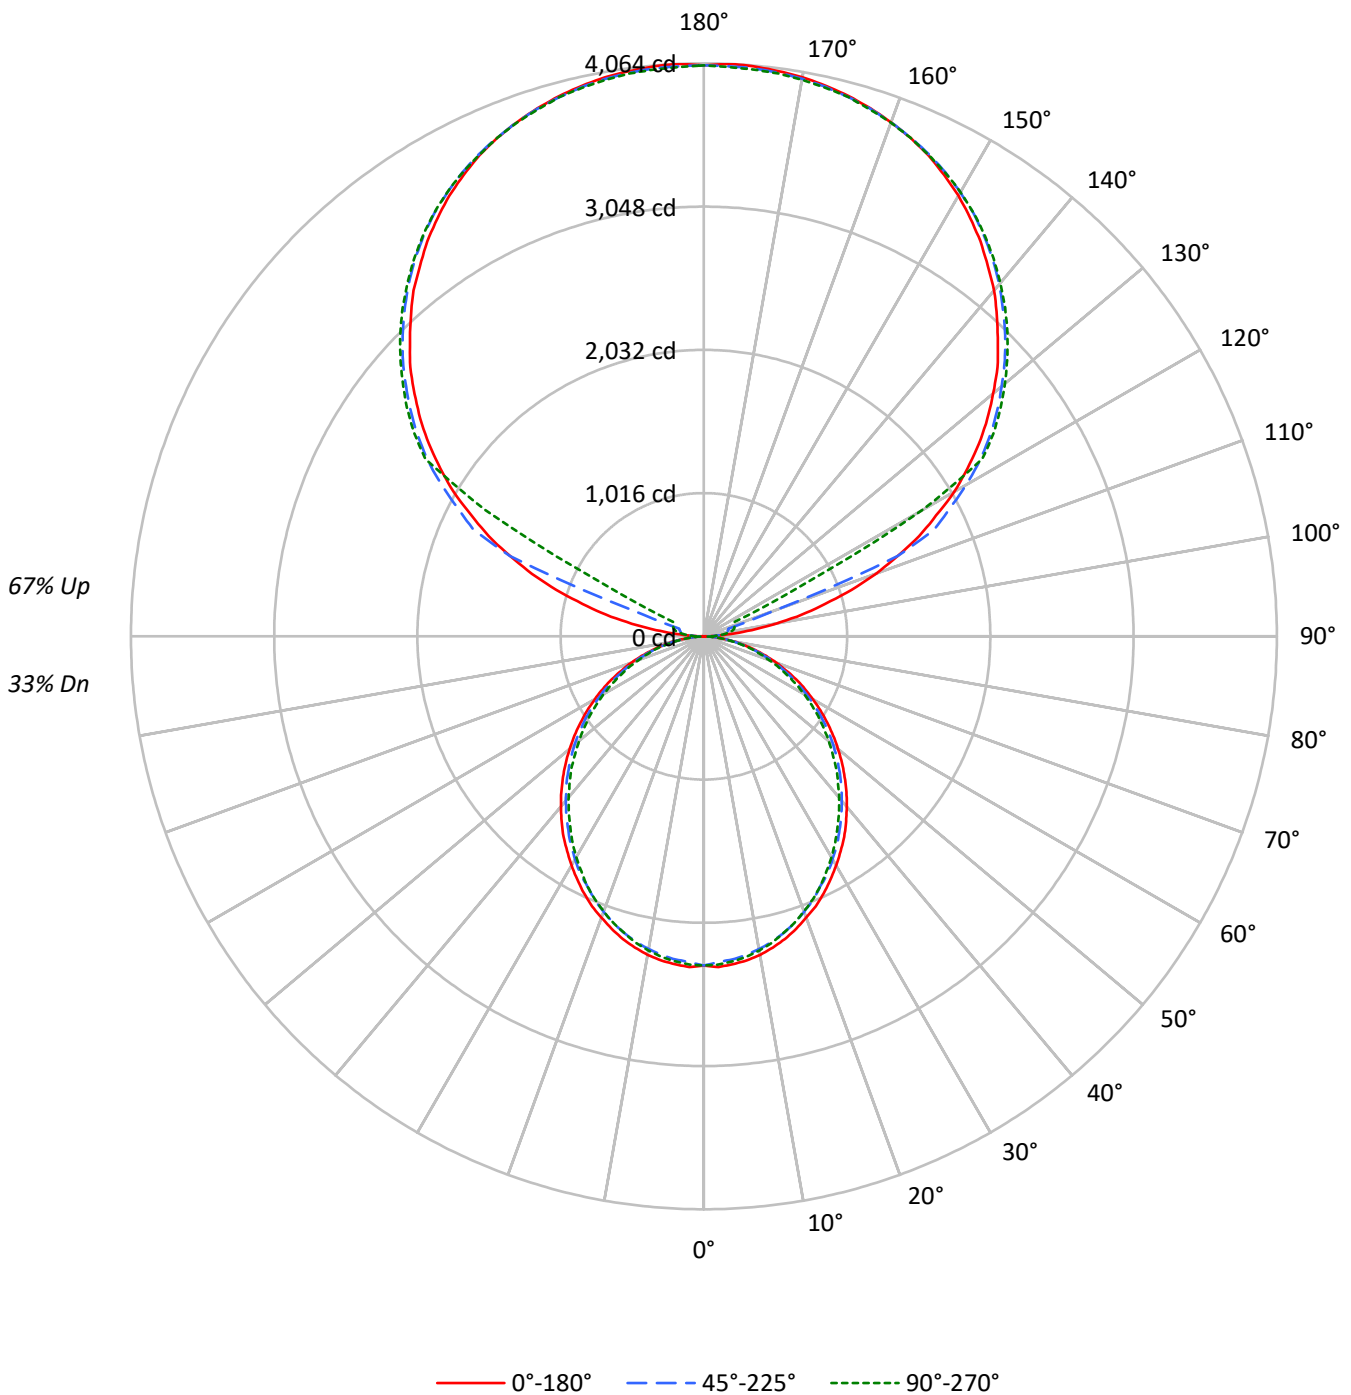



TEST NUMBER: P907375  
 CATALOG NUMBER: DFN2DIP-TR4F0-060D120US835-FLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33				33
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34	28				28
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29	24				24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25	20				20
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21	17				17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18	15				15
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16	13				13
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14	12				12
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10				10
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12	9				9
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11	9				9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1855	1855	1855
5°	1858	1829	1841
10°	1843	1804	1816
15°	1816	1774	1777
20°	1779	1733	1737
25°	1743	1684	1691
30°	1697	1638	1632
35°	1654	1584	1570
40°	1600	1529	1511
45°	1547	1474	1451
50°	1489	1417	1381
55°	1429	1350	1316
60°	1360	1271	1243
65°	1285	1189	1156
70°	1190	1089	1062
75°	1057	970	976
80°	899	817	811
85°	650	554	537

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 2150 cd/sqm



TEST NUMBER: P907375

CATALOG NUMBER: DFN2DIP-TR4F0-060D120US835-FLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	219.7	1.2
10°-20°	618.3	3.5
20°-30°	908.6	5.1
30°-40°	1055.3	5.9
40°-50°	1054.0	5.9
50°-60°	919.0	5.2
60°-70°	679.4	3.8
70°-80°	384.4	2.2
80°-90°	108.6	0.6
90°-100°	133.5	0.7
100°-110°	497.8	2.8
110°-120°	1320.3	7.4
120°-130°	2189.8	12.3
130°-140°	2326.1	13.1
140°-150°	2161.8	12.1
150°-160°	1738.1	9.8
160°-170°	1119.9	6.3
170°-180°	385.5	2.2
0°-30°	1746.6	9.8
0°-40°	2801.8	15.7
0°-60°	4774.8	26.8
0°-90°	5947.1	33.4
90°-120°	1951.7	11.0
90°-150°	8629.4	48.4
90°-180°	11873.0	66.6
0°-180°	17820.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2335	2335	2335	2335	2335	
5°	2335	2326	2301	2319	2315	222
15°	2222	2209	2180	2189	2178	626
25°	2011	1994	1955	1960	1955	926
35°	1735	1713	1677	1663	1652	1084
45°	1412	1396	1363	1338	1329	1090
55°	1069	1055	1028	1001	990	955
65°	721	707	685	664	653	713
75°	377	373	361	348	352	402
85°	92	90	88	81	79	103
90°	3	35	58	73	79	16
95°	190	94	114	129	126	225
105°	891	979	179	211	223	952
115°	1685	1735	1808	451	240	1659
125°	2382	2421	2476	2497	2506	2125
135°	2948	2995	3021	3051	3045	2277
145°	3420	3417	3467	3487	3472	2139
155°	3766	3739	3775	3792	3769	1735
165°	3968	3950	3959	3980	3959	1121
175°	4058	4038	4044	4064	4035	386
180°	4050	4050	4050	4050	4050	



TEST NUMBER: P907375

CATALOG NUMBER: DFN2DIP-TR4F0-060D120US835-FLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2334.6	2334.6	2334.6	2334.6	2334.6
2.5°	2348.2	2337.0	2312.2	2334.6	2330.3
5°	2334.6	2325.8	2301.0	2318.9	2314.6
7.5°	2318.9	2305.6	2280.8	2298.9	2294.4
10°	2294.4	2278.7	2251.7	2269.6	2262.9
12.5°	2260.6	2247.2	2220.3	2231.5	2227.0
15°	2222.4	2209.1	2179.8	2188.9	2177.7
17.5°	2175.3	2162.0	2132.7	2143.8	2132.7
20°	2123.6	2110.3	2078.8	2085.5	2076.7
22.5°	2072.2	2051.9	2022.6	2022.6	2018.1
25°	2011.4	1993.6	1955.4	1959.7	1955.4
27.5°	1944.0	1928.3	1899.2	1892.6	1881.4
30°	1876.9	1858.7	1825.2	1818.5	1809.4
32.5°	1804.9	1791.6	1755.6	1742.0	1733.0
35°	1735.4	1713.0	1677.0	1663.4	1652.2
37.5°	1656.8	1636.5	1600.6	1584.8	1573.6
40°	1576.0	1557.9	1522.0	1502.0	1492.9
42.5°	1497.4	1479.3	1443.6	1421.0	1407.6
45°	1412.2	1396.4	1362.6	1338.1	1329.0
47.5°	1329.0	1313.3	1277.4	1252.6	1239.2
50°	1241.4	1230.2	1198.8	1167.3	1156.1
52.5°	1156.1	1140.4	1111.3	1086.6	1070.9
55°	1068.7	1055.1	1028.2	1001.3	990.1
57.5°	981.1	969.9	940.6	913.7	904.6
60°	893.4	884.6	853.2	828.4	821.7
62.5°	808.1	792.4	770.0	747.6	738.6
65°	720.7	707.2	684.8	664.5	653.3
67.5°	630.9	619.5	599.5	583.8	574.7
70°	547.8	538.8	518.5	502.8	494.0
72.5°	462.5	453.5	442.3	426.6	419.9
75°	377.0	372.8	361.3	348.0	352.5
77.5°	300.8	291.8	287.2	280.6	273.9
80°	224.6	222.2	217.7	211.0	206.5
82.5°	152.7	152.7	150.5	141.5	141.5
85°	91.9	89.8	87.6	80.7	78.6
87.5°	40.5	36.0	31.4	24.8	22.4
90°	2.8	35.1	58.5	73.4	79.0
92.5°	73.4	61.6	70.3	76.2	79.0
95°	190.3	93.6	114.1	129.1	126.0
97.5°	342.8	102.7	149.3	158.3	161.1
100°	518.8	117.3	167.0	190.3	196.3
102.5°	712.0	706.4	172.9	205.0	214.0
105°	890.8	978.9	178.9	210.9	222.7
107.5°	1098.9	1172.0	184.8	216.8	228.6
110°	1298.3	1359.6	512.9	219.9	231.4



TEST NUMBER: P907375

CATALOG NUMBER: DFN2DIP-TR4F0-060D120US835-FLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1485.9	1538.4	1488.7	225.5	234.5
115°	1684.9	1734.7	1808.1	451.3	240.5
117.5°	1857.9	1916.4	1966.5	1547.1	779.5
120°	2051.4	2095.2	2148.1	2183.3	1787.6
122.5°	2215.3	2262.3	2321.1	2338.5	2341.6
125°	2382.3	2420.6	2476.3	2496.8	2505.5
127.5°	2534.7	2575.8	2620.0	2649.2	2652.0
130°	2678.4	2725.4	2757.4	2789.8	2787.0
132.5°	2824.9	2863.2	2895.2	2921.7	2918.9
135°	2948.1	2995.1	3021.2	3050.8	3044.9
137.5°	3076.9	3112.0	3141.6	3170.8	3162.1
140°	3202.9	3226.5	3258.5	3285.0	3270.4
142.5°	3308.6	3329.2	3367.1	3390.4	3375.8
145°	3420.0	3416.9	3466.6	3487.2	3472.5
147.5°	3516.4	3507.7	3557.5	3572.1	3560.6
150°	3610.3	3589.8	3636.8	3654.2	3639.6
152.5°	3689.3	3666.0	3709.9	3727.6	3707.1
155°	3765.5	3739.4	3774.6	3792.0	3768.7
157.5°	3827.1	3803.8	3830.3	3850.8	3827.1
160°	3880.0	3862.3	3880.0	3897.4	3876.9
162.5°	3926.7	3909.3	3923.9	3944.4	3918.0
165°	3967.7	3950.3	3959.0	3979.6	3959.0
167.5°	4000.1	3982.3	3991.4	4011.9	3985.5
170°	4026.5	4008.8	4014.7	4035.2	4008.8
172.5°	4043.9	4026.5	4032.5	4053.0	4026.5
175°	4058.5	4038.0	4043.9	4064.5	4035.2
177.5°	4064.5	4043.9	4047.1	4067.6	4041.2
180°	4049.9	4049.9	4049.9	4049.9	4049.9



TEST NUMBER: P907375  
 CATALOG NUMBER: DFN2DIP-TR4F0-060D120US835-FLLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.64	8.37	8.73	9.46	10.95	7.21	7.94	8.30	9.02	10.52
	3H	9.29	9.94	10.39	11.04	12.55	8.82	9.47	9.91	10.57	12.07
	4H	9.87	10.49	10.98	11.59	13.10	9.40	10.02	10.51	11.12	12.63
	6H	10.26	10.83	11.38	11.93	13.46	9.79	10.36	10.91	11.46	12.98
	8H	10.36	10.91	11.48	12.02	13.54	9.89	10.43	11.01	11.55	13.07
	12H	10.41	10.92	11.53	12.03	13.58	9.93	10.44	11.05	11.55	13.10
4H	2H	8.09	8.71	9.20	9.80	11.32	7.74	8.36	8.86	9.46	10.97
	3H	9.94	10.46	11.06	11.58	13.11	9.55	10.06	10.67	11.19	12.71
	4H	10.65	11.12	11.77	12.24	13.78	10.24	10.72	11.37	11.83	13.38
	6H	11.16	11.56	12.29	12.70	14.24	10.75	11.15	11.88	12.29	13.83
	8H	11.30	11.68	12.43	12.81	14.36	10.89	11.27	12.02	12.40	13.95
	12H	11.37	11.71	12.52	12.85	14.41	10.95	11.29	12.10	12.43	13.99
8H	4H	10.83	11.21	11.97	12.34	13.90	10.47	10.85	11.61	11.98	13.54
	6H	11.46	11.77	12.61	12.94	14.49	11.10	11.41	12.25	12.58	14.13
	8H	11.68	11.95	12.84	13.10	14.67	11.31	11.58	12.47	12.73	14.31
	12H	11.80	12.05	12.97	13.19	14.80	11.42	11.66	12.58	12.81	14.41
12H	4H	10.81	11.16	11.96	12.30	13.86	10.46	10.81	11.61	11.95	13.51
	6H	11.49	11.76	12.65	12.91	14.48	11.14	11.41	12.30	12.56	14.13
	8H	11.72	11.97	12.89	13.11	14.72	11.37	11.61	12.53	12.75	14.36