

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907513

Luminaire Tested: DFN2DIP-TR4F0-100D100US835-RLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P907513  
REPORT IS A COMBINATION OF REPORTS P902010 AND P898849  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-100D100US835-RLLONL  
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 18400.0 lumens  
Efficiency: N/A  
Efficacy: 103.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 177.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9972  
Total Harmonic Distortion (THDi): 0.128  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P907513  
CATALOG NUMBER: DFN2DIP-TR4F0-100D100US835-RLLONL

### Luminous Intensity Polar Plot

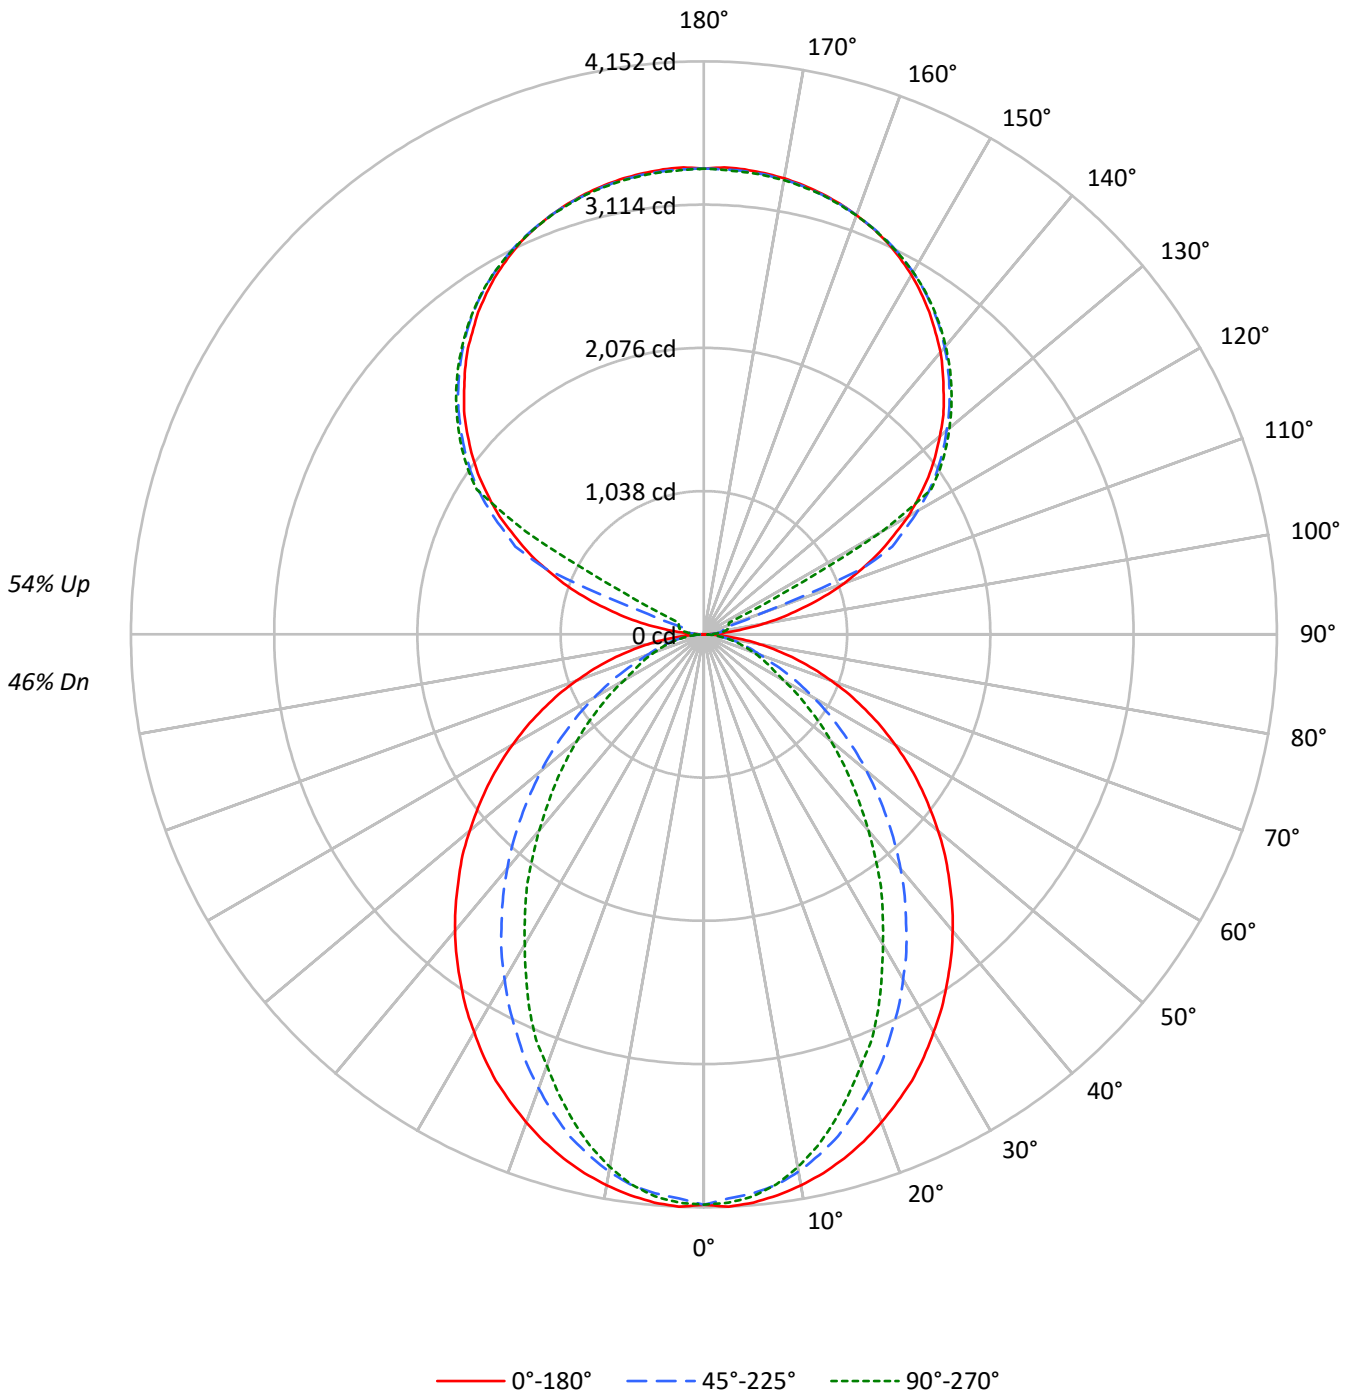



TEST NUMBER: P907513

CATALOG NUMBER: DFN2DIP-TR4F0-100D100US835-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40			40
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39	34			34
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34	29			29
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29	26			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16			16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17	15			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15	13			13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3283	3283	3283
5°	3289	3231	3252
10°	3256	3168	3146
15°	3211	3063	2982
20°	3152	2919	2781
25°	3091	2757	2588
30°	3010	2591	2342
35°	2930	2413	2126
40°	2849	2228	1878
45°	2754	2023	1653
50°	2657	1817	1434
55°	2555	1596	1224
60°	2437	1365	1007
65°	2301	1130	906
70°	2136	911	820
75°	1930	803	746
80°	1630	674	646
85°	1136	449	485

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2754 cd/sqm



TEST NUMBER: P907513

CATALOG NUMBER: DFN2DIP-TR4F0-100D100US835-RLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	387.3	2.1
10°-20°	1063.3	5.8
20°-30°	1492.9	8.1
30°-40°	1627.4	8.8
40°-50°	1495.7	8.1
50°-60°	1174.7	6.4
60°-70°	764.6	4.2
70°-80°	393.6	2.1
80°-90°	106.4	0.6
90°-100°	111.3	0.6
100°-110°	414.9	2.3
110°-120°	1100.3	6.0
120°-130°	1824.9	9.9
130°-140°	1938.4	10.5
140°-150°	1801.5	9.8
150°-160°	1448.4	7.9
160°-170°	933.3	5.1
170°-180°	321.2	1.7
0°-30°	2943.6	16.0
0°-40°	4571.0	24.8
0°-60°	7241.3	39.4
0°-90°	8505.9	46.2
90°-120°	1626.4	8.8
90°-150°	7191.2	39.1
90°-180°	9894.0	53.8
0°-180°	18400.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4133	4133	4133	4133	4133	
5°	4133	4114	4066	4099	4088	392
15°	3931	3890	3763	3692	3654	1108
25°	3568	3448	3202	3048	2992	1641
35°	3075	2884	2555	2319	2236	1924
45°	2514	2263	1870	1604	1515	1941
55°	1911	1620	1216	991	920	1708
65°	1290	987	651	524	512	1279
75°	688	426	299	273	269	728
85°	161	82	71	71	71	184
90°	2	29	49	61	66	17
95°	159	78	95	108	105	188
105°	742	816	149	176	186	793
115°	1404	1446	1507	376	200	1382
125°	1985	2017	2064	2081	2088	1771
135°	2457	2496	2518	2542	2537	1898
145°	2850	2847	2889	2906	2894	1782
155°	3138	3116	3146	3160	3141	1446
165°	3306	3292	3299	3316	3299	934
175°	3382	3365	3370	3387	3363	322
180°	3375	3375	3375	3375	3375	



TEST NUMBER: P907513

CATALOG NUMBER: DFN2DIP-TR4F0-100D100US835-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4133.0	4133.0	4133.0	4133.0	4133.0
2.5°	4151.6	4133.0	4091.7	4129.4	4121.9
5°	4133.0	4114.3	4065.5	4099.3	4088.1
7.5°	4099.3	4077.0	4024.6	4039.3	4020.7
10°	4054.4	4028.2	3953.6	3942.1	3919.9
12.5°	3998.5	3964.7	3863.5	3841.3	3800.0
15°	3931.0	3889.7	3762.7	3691.7	3654.4
17.5°	3852.4	3792.5	3635.4	3553.2	3493.3
20°	3762.7	3687.7	3500.8	3407.6	3325.0
22.5°	3665.5	3579.4	3362.3	3235.4	3179.4
25°	3568.3	3448.5	3201.6	3048.4	2992.1
27.5°	3452.4	3325.0	3052.0	2876.2	2790.1
30°	3329.0	3186.5	2887.3	2696.9	2595.7
32.5°	3209.2	3036.9	2730.6	2506.0	2412.3
35°	3074.6	2883.8	2554.8	2319.1	2236.5
37.5°	2943.7	2737.7	2390.1	2131.8	2038.5
40°	2805.2	2581.0	2217.9	1952.4	1855.2
42.5°	2663.1	2423.8	2046.1	1769.1	1675.8
45°	2513.5	2262.7	1870.3	1604.4	1514.7
47.5°	2371.5	2106.0	1702.0	1436.1	1354.0
50°	2214.3	1948.8	1537.3	1279.0	1200.8
52.5°	2060.7	1780.2	1380.2	1133.3	1062.3
55°	1911.1	1619.5	1215.5	991.3	920.2
57.5°	1758.0	1458.7	1069.9	860.3	800.4
60°	1600.8	1301.6	916.3	725.8	665.9
62.5°	1447.6	1148.4	785.3	606.0	576.2
65°	1290.5	987.3	650.8	523.8	512.3
67.5°	1140.9	837.7	523.8	459.9	448.8
70°	983.7	692.1	433.7	396.4	381.4
72.5°	834.1	557.1	362.7	332.9	325.4
75°	688.1	426.2	299.2	273.0	269.4
77.5°	542.5	302.8	235.7	220.6	213.1
80°	407.5	217.1	179.4	164.7	164.7
82.5°	284.1	146.0	123.4	115.9	115.9
85°	160.7	82.1	71.0	71.0	71.0
87.5°	59.9	29.8	29.8	26.2	26.2
90°	2.3	29.3	48.7	61.2	65.8
92.5°	61.2	51.3	58.6	63.5	65.8
95°	158.6	78.0	95.1	107.6	105.0
97.5°	285.6	85.5	124.4	131.9	134.3
100°	432.4	97.7	139.2	158.6	163.6
102.5°	593.3	588.7	144.1	170.8	178.3
105°	742.4	815.7	149.1	175.7	185.6
107.5°	915.8	976.7	154.0	180.7	190.5
110°	1081.9	1133.0	427.4	183.3	192.8



TEST NUMBER: P907513

CATALOG NUMBER: DFN2DIP-TR4F0-100D100US835-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1238.2	1282.0	1240.6	187.9	195.5
115°	1404.1	1445.6	1506.8	376.1	200.4
117.5°	1548.2	1597.0	1638.7	1289.3	649.6
120°	1709.5	1746.0	1790.1	1819.4	1489.7
122.5°	1846.1	1885.2	1934.2	1948.7	1951.3
125°	1985.3	2017.2	2063.6	2080.7	2087.9
127.5°	2112.3	2146.5	2183.3	2207.7	2210.0
130°	2232.0	2271.2	2297.9	2324.8	2322.5
132.5°	2354.1	2386.0	2412.7	2434.7	2432.4
135°	2456.8	2495.9	2517.7	2542.3	2537.4
137.5°	2564.1	2593.4	2618.0	2642.4	2635.1
140°	2669.0	2688.8	2715.4	2737.5	2725.3
142.5°	2757.2	2774.3	2805.9	2825.3	2813.2
145°	2850.0	2847.4	2888.9	2906.0	2893.8
147.5°	2930.3	2923.1	2964.5	2976.7	2967.2
150°	3008.6	2991.5	3030.7	3045.2	3033.0
152.5°	3074.4	3055.0	3091.6	3106.3	3089.2
155°	3138.0	3116.2	3145.5	3160.0	3140.6
157.5°	3189.3	3169.9	3191.9	3209.0	3189.3
160°	3233.4	3218.6	3233.4	3247.9	3230.8
162.5°	3272.2	3257.7	3269.9	3287.0	3265.0
165°	3306.4	3291.9	3299.2	3316.3	3299.2
167.5°	3333.4	3318.6	3326.2	3343.3	3321.2
170°	3355.4	3340.7	3345.6	3362.7	3340.7
172.5°	3369.9	3355.4	3360.4	3377.5	3355.4
175°	3382.1	3365.0	3369.9	3387.1	3362.7
177.5°	3387.1	3369.9	3372.6	3389.7	3367.6
180°	3374.9	3374.9	3374.9	3374.9	3374.9



TEST NUMBER: P907513  
 CATALOG NUMBER: DFN2DIP-TR4F0-100D100US835-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.91	11.71	11.90	12.71	14.04	6.88	7.68	7.88	8.69	10.01
	3H	12.58	13.30	13.59	14.31	15.66	8.07	8.79	9.08	9.80	11.14
	4H	13.19	13.87	14.21	14.88	16.24	8.52	9.20	9.54	10.21	11.57
	6H	13.61	14.23	14.64	15.25	16.62	8.84	9.46	9.87	10.48	11.85
	8H	13.74	14.33	14.77	15.36	16.73	8.93	9.52	9.96	10.56	11.92
	12H	13.80	14.36	14.84	15.39	16.78	8.97	9.54	10.01	10.57	11.95
4H	2H	10.92	11.60	11.95	12.62	13.97	7.47	8.15	8.50	9.17	10.52
	3H	12.75	13.31	13.78	14.36	15.73	8.82	9.39	9.86	10.43	11.80
	4H	13.44	13.96	14.48	14.99	16.38	9.37	9.88	10.41	10.92	12.31
	6H	13.95	14.40	15.00	15.45	16.84	9.79	10.23	10.84	11.29	12.68
	8H	14.13	14.54	15.18	15.59	16.99	9.92	10.33	10.97	11.38	12.78
	12H	14.22	14.59	15.29	15.66	17.07	9.98	10.35	11.05	11.42	12.83
8H	4H	13.41	13.82	14.46	14.87	16.27	9.65	10.06	10.70	11.11	12.51
	6H	13.97	14.31	15.05	15.41	16.80	10.17	10.51	11.24	11.60	13.00
	8H	14.19	14.49	15.27	15.56	16.98	10.36	10.66	11.44	11.73	13.15
	12H	14.33	14.59	15.41	15.66	17.12	10.48	10.74	11.56	11.81	13.27
12H	4H	13.36	13.73	14.43	14.80	16.20	9.65	10.02	10.72	11.09	12.50
	6H	13.95	14.25	15.03	15.32	16.74	10.22	10.51	11.30	11.59	13.01
	8H	14.17	14.43	15.25	15.50	16.96	10.43	10.69	11.51	11.76	13.22