

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910008

Luminaire Tested: DFN2DIP-TR4F0-040D060US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910008
REPORT IS A COMBINATION OF REPORTS P900406 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D060US840-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8795.9 lumens
Efficiency: N/A
Efficacy: 114.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 76.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910008

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US840-RLLFLL

Luminous Intensity Polar Plot

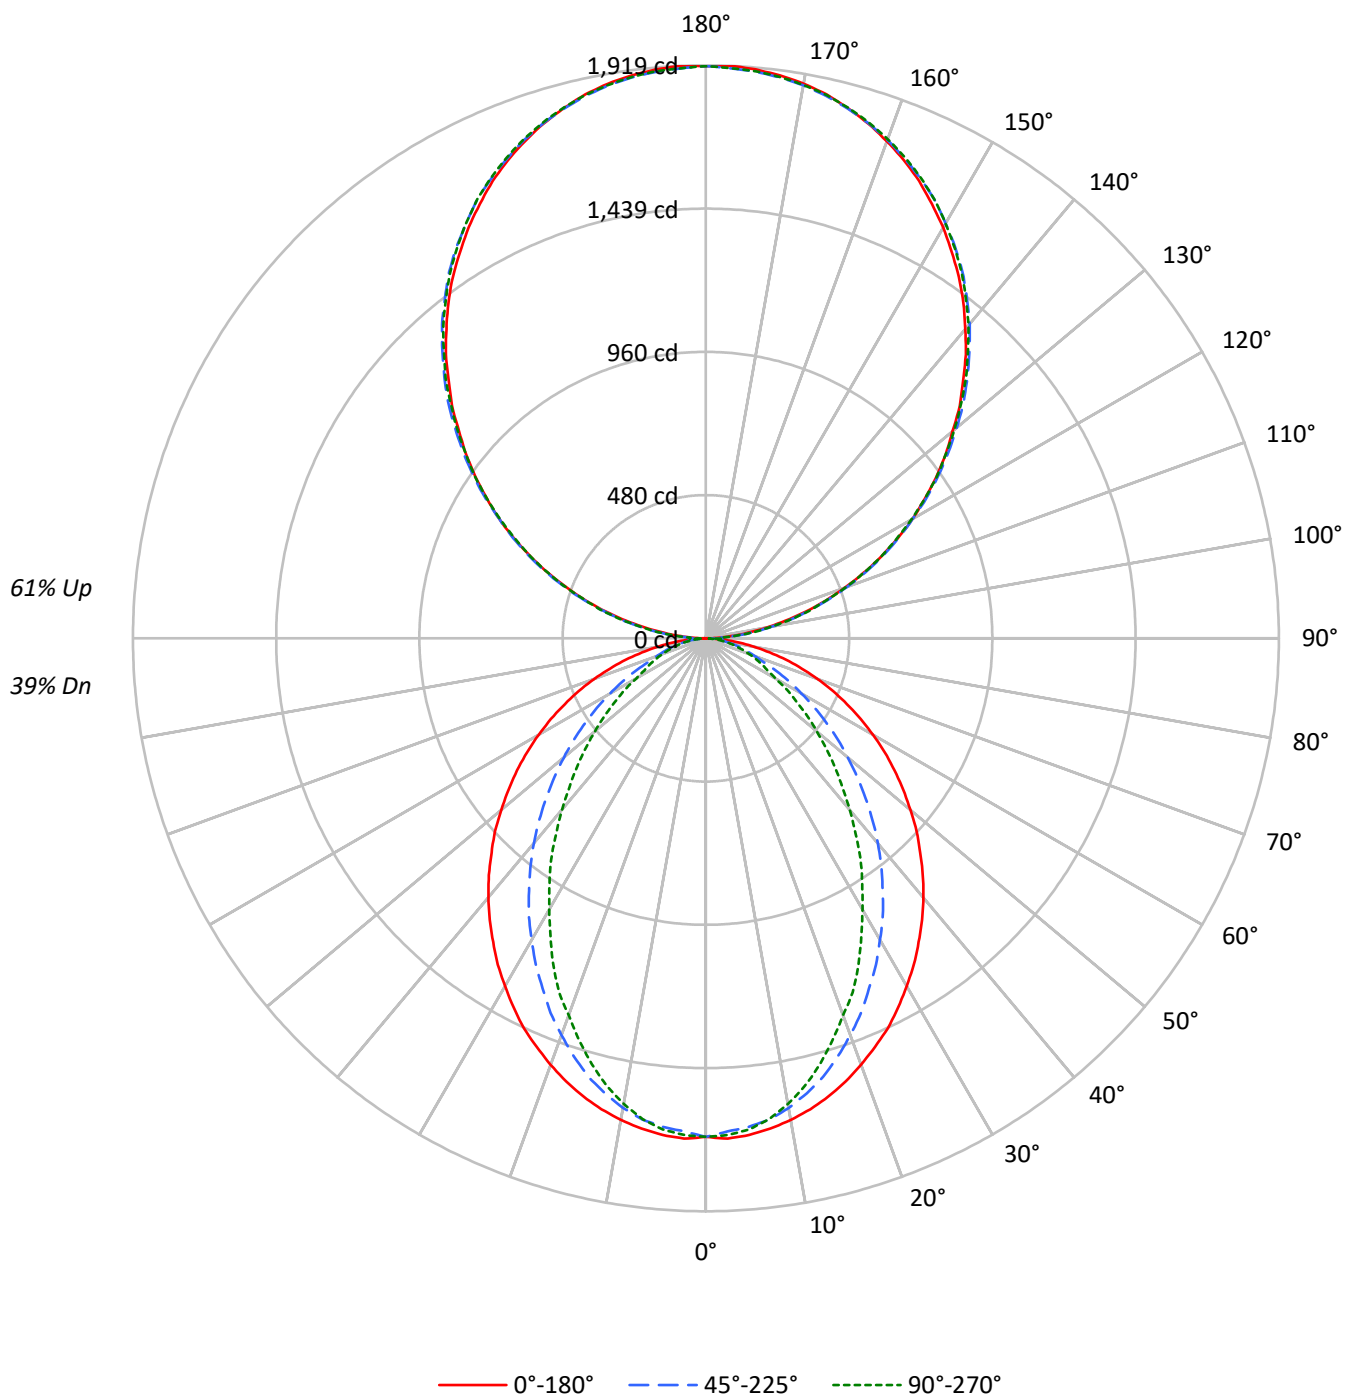

TEST NUMBER: P910008

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46
1	96	92	88	85	87	83	80	78	68	66	64	54	53	51	41	40	40
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29
4	73	63	55	50	66	58	51	46	48	43	39	38	35	32	30	27	26
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	24	22
6	62	51	43	37	56	46	40	35	39	33	30	31	28	25	25	22	20
7	57	46	38	33	52	42	35	30	35	30	26	29	25	22	22	20	18
8	53	41	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1326	1326	1326
5°	1328	1305	1314
10°	1315	1280	1271
15°	1297	1237	1205
20°	1273	1179	1124
25°	1249	1114	1045
30°	1216	1047	946
35°	1184	975	859
40°	1151	900	759
45°	1113	817	668
50°	1073	734	579
55°	1032	645	494
60°	984	551	407
65°	930	456	366
70°	863	368	331
75°	779	324	301
80°	659	272	261
85°	459	182	196

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1491 cd/sqm

TEST NUMBER: P910008

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US840-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.5	1.8
10°-20°	429.5	4.9
20°-30°	603.0	6.9
30°-40°	657.4	7.5
40°-50°	604.2	6.9
50°-60°	474.5	5.4
60°-70°	308.9	3.5
70°-80°	159.0	1.8
80°-90°	46.0	0.5
90°-100°	118.6	1.3
100°-110°	376.8	4.3
110°-120°	644.8	7.3
120°-130°	848.0	9.6
130°-140°	951.8	10.8
140°-150°	933.4	10.6
150°-160°	783.0	8.9
160°-170°	519.2	5.9
170°-180°	181.5	2.1
0°-30°	1189.0	13.5
0°-40°	1846.4	21.0
0°-60°	2925.1	33.3
0°-90°	3439.0	39.1
90°-120°	1140.1	13.0
90°-150°	3873.3	44.0
90°-180°	5357.0	60.9
0°-180°	8795.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1670	1670	1670	1670	1670	
5°	1670	1662	1642	1656	1651	158
15°	1588	1571	1520	1491	1476	447
25°	1441	1393	1293	1231	1209	663
35°	1242	1165	1032	937	903	777
45°	1015	914	756	648	612	784
55°	772	654	491	400	372	690
65°	521	399	263	212	207	517
75°	278	172	121	110	109	294
85°	65	33	29	29	29	75
90°	2	21	57	53	55	9
95°	84	100	103	103	100	94
105°	348	352	356	359	359	367
115°	647	656	653	652	647	640
125°	941	956	951	946	944	841
135°	1217	1235	1239	1237	1232	941
145°	1478	1489	1499	1500	1494	923
155°	1690	1694	1700	1708	1702	778
165°	1838	1836	1836	1848	1840	519
175°	1913	1908	1905	1916	1906	182
180°	1916	1916	1916	1916	1916	

TEST NUMBER: P910008

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US840-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1669.5	1669.5	1669.5	1669.5	1669.5
2.5°	1677.1	1669.5	1652.8	1668.1	1665.0
5°	1669.5	1661.9	1642.2	1655.9	1651.4
7.5°	1655.9	1646.9	1625.8	1631.6	1624.2
10°	1637.8	1627.2	1597.0	1592.4	1583.5
12.5°	1615.2	1601.5	1560.6	1551.7	1535.0
15°	1587.9	1571.2	1519.9	1491.3	1476.2
17.5°	1556.2	1532.0	1468.4	1435.3	1411.1
20°	1519.9	1489.7	1414.1	1376.4	1343.1
22.5°	1480.7	1445.9	1358.2	1306.9	1284.3
25°	1441.4	1393.0	1293.2	1231.4	1208.6
27.5°	1394.6	1343.1	1232.8	1161.9	1127.0
30°	1344.7	1287.2	1166.3	1089.3	1048.5
32.5°	1296.4	1226.8	1103.0	1012.3	974.4
35°	1242.0	1164.9	1032.0	936.8	903.4
37.5°	1189.1	1105.9	965.4	861.1	823.4
40°	1133.2	1042.6	896.0	788.7	749.4
42.5°	1075.7	979.1	826.5	714.6	676.9
45°	1015.3	914.0	755.5	648.1	611.9
47.5°	958.0	850.7	687.5	580.2	546.9
50°	894.4	787.2	621.0	516.6	485.0
52.5°	832.4	719.1	557.5	457.8	429.1
55°	772.0	654.2	491.0	400.4	371.7
57.5°	710.1	589.3	432.1	347.5	323.4
60°	646.6	525.7	370.1	293.2	269.0
62.5°	584.8	463.9	317.2	244.8	232.8
65°	521.3	398.8	262.9	211.6	206.9
67.5°	460.9	338.4	211.6	185.8	181.3
70°	397.4	279.5	175.2	160.2	154.0
72.5°	337.0	225.1	146.5	134.5	131.5
75°	277.9	172.2	120.9	110.3	108.9
77.5°	219.1	122.3	95.2	89.2	86.0
80°	164.6	87.7	72.4	66.6	66.6
82.5°	114.8	59.0	49.9	46.8	46.8
85°	64.9	33.2	28.7	28.7	28.7
87.5°	24.2	12.0	12.0	10.6	10.6
90°	1.7	20.8	56.7	53.1	54.8
92.5°	35.9	48.6	50.3	52.0	52.0
95°	84.3	100.5	103.4	103.4	100.5
97.5°	140.4	155.4	161.8	161.8	161.8
100°	205.1	218.3	223.0	223.0	221.3
102.5°	273.3	283.1	289.4	291.1	289.4
105°	347.8	352.4	355.9	358.8	358.8
107.5°	421.7	428.7	428.7	429.8	421.7
110°	493.4	502.6	502.6	502.6	498.0

TEST NUMBER: P910008

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	570.8	580.6	578.9	574.2	570.8
115°	647.0	656.3	653.4	651.7	647.0
117.5°	722.8	735.5	727.3	722.8	718.1
120°	799.0	811.7	799.0	799.0	793.8
122.5°	868.3	884.4	876.4	871.8	868.3
125°	941.1	955.5	950.9	945.7	944.0
127.5°	1012.2	1030.1	1023.7	1016.8	1012.2
130°	1078.6	1099.4	1096.5	1093.1	1086.7
132.5°	1153.2	1169.3	1170.4	1162.4	1157.7
135°	1217.3	1235.2	1238.6	1236.9	1232.2
137.5°	1288.9	1303.3	1306.3	1305.0	1298.2
140°	1351.9	1366.3	1374.4	1374.4	1368.1
142.5°	1416.5	1431.0	1435.6	1437.3	1431.0
145°	1477.8	1489.3	1498.6	1500.4	1494.0
147.5°	1532.7	1547.1	1554.1	1556.9	1550.5
150°	1589.3	1599.1	1605.5	1610.6	1605.5
152.5°	1639.5	1649.4	1657.5	1663.9	1657.5
155°	1689.8	1694.5	1699.6	1707.8	1702.5
157.5°	1733.1	1736.7	1739.5	1751.1	1743.0
160°	1771.9	1775.3	1777.1	1786.9	1780.0
162.5°	1807.7	1807.7	1809.4	1820.4	1812.3
165°	1838.3	1836.5	1836.5	1848.2	1840.1
167.5°	1866.0	1860.9	1860.9	1872.4	1864.3
170°	1886.8	1882.2	1880.5	1892.0	1882.2
172.5°	1901.3	1896.6	1894.9	1906.4	1896.6
175°	1912.8	1908.2	1904.7	1916.3	1906.4
177.5°	1919.1	1914.6	1911.1	1920.9	1911.1
180°	1916.3	1916.3	1916.3	1916.3	1916.3

TEST NUMBER: P910008

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.01	7.76	8.06	8.81	10.23	2.98	3.73	4.03	4.78	6.20
	3H	8.68	9.35	9.74	10.41	11.85	4.17	4.84	5.23	5.90	7.34
	4H	9.29	9.92	10.36	10.98	12.43	4.61	5.25	5.69	6.31	7.76
	6H	9.70	10.29	10.78	11.35	12.81	4.93	5.52	6.01	6.58	8.04
	8H	9.83	10.38	10.91	11.46	12.92	5.02	5.58	6.11	6.66	8.11
	12H	9.89	10.41	10.98	11.49	12.96	5.06	5.59	6.15	6.66	8.14
4H	2H	7.02	7.65	8.10	8.71	10.16	3.57	4.20	4.65	5.27	6.71
	3H	8.84	9.37	9.93	10.46	11.92	4.91	5.44	6.00	6.53	7.99
	4H	9.53	10.01	10.62	11.09	12.57	5.46	5.94	6.55	7.02	8.50
	6H	10.04	10.45	11.14	11.56	13.03	5.87	6.29	6.97	7.39	8.87
	8H	10.21	10.60	11.31	11.70	13.18	6.00	6.39	7.10	7.48	8.97
	12H	10.30	10.65	11.42	11.76	13.26	6.06	6.41	7.18	7.52	9.02
8H	4H	9.49	9.88	10.59	10.97	12.46	5.73	6.12	6.83	7.21	8.70
	6H	10.05	10.37	11.17	11.51	13.00	6.25	6.57	7.37	7.71	9.19
	8H	10.27	10.55	11.40	11.67	13.18	6.44	6.72	7.57	7.84	9.35
	12H	10.40	10.65	11.54	11.77	13.31	6.56	6.80	7.69	7.92	9.46
12H	4H	9.44	9.79	10.56	10.90	12.39	5.73	6.08	6.85	7.19	8.69
	6H	10.03	10.31	11.16	11.43	12.93	6.30	6.58	7.43	7.70	9.20
	8H	10.25	10.49	11.38	11.61	13.15	6.51	6.75	7.64	7.87	9.41