

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910054

Luminaire Tested: DFN2DIP-TR4F0-050D090US840-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P910054  
REPORT IS A COMBINATION OF REPORTS P900461 AND P897293  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-050D090US840-FLLFLL  
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 13042.4 lumens  
Efficiency: N/A  
Efficacy: 119.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 109.6  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.996  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P910054  
CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-FLLFLL

### Luminous Intensity Polar Plot

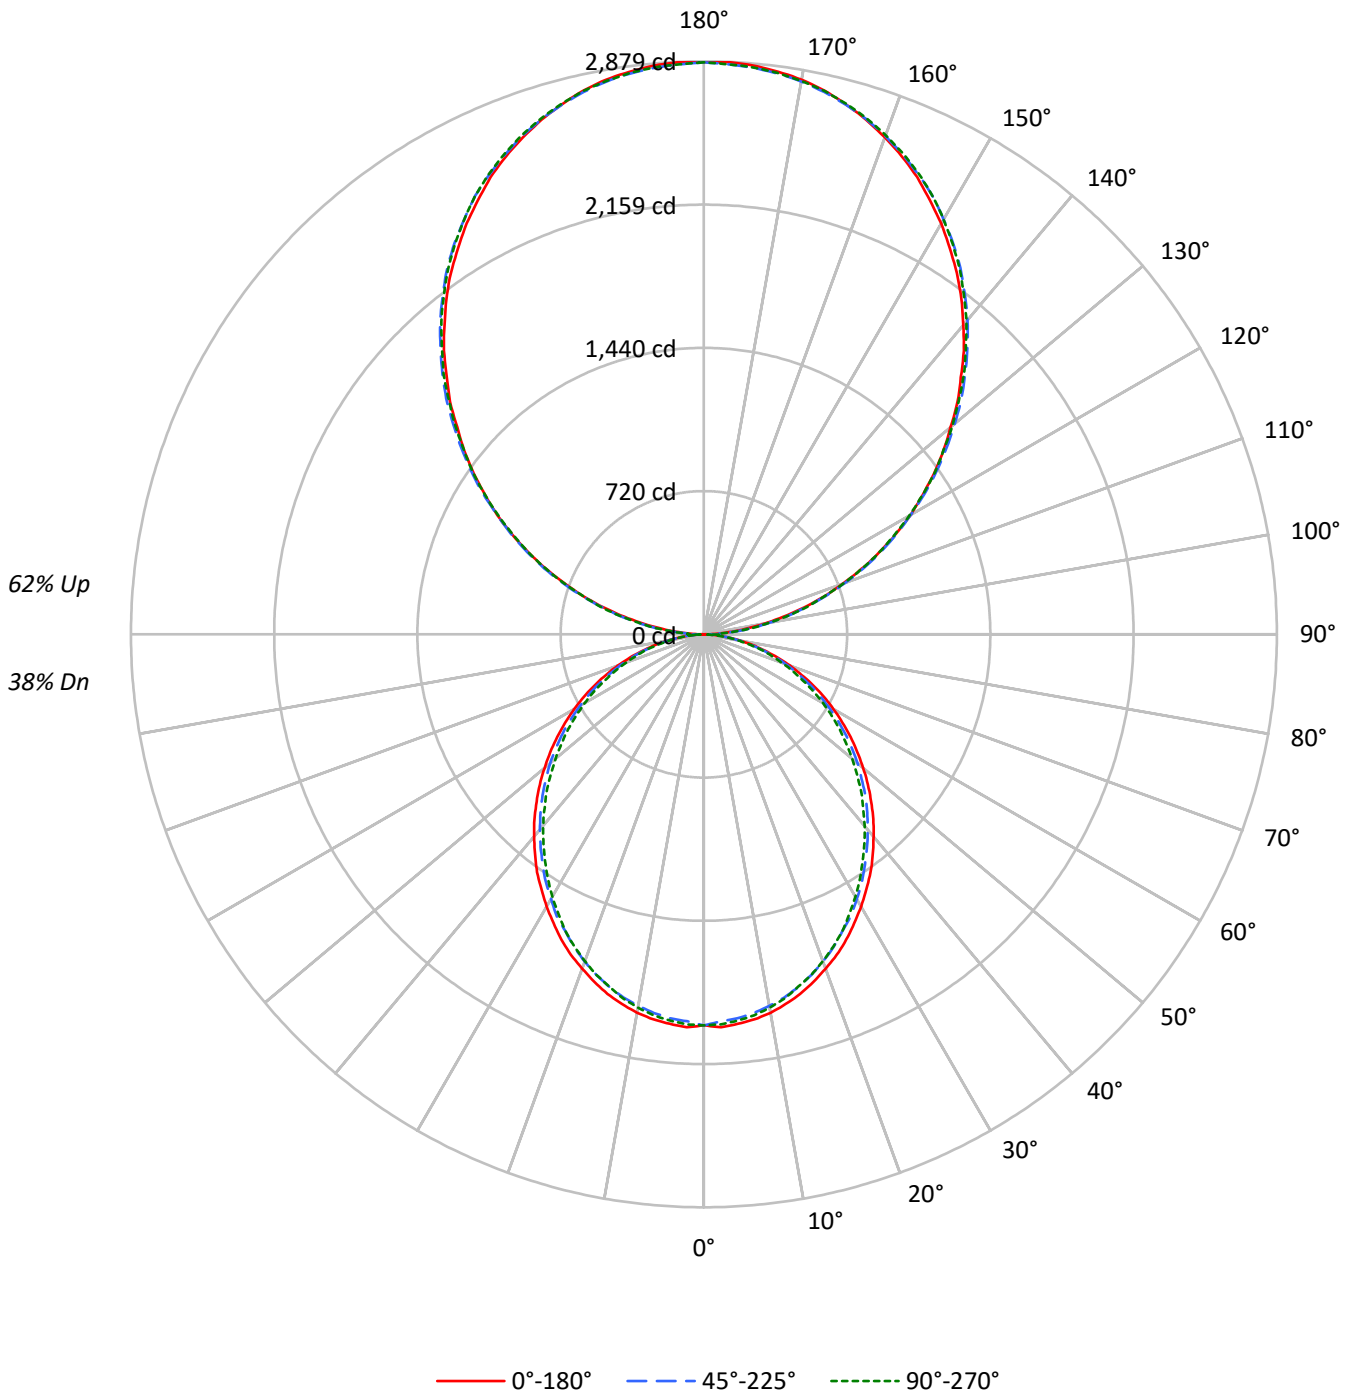



TEST NUMBER: P910054

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	45	45	45	38				38
1	95	91	87	84	86	83	79	77	67	65	63	53	52	50	40	39	38	32				32
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27				27
3	79	70	63	57	71	64	57	52	52	47	44	41	38	35	31	29	27	23				23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20				20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17				17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15				15
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16	13				13
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	16	14	12				12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11				11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	15	16	14	12	10				10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1561	1561	1561
5°	1563	1539	1549
10°	1551	1518	1528
15°	1528	1493	1496
20°	1497	1459	1462
25°	1466	1417	1423
30°	1428	1378	1374
35°	1392	1333	1322
40°	1347	1287	1272
45°	1302	1241	1221
50°	1253	1192	1162
55°	1202	1136	1108
60°	1144	1069	1046
65°	1081	1000	973
70°	1001	917	894
75°	890	816	821
80°	756	688	682
85°	547	466	452

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 2240 cd/sqm



TEST NUMBER: P910054

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	184.9	1.4
10°-20°	520.3	4.0
20°-30°	764.6	5.9
30°-40°	888.1	6.8
40°-50°	887.0	6.8
50°-60°	773.4	5.9
60°-70°	571.7	4.4
70°-80°	323.5	2.5
80°-90°	93.5	0.7
90°-100°	177.9	1.4
100°-110°	565.2	4.3
110°-120°	967.2	7.4
120°-130°	1272.0	9.8
130°-140°	1427.7	10.9
140°-150°	1400.0	10.7
150°-160°	1174.4	9.0
160°-170°	778.9	6.0
170°-180°	272.2	2.1
0°-30°	1469.8	11.3
0°-40°	2357.9	18.1
0°-60°	4018.3	30.8
0°-90°	5007.0	38.4
90°-120°	1710.2	13.1
90°-150°	5809.9	44.5
90°-180°	8035.0	61.6
0°-180°	13042.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1965	1965	1965	1965	1965	
5°	1965	1957	1936	1952	1948	187
15°	1870	1859	1834	1842	1833	527
25°	1693	1678	1646	1649	1646	779
35°	1460	1442	1411	1400	1390	912
45°	1188	1175	1147	1126	1118	917
55°	899	888	865	843	833	804
65°	606	595	576	559	550	600
75°	317	314	304	293	297	339
85°	77	76	74	68	66	86
90°	3	31	85	80	82	13
95°	126	151	155	155	151	141
105°	522	529	534	538	538	551
115°	971	984	980	978	971	960
125°	1412	1433	1426	1419	1416	1261
135°	1826	1853	1858	1855	1848	1411
145°	2217	2234	2248	2250	2241	1385
155°	2535	2542	2550	2562	2554	1167
165°	2757	2755	2755	2772	2760	778
175°	2869	2862	2857	2874	2860	273
180°	2874	2874	2874	2874	2874	



TEST NUMBER: P910054

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-FLLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1964.7	1964.7	1964.7	1964.7	1964.7
2.5°	1976.1	1966.7	1945.9	1964.7	1961.2
5°	1964.7	1957.3	1936.4	1951.5	1947.9
7.5°	1951.5	1940.3	1919.5	1934.7	1930.9
10°	1930.9	1917.6	1895.0	1910.0	1904.4
12.5°	1902.4	1891.2	1868.6	1877.9	1874.1
15°	1870.3	1859.1	1834.4	1842.1	1832.6
17.5°	1830.6	1819.4	1794.7	1804.1	1794.7
20°	1787.2	1775.9	1749.5	1755.0	1747.7
22.5°	1743.8	1726.8	1702.1	1702.1	1698.3
25°	1692.7	1677.7	1645.6	1649.2	1645.6
27.5°	1636.0	1622.8	1598.3	1592.7	1583.3
30°	1579.4	1564.3	1536.0	1530.4	1522.8
32.5°	1518.9	1507.7	1477.4	1466.0	1458.4
35°	1460.4	1441.6	1411.3	1399.9	1390.5
37.5°	1394.2	1377.3	1347.0	1333.7	1324.3
40°	1326.4	1311.1	1280.8	1263.9	1256.4
42.5°	1260.2	1245.0	1214.9	1195.8	1184.6
45°	1188.4	1175.2	1146.7	1126.1	1118.4
47.5°	1118.4	1105.2	1075.0	1054.1	1042.9
50°	1044.7	1035.3	1008.9	982.4	972.9
52.5°	972.9	959.7	935.2	914.4	901.2
55°	899.4	888.0	865.3	842.6	833.2
57.5°	825.6	816.2	791.5	768.9	761.2
60°	751.8	744.5	718.0	697.1	691.6
62.5°	680.1	666.9	648.0	629.1	621.6
65°	606.5	595.1	576.2	559.3	549.8
67.5°	531.0	521.4	504.5	491.3	483.6
70°	461.0	453.4	436.4	423.1	415.8
72.5°	389.3	381.6	372.2	359.0	353.4
75°	317.3	313.7	304.1	292.9	296.7
77.5°	253.2	245.5	241.8	236.1	230.6
80°	189.0	187.0	183.2	177.6	173.8
82.5°	128.5	128.5	126.6	119.1	119.1
85°	77.4	75.5	73.7	68.0	66.1
87.5°	34.0	30.3	26.5	20.8	18.9
90°	2.6	31.2	84.9	79.7	82.3
92.5°	53.7	72.8	75.4	78.0	78.0
95°	126.5	150.8	155.1	155.1	150.8
97.5°	210.6	233.1	242.7	242.7	242.7
100°	307.6	327.6	334.5	334.5	331.9
102.5°	409.9	424.6	434.1	436.8	434.1
105°	521.7	528.6	533.8	538.2	538.2
107.5°	632.6	643.0	643.0	644.7	632.6
110°	740.0	754.0	754.0	754.0	747.0



TEST NUMBER: P910054

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	856.2	870.9	868.3	861.4	856.2
115°	970.6	984.4	980.1	977.5	970.6
117.5°	1084.1	1103.2	1091.1	1084.1	1077.1
120°	1198.5	1217.5	1198.5	1198.5	1190.6
122.5°	1302.4	1326.8	1314.6	1307.7	1302.4
125°	1411.7	1433.3	1426.4	1418.6	1416.0
127.5°	1518.2	1545.1	1535.6	1525.2	1518.2
130°	1617.9	1649.1	1644.8	1639.5	1630.0
132.5°	1729.7	1753.9	1755.7	1743.5	1736.7
135°	1825.8	1852.7	1858.0	1855.3	1848.5
137.5°	1933.3	1955.0	1959.3	1957.6	1947.2
140°	2027.8	2049.4	2061.5	2061.5	2052.0
142.5°	2124.9	2146.5	2153.4	2156.1	2146.5
145°	2216.8	2234.0	2247.9	2250.5	2241.0
147.5°	2299.1	2320.7	2331.1	2335.4	2325.9
150°	2384.0	2398.7	2408.2	2416.0	2408.2
152.5°	2459.3	2474.1	2486.2	2495.8	2486.2
155°	2534.8	2541.6	2549.5	2561.6	2553.8
157.5°	2599.7	2604.9	2609.3	2626.6	2614.4
160°	2657.8	2663.0	2665.6	2680.3	2669.9
162.5°	2711.5	2711.5	2714.1	2730.6	2718.5
165°	2757.4	2754.8	2754.8	2772.2	2760.1
167.5°	2799.0	2791.3	2791.3	2808.5	2796.4
170°	2830.2	2823.3	2820.8	2838.0	2823.3
172.5°	2851.9	2845.0	2842.4	2859.7	2845.0
175°	2869.2	2862.3	2857.1	2874.5	2859.7
177.5°	2878.7	2871.9	2866.6	2881.3	2866.6
180°	2874.5	2874.5	2874.5	2874.5	2874.5



TEST NUMBER: P910054  
 CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.63	8.40	8.68	9.45	10.88	7.20	7.97	8.25	9.02	10.45
	3H	9.29	9.97	10.35	11.04	12.48	8.81	9.50	9.87	10.56	12.01
	4H	9.87	10.52	10.94	11.58	13.04	9.40	10.05	10.47	11.11	12.57
	6H	10.26	10.86	11.34	11.93	13.40	9.79	10.39	10.87	11.46	12.92
	8H	10.36	10.94	11.45	12.02	13.48	9.89	10.46	10.98	11.55	13.01
	12H	10.41	10.95	11.50	12.03	13.51	9.93	10.47	11.02	11.55	13.03
4H	2H	8.08	8.73	9.16	9.80	11.25	7.74	8.39	8.82	9.45	10.91
	3H	9.94	10.48	11.03	11.58	13.04	9.55	10.09	10.63	11.18	12.65
	4H	10.65	11.15	11.74	12.23	13.72	10.24	10.74	11.34	11.83	13.31
	6H	11.16	11.59	12.26	12.69	14.17	10.75	11.18	11.85	12.28	13.77
	8H	11.31	11.71	12.41	12.80	14.30	10.89	11.29	11.99	12.39	13.89
	12H	11.37	11.74	12.49	12.85	14.35	10.95	11.32	12.07	12.43	13.93
8H	4H	10.84	11.24	11.94	12.34	13.83	10.48	10.88	11.58	11.98	13.47
	6H	11.47	11.80	12.59	12.94	14.43	11.10	11.43	12.22	12.57	14.07
	8H	11.69	11.97	12.81	13.10	14.61	11.32	11.61	12.44	12.73	14.24
	12H	11.81	12.07	12.94	13.19	14.74	11.43	11.68	12.56	12.80	14.35
12H	4H	10.82	11.18	11.94	12.29	13.79	10.47	10.83	11.58	11.94	13.44
	6H	11.49	11.78	12.62	12.91	14.42	11.14	11.43	12.27	12.55	14.07
	8H	11.73	11.99	12.86	13.10	14.66	11.38	11.63	12.51	12.75	14.30