

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910057

Luminaire Tested: DFN2DIP-TR4F0-050D090US840-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910057
REPORT IS A COMBINATION OF REPORTS P901982 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-050D090US840-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13289.8 lumens
Efficiency: N/A
Efficacy: 121.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 109.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910057

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-RLLONL

Luminous Intensity Polar Plot

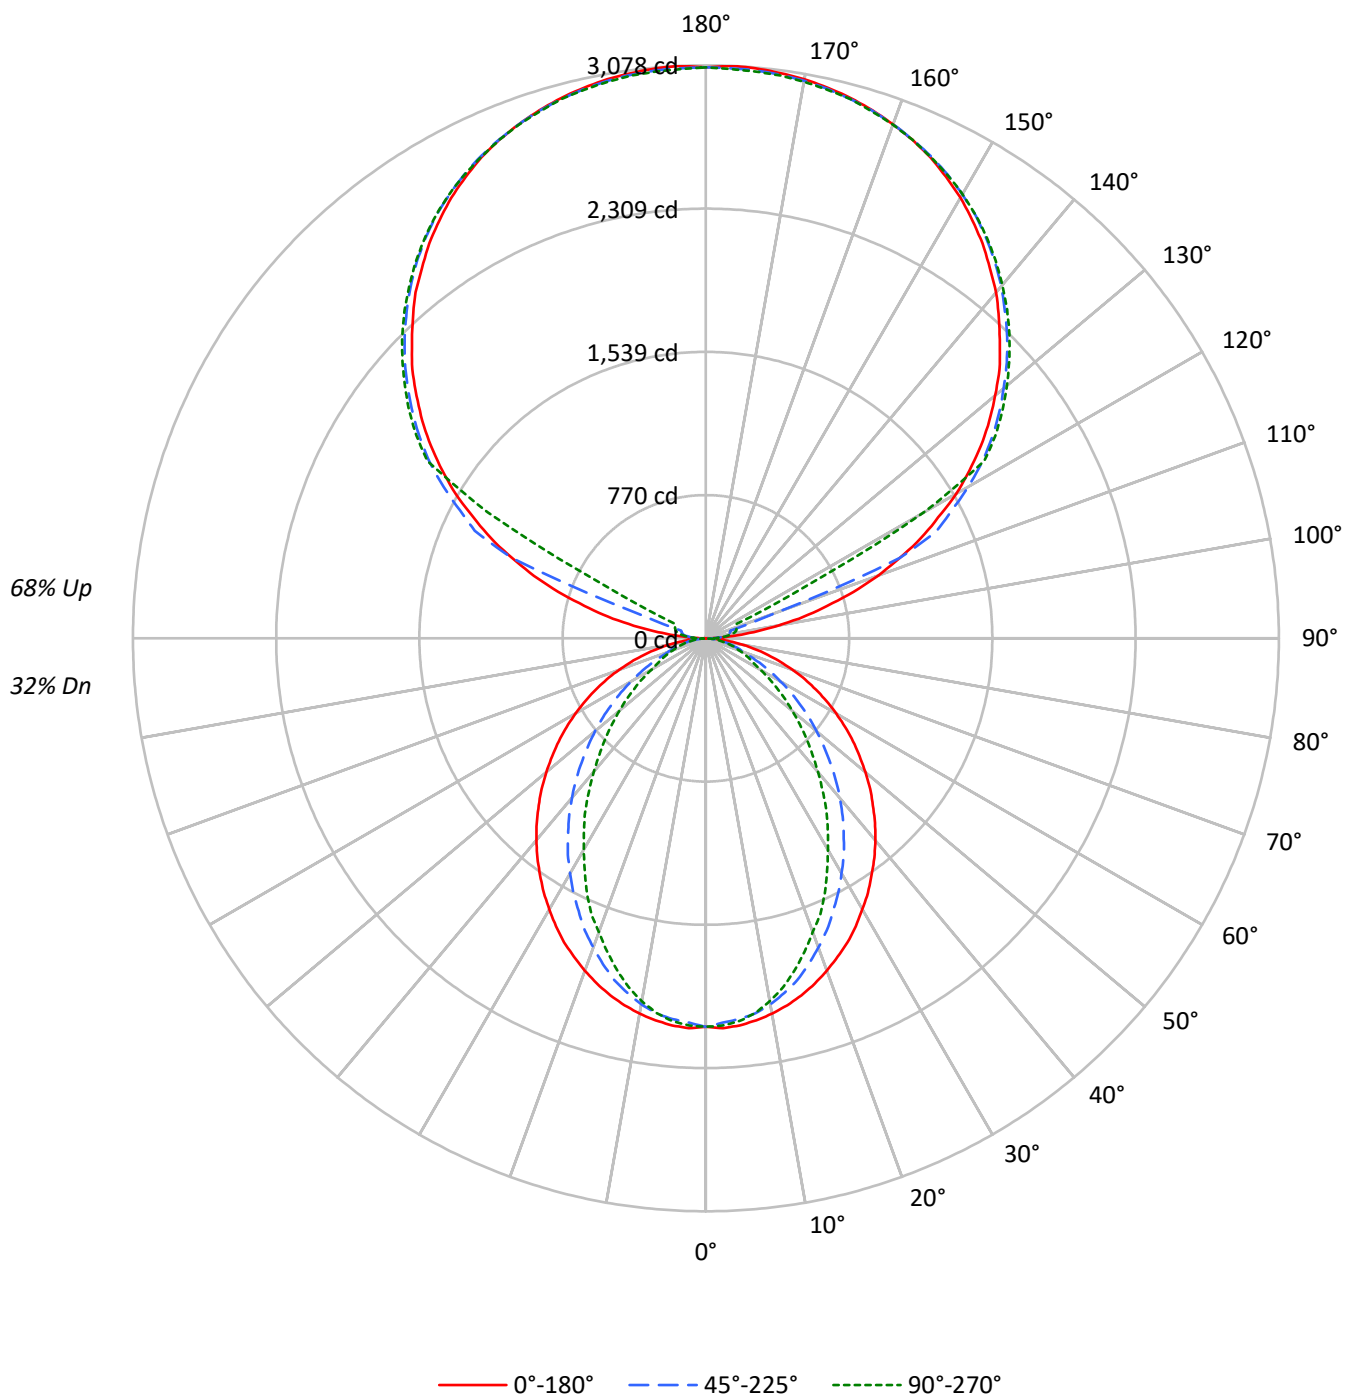

TEST NUMBER: P910057

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	66	62	57	54	51	44	42	40	32	30	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	28	27	25
4	72	62	54	49	65	56	50	45	45	40	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	22	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	18	16	16	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	14	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1658	1658	1658
5°	1661	1632	1642
10°	1644	1600	1588
15°	1622	1547	1506
20°	1592	1474	1404
25°	1561	1392	1307
30°	1520	1308	1182
35°	1479	1218	1073
40°	1438	1125	948
45°	1391	1022	835
50°	1341	917	724
55°	1290	806	618
60°	1230	689	508
65°	1162	571	458
70°	1079	460	414
75°	975	406	376
80°	823	340	326
85°	574	227	245

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1628 cd/sqm

TEST NUMBER: P910057

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.6	1.5
10°-20°	536.9	4.0
20°-30°	753.8	5.7
30°-40°	821.7	6.2
40°-50°	755.2	5.7
50°-60°	593.1	4.5
60°-70°	386.1	2.9
70°-80°	198.7	1.5
80°-90°	56.1	0.4
90°-100°	101.2	0.8
100°-110°	377.0	2.8
110°-120°	1000.0	7.5
120°-130°	1658.6	12.5
130°-140°	1761.8	13.3
140°-150°	1637.4	12.3
150°-160°	1316.4	9.9
160°-170°	848.2	6.4
170°-180°	292.0	2.2
0°-30°	1486.3	11.2
0°-40°	2308.0	17.4
0°-60°	3656.4	27.5
0°-90°	4297.3	32.3
90°-120°	1478.2	11.1
90°-150°	6535.9	49.2
90°-180°	8992.0	67.7
0°-180°	13289.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2087	2087	2087	2087	2087	
5°	2087	2078	2053	2070	2064	198
15°	1985	1964	1900	1864	1845	559
25°	1802	1741	1617	1539	1511	829
35°	1552	1456	1290	1171	1129	972
45°	1269	1143	944	810	765	980
55°	965	818	614	500	465	862
65°	652	499	329	264	259	646
75°	348	215	151	138	136	368
85°	81	42	36	36	36	93
90°	2	27	44	56	60	12
95°	144	71	86	98	95	171
105°	675	741	135	160	169	721
115°	1276	1314	1370	342	182	1256
125°	1804	1833	1876	1891	1898	1609
135°	2233	2268	2288	2311	2306	1725
145°	2590	2588	2626	2641	2630	1620
155°	2852	2832	2859	2872	2854	1314
165°	3005	2992	2999	3014	2999	849
175°	3074	3058	3063	3078	3056	293
180°	3067	3067	3067	3067	3067	

TEST NUMBER: P910057

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2086.9	2086.9	2086.9	2086.9	2086.9
2.5°	2096.3	2086.9	2066.1	2085.1	2081.2
5°	2086.9	2077.5	2052.9	2069.8	2064.3
7.5°	2069.8	2058.6	2032.2	2039.6	2030.1
10°	2047.2	2034.0	1996.3	1990.5	1979.2
12.5°	2018.9	2002.0	1950.9	1939.6	1918.7
15°	1984.9	1964.1	1900.0	1864.1	1845.2
17.5°	1945.2	1915.0	1835.6	1794.1	1763.8
20°	1900.0	1862.1	1767.7	1720.6	1678.9
22.5°	1850.9	1807.4	1697.8	1633.7	1605.4
25°	1801.7	1741.2	1616.6	1539.2	1510.8
27.5°	1743.2	1678.9	1541.1	1452.3	1408.9
30°	1680.9	1609.0	1457.9	1361.7	1310.6
32.5°	1620.4	1533.5	1378.8	1265.4	1218.1
35°	1552.5	1456.1	1290.0	1170.9	1129.3
37.5°	1486.3	1382.4	1206.9	1076.4	1029.4
40°	1416.4	1303.2	1119.8	985.8	936.8
42.5°	1344.7	1223.9	1033.1	893.2	846.2
45°	1269.2	1142.6	944.3	810.1	764.8
47.5°	1197.4	1063.4	859.4	725.2	683.7
50°	1118.1	984.0	776.3	645.8	606.3
52.5°	1040.6	898.9	696.9	572.3	536.4
55°	965.0	817.7	613.7	500.5	464.6
57.5°	887.7	736.6	540.2	434.4	404.1
60°	808.3	657.2	462.6	366.5	336.2
62.5°	730.9	579.9	396.6	306.0	290.9
65°	651.6	498.6	328.6	264.5	258.7
67.5°	576.0	423.0	264.5	232.3	226.6
70°	496.8	349.4	219.0	200.2	192.6
72.5°	421.2	281.3	183.2	168.1	164.3
75°	347.5	215.2	151.1	137.8	136.0
77.5°	273.9	152.9	119.1	111.4	107.6
80°	205.8	109.6	90.6	83.1	83.1
82.5°	143.5	73.7	62.3	58.5	58.5
85°	81.2	41.5	35.9	35.9	35.9
87.5°	30.3	15.0	15.0	13.2	13.2
90°	2.1	26.7	44.2	55.6	59.8
92.5°	55.6	46.7	53.2	57.8	59.8
95°	144.2	70.9	86.4	97.8	95.4
97.5°	259.6	77.8	113.1	119.9	122.0
100°	392.9	88.9	126.5	144.2	148.7
102.5°	539.3	535.0	131.0	155.2	162.1
105°	674.7	741.4	135.4	159.8	168.6
107.5°	832.3	887.7	140.0	164.2	173.2
110°	983.3	1029.8	388.5	166.5	175.3

TEST NUMBER: P910057

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1125.4	1165.2	1127.5	170.8	177.6
115°	1276.2	1313.8	1369.5	341.8	182.1
117.5°	1407.1	1451.5	1489.3	1171.8	590.4
120°	1553.7	1586.9	1627.0	1653.6	1353.9
122.5°	1677.9	1713.4	1758.0	1771.1	1773.5
125°	1804.3	1833.3	1875.5	1891.1	1897.6
127.5°	1919.8	1950.9	1984.4	2006.5	2008.6
130°	2028.6	2064.3	2088.5	2112.9	2110.9
132.5°	2139.6	2168.6	2192.8	2212.9	2210.8
135°	2232.9	2268.5	2288.3	2310.7	2306.2
137.5°	2330.5	2357.0	2379.4	2401.6	2395.0
140°	2425.8	2443.8	2468.0	2488.0	2477.0
142.5°	2506.0	2521.5	2550.2	2567.9	2556.9
145°	2590.3	2587.9	2625.7	2641.2	2630.1
147.5°	2663.3	2656.8	2694.4	2705.5	2696.7
150°	2734.5	2719.0	2754.5	2767.6	2756.6
152.5°	2794.3	2776.6	2809.8	2823.3	2807.7
155°	2852.1	2832.3	2858.8	2872.1	2854.4
157.5°	2898.7	2881.0	2901.0	2916.6	2898.7
160°	2938.7	2925.3	2938.7	2951.9	2936.4
162.5°	2974.1	2960.8	2971.9	2987.5	2967.5
165°	3005.2	2991.9	2998.6	3014.1	2998.6
167.5°	3029.7	3016.3	3023.0	3038.6	3018.6
170°	3049.7	3036.3	3040.7	3056.3	3036.3
172.5°	3062.9	3049.7	3054.1	3069.7	3049.7
175°	3073.9	3058.4	3062.9	3078.4	3056.3
177.5°	3078.4	3062.9	3065.2	3080.8	3060.8
180°	3067.4	3067.4	3067.4	3067.4	3067.4

TEST NUMBER: P910057

CATALOG NUMBER: DFN2DIP-TR4F0-050D090US840-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.98	7.68	8.08	8.78	10.28	2.95	3.66	4.05	4.75	6.25
	3H	8.65	9.27	9.75	10.38	11.90	4.13	4.76	5.24	5.86	7.39
	4H	9.25	9.84	10.37	10.95	12.48	4.58	5.17	5.70	6.28	7.80
	6H	9.66	10.21	10.79	11.32	12.86	4.89	5.44	6.02	6.55	8.09
	8H	9.79	10.31	10.92	11.43	12.96	4.98	5.50	6.11	6.62	8.15
	12H	9.84	10.34	10.98	11.45	13.01	5.02	5.51	6.15	6.63	8.18
4H	2H	6.98	7.58	8.11	8.68	10.21	3.53	4.13	4.66	5.23	6.76
	3H	8.80	9.29	9.93	10.42	11.96	4.87	5.37	6.00	6.50	8.04
	4H	9.48	9.94	10.62	11.06	12.62	5.41	5.87	6.55	6.99	8.55
	6H	9.99	10.38	11.14	11.53	13.08	5.83	6.22	6.97	7.36	8.91
	8H	10.17	10.53	11.31	11.66	13.23	5.95	6.32	7.10	7.45	9.02
	12H	10.25	10.58	11.41	11.73	13.30	6.01	6.34	7.17	7.49	9.06
8H	4H	9.44	9.81	10.58	10.94	12.51	5.68	6.05	6.83	7.18	8.75
	6H	10.01	10.31	11.17	11.48	13.05	6.20	6.50	7.36	7.68	9.24
	8H	10.22	10.48	11.39	11.64	13.22	6.39	6.65	7.56	7.81	9.39
	12H	10.35	10.58	11.52	11.74	13.36	6.50	6.74	7.68	7.89	9.51
12H	4H	9.39	9.72	10.55	10.87	12.44	5.68	6.01	6.84	7.16	8.73
	6H	9.98	10.24	11.15	11.40	12.98	6.25	6.51	7.42	7.67	9.25
	8H	10.20	10.43	11.37	11.58	13.20	6.45	6.68	7.62	7.84	9.46