

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910072

Luminaire Tested: DFN2DIP-TR4F0-060D040US840-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P910072  
REPORT IS A COMBINATION OF REPORTS P900374 AND P897293  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-060D040US840-RLLFLL  
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8725.3 lumens  
Efficiency: N/A  
Efficacy: 104.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 83.7  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9781  
Total Harmonic Distortion (THDi): 0.075  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P910072  
CATALOG NUMBER: DFN2DIP-TR4F0-060D040US840-RLLFLL

### Luminous Intensity Polar Plot

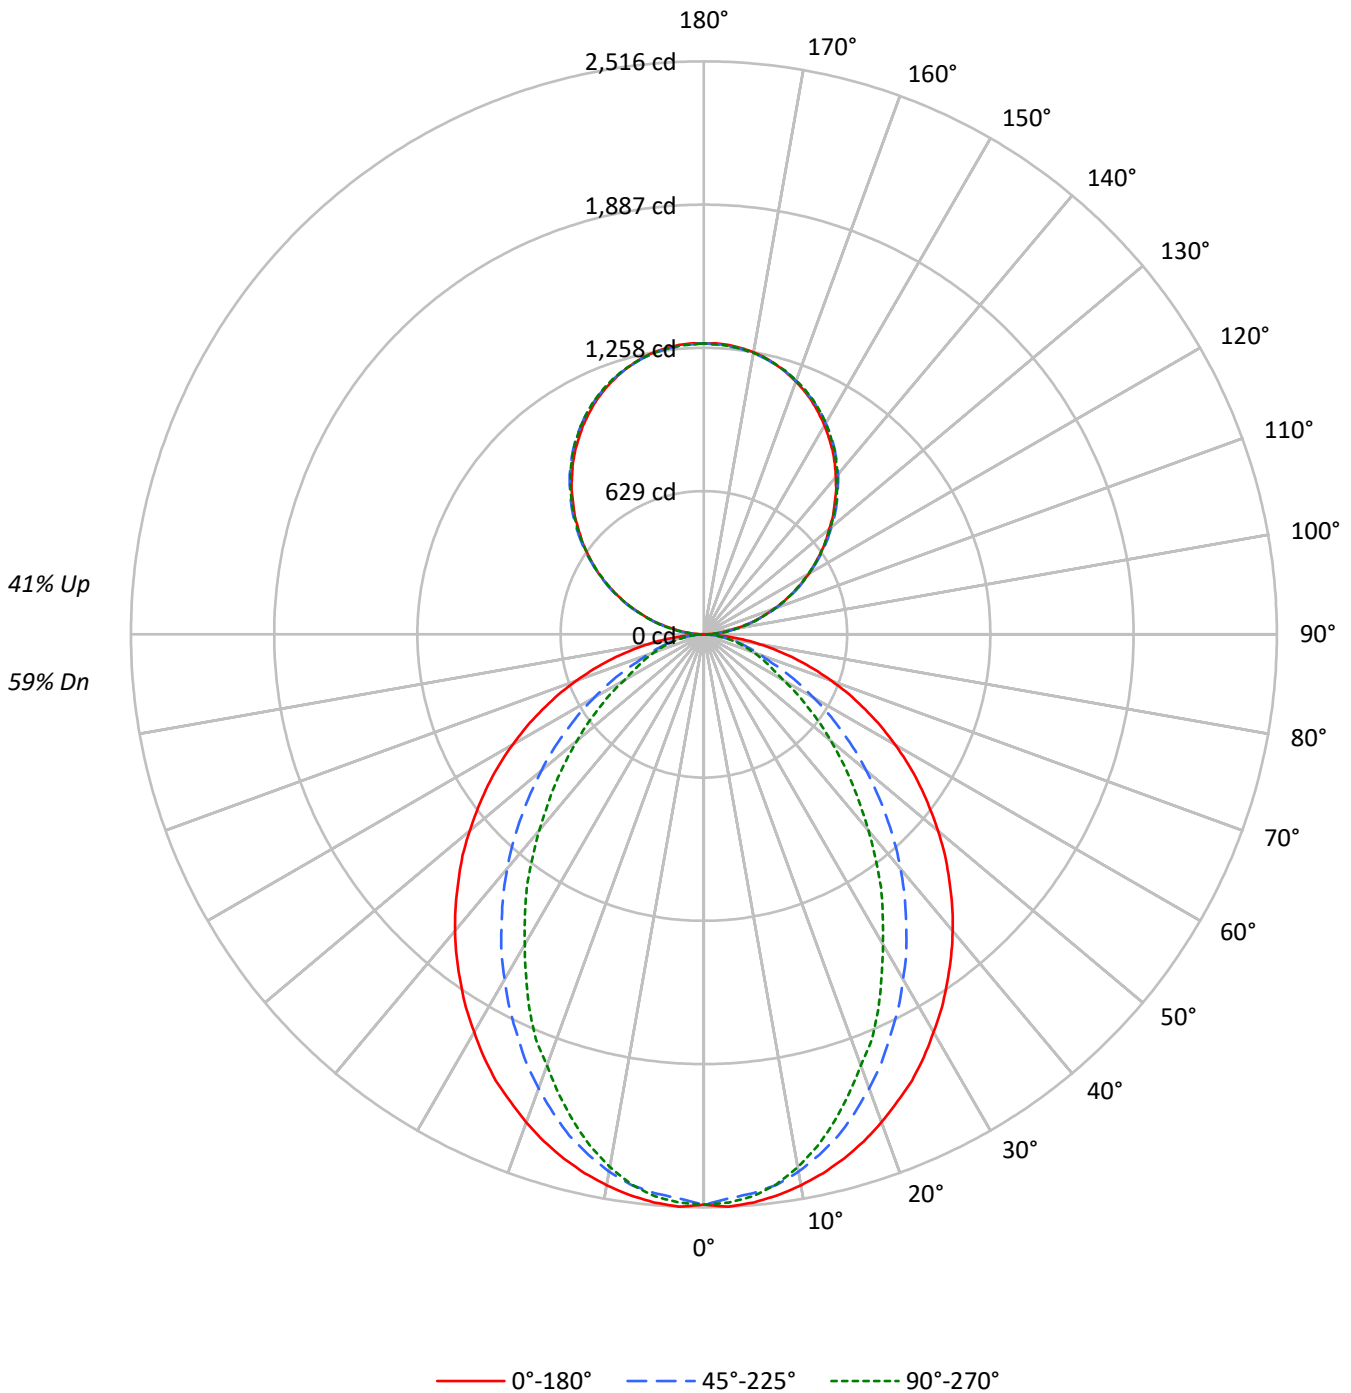



TEST NUMBER: P910072

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US840-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59			59
1	100	96	92	89	94	90	87	84	78	76	74	68	66	64	58	57	56	51			51
2	92	85	79	74	86	79	74	70	69	65	62	60	57	55	52	50	48	44			44
3	84	75	68	62	78	70	64	59	62	57	53	54	50	47	46	44	41	38			38
4	77	67	59	53	72	63	56	51	55	50	46	48	44	41	42	39	36	33			33
5	71	60	52	46	66	56	49	44	50	44	40	44	39	36	38	34	32	29			29
6	66	54	46	40	61	51	44	39	45	39	35	40	35	32	35	31	28	26			26
7	61	49	41	36	57	46	39	34	41	35	31	36	32	28	32	28	25	23			23
8	57	45	37	32	53	42	35	30	38	32	28	33	29	25	29	26	23	21			21
9	53	41	34	29	50	39	32	27	35	29	25	31	26	23	27	24	21	19			19
10	50	38	31	26	47	36	29	25	32	27	23	29	24	21	25	22	19	17			17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1989	1989	1989
5°	1993	1958	1970
10°	1973	1919	1906
15°	1946	1856	1807
20°	1910	1769	1685
25°	1873	1671	1568
30°	1824	1570	1419
35°	1775	1462	1288
40°	1726	1350	1138
45°	1669	1226	1002
50°	1610	1101	869
55°	1548	967	741
60°	1477	827	610
65°	1394	685	549
70°	1294	552	497
75°	1170	487	452
80°	988	408	392
85°	689	272	294

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1669 cd/sqm



TEST NUMBER: P910072

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US840-RLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	234.7	2.7
10°-20°	644.3	7.4
20°-30°	904.6	10.4
30°-40°	986.1	11.3
40°-50°	906.3	10.4
50°-60°	711.7	8.2
60°-70°	463.3	5.3
70°-80°	238.5	2.7
80°-90°	64.5	0.7
90°-100°	79.1	0.9
100°-110°	251.2	2.9
110°-120°	429.8	4.9
120°-130°	565.3	6.5
130°-140°	634.5	7.3
140°-150°	622.2	7.1
150°-160°	522.0	6.0
160°-170°	346.2	4.0
170°-180°	121.0	1.4
0°-30°	1783.6	20.4
0°-40°	2769.6	31.7
0°-60°	4387.7	50.3
0°-90°	5154.0	59.1
90°-120°	760.1	8.7
90°-150°	2582.2	29.6
90°-180°	3571.0	40.9
0°-180°	8725.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2504	2504	2504	2504	2504	
5°	2504	2493	2463	2484	2477	237
15°	2382	2357	2280	2237	2214	671
25°	2162	2090	1940	1847	1813	994
35°	1863	1747	1548	1405	1355	1166
45°	1523	1371	1133	972	918	1176
55°	1158	981	736	601	558	1035
65°	782	598	394	317	310	775
75°	417	258	181	165	163	441
85°	97	50	43	43	43	112
90°	1	14	38	35	37	9
95°	56	67	69	69	67	63
105°	232	235	237	239	239	245
115°	431	438	436	434	431	427
125°	627	637	634	630	629	561
135°	812	823	826	825	822	627
145°	985	993	999	1000	996	616
155°	1126	1130	1133	1138	1135	519
165°	1226	1224	1224	1232	1227	346
175°	1275	1272	1270	1278	1271	121
180°	1278	1278	1278	1278	1278	



TEST NUMBER: P910072

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US840-RLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2504.3	2504.3	2504.3	2504.3	2504.3
2.5°	2515.6	2504.3	2479.2	2502.0	2497.5
5°	2504.3	2493.0	2463.4	2483.9	2477.1
7.5°	2483.9	2470.3	2438.6	2447.5	2436.2
10°	2456.6	2440.7	2395.6	2388.6	2375.1
12.5°	2422.8	2402.3	2341.0	2327.5	2302.5
15°	2381.9	2356.8	2279.9	2236.9	2214.2
17.5°	2334.3	2297.9	2202.7	2152.9	2116.7
20°	2279.9	2234.4	2121.2	2064.7	2014.7
22.5°	2221.0	2168.8	2037.3	1960.4	1926.4
25°	2162.1	2089.5	1940.0	1847.1	1813.0
27.5°	2091.9	2014.7	1849.3	1742.7	1690.6
30°	2017.1	1930.8	1749.5	1634.1	1572.8
32.5°	1944.5	1840.2	1654.6	1518.4	1461.7
35°	1863.0	1747.4	1548.0	1405.1	1355.1
37.5°	1783.6	1658.8	1448.2	1291.7	1235.2
40°	1699.7	1563.9	1343.8	1183.0	1124.1
42.5°	1613.7	1468.6	1239.7	1071.9	1015.4
45°	1523.0	1371.0	1133.3	972.1	917.8
47.5°	1436.9	1276.1	1031.3	870.2	820.4
50°	1341.7	1180.8	931.5	775.0	727.6
52.5°	1248.6	1078.6	836.3	686.7	643.7
55°	1158.0	981.3	736.5	600.7	557.5
57.5°	1065.2	883.8	648.2	521.3	484.9
60°	970.0	788.7	555.2	439.8	403.4
62.5°	877.2	695.9	475.8	367.2	349.1
65°	781.9	598.2	394.4	317.4	310.4
67.5°	691.3	507.6	317.4	278.7	272.0
70°	596.0	419.3	262.8	240.2	231.1
72.5°	505.4	337.6	219.7	201.8	197.1
75°	417.0	258.2	181.3	165.4	163.3
77.5°	328.7	183.5	142.8	133.7	129.2
80°	246.9	131.5	108.7	99.8	99.8
82.5°	172.2	88.5	74.7	70.2	70.2
85°	97.4	49.8	43.0	43.0	43.0
87.5°	36.4	18.1	18.1	15.9	15.9
90°	1.1	13.8	37.8	35.4	36.6
92.5°	23.8	32.3	33.5	34.6	34.6
95°	56.2	67.1	69.0	69.0	67.1
97.5°	93.6	103.6	107.9	107.9	107.9
100°	136.7	145.6	148.7	148.7	147.5
102.5°	182.2	188.7	193.0	194.1	193.0
105°	231.9	234.9	237.2	239.1	239.1
107.5°	281.1	285.8	285.8	286.5	281.1
110°	328.9	335.1	335.1	335.1	332.0



TEST NUMBER: P910072

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US840-RLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	380.5	387.1	385.9	382.8	380.5
115°	431.3	437.6	435.6	434.4	431.3
117.5°	481.8	490.3	484.9	481.8	478.8
120°	532.7	541.1	532.7	532.7	529.2
122.5°	578.9	589.7	584.3	581.2	578.9
125°	627.4	637.0	634.0	630.5	629.3
127.5°	674.8	686.7	682.5	677.8	674.8
130°	719.0	733.0	731.0	728.7	724.5
132.5°	768.7	779.5	780.3	774.9	771.8
135°	811.5	823.4	825.8	824.6	821.5
137.5°	859.3	868.9	870.8	870.0	865.5
140°	901.2	910.9	916.3	916.3	912.0
142.5°	944.4	954.0	957.0	958.3	954.0
145°	985.2	992.9	999.1	1000.3	996.0
147.5°	1021.8	1031.4	1036.0	1037.9	1033.7
150°	1059.6	1066.1	1070.4	1073.8	1070.4
152.5°	1093.1	1099.5	1105.0	1109.2	1105.0
155°	1126.5	1129.6	1133.1	1138.5	1135.0
157.5°	1155.5	1157.7	1159.6	1167.4	1162.0
160°	1181.2	1183.6	1184.7	1191.2	1186.6
162.5°	1205.1	1205.1	1206.3	1213.6	1208.2
165°	1225.6	1224.4	1224.4	1232.0	1226.7
167.5°	1244.1	1240.5	1240.5	1248.3	1242.8
170°	1257.9	1254.8	1253.6	1261.3	1254.8
172.5°	1267.5	1264.5	1263.2	1271.0	1264.5
175°	1275.3	1272.1	1269.8	1277.5	1271.0
177.5°	1279.5	1276.4	1274.0	1280.6	1274.0
180°	1277.5	1277.5	1277.5	1277.5	1277.5



TEST NUMBER: P910072  
 CATALOG NUMBER: DFN2DIP-TR4F0-060D040US840-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.34	11.25	11.22	12.15	13.28	6.31	7.22	7.19	8.12	9.26
	3H	12.02	12.83	12.92	13.74	14.91	7.51	8.32	8.40	9.23	10.39
	4H	12.63	13.40	13.54	14.31	15.49	7.96	8.73	8.87	9.64	10.82
	6H	13.06	13.77	13.98	14.69	15.87	8.29	9.00	9.21	9.92	11.10
	8H	13.19	13.86	14.12	14.80	15.98	8.38	9.05	9.31	9.99	11.18
	12H	13.25	13.89	14.19	14.82	16.03	8.43	9.07	9.36	10.00	11.21
4H	2H	10.37	11.13	11.28	12.05	13.22	6.92	7.68	7.83	8.60	9.77
	3H	12.20	12.84	13.13	13.78	14.97	8.27	8.91	9.20	9.86	11.05
	4H	12.90	13.48	13.83	14.42	15.63	8.83	9.41	9.76	10.35	11.56
	6H	13.42	13.92	14.37	14.88	16.09	9.25	9.75	10.20	10.72	11.93
	8H	13.59	14.06	14.54	15.02	16.25	9.38	9.85	10.33	10.81	12.03
	12H	13.69	14.11	14.66	15.09	16.32	9.45	9.87	10.42	10.85	12.08
8H	4H	12.87	13.34	13.82	14.30	15.52	9.11	9.58	10.06	10.54	11.76
	6H	13.44	13.83	14.42	14.82	16.05	9.64	10.02	10.61	11.02	12.25
	8H	13.66	14.00	14.64	14.99	16.23	9.83	10.17	10.81	11.16	12.40
	12H	13.80	14.10	14.79	15.08	16.37	9.95	10.25	10.94	11.23	12.52
12H	4H	12.83	13.25	13.80	14.22	15.45	9.12	9.54	10.09	10.52	11.75
	6H	13.42	13.76	14.40	14.74	15.99	9.68	10.03	10.67	11.01	12.26
	8H	13.64	13.94	14.63	14.92	16.21	9.90	10.20	10.89	11.18	12.47