

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910126

Luminaire Tested: DFN2DIP-TR4F0-070D090US840-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910126
REPORT IS A COMBINATION OF REPORTS P900465 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-070D090US840-FLLFLL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15042.0 lumens
Efficiency: N/A
Efficacy: 112.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 133.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910126

CATALOG NUMBER: DFN2DIP-TR4F0-070D090US840-FLLFLL

Luminous Intensity Polar Plot

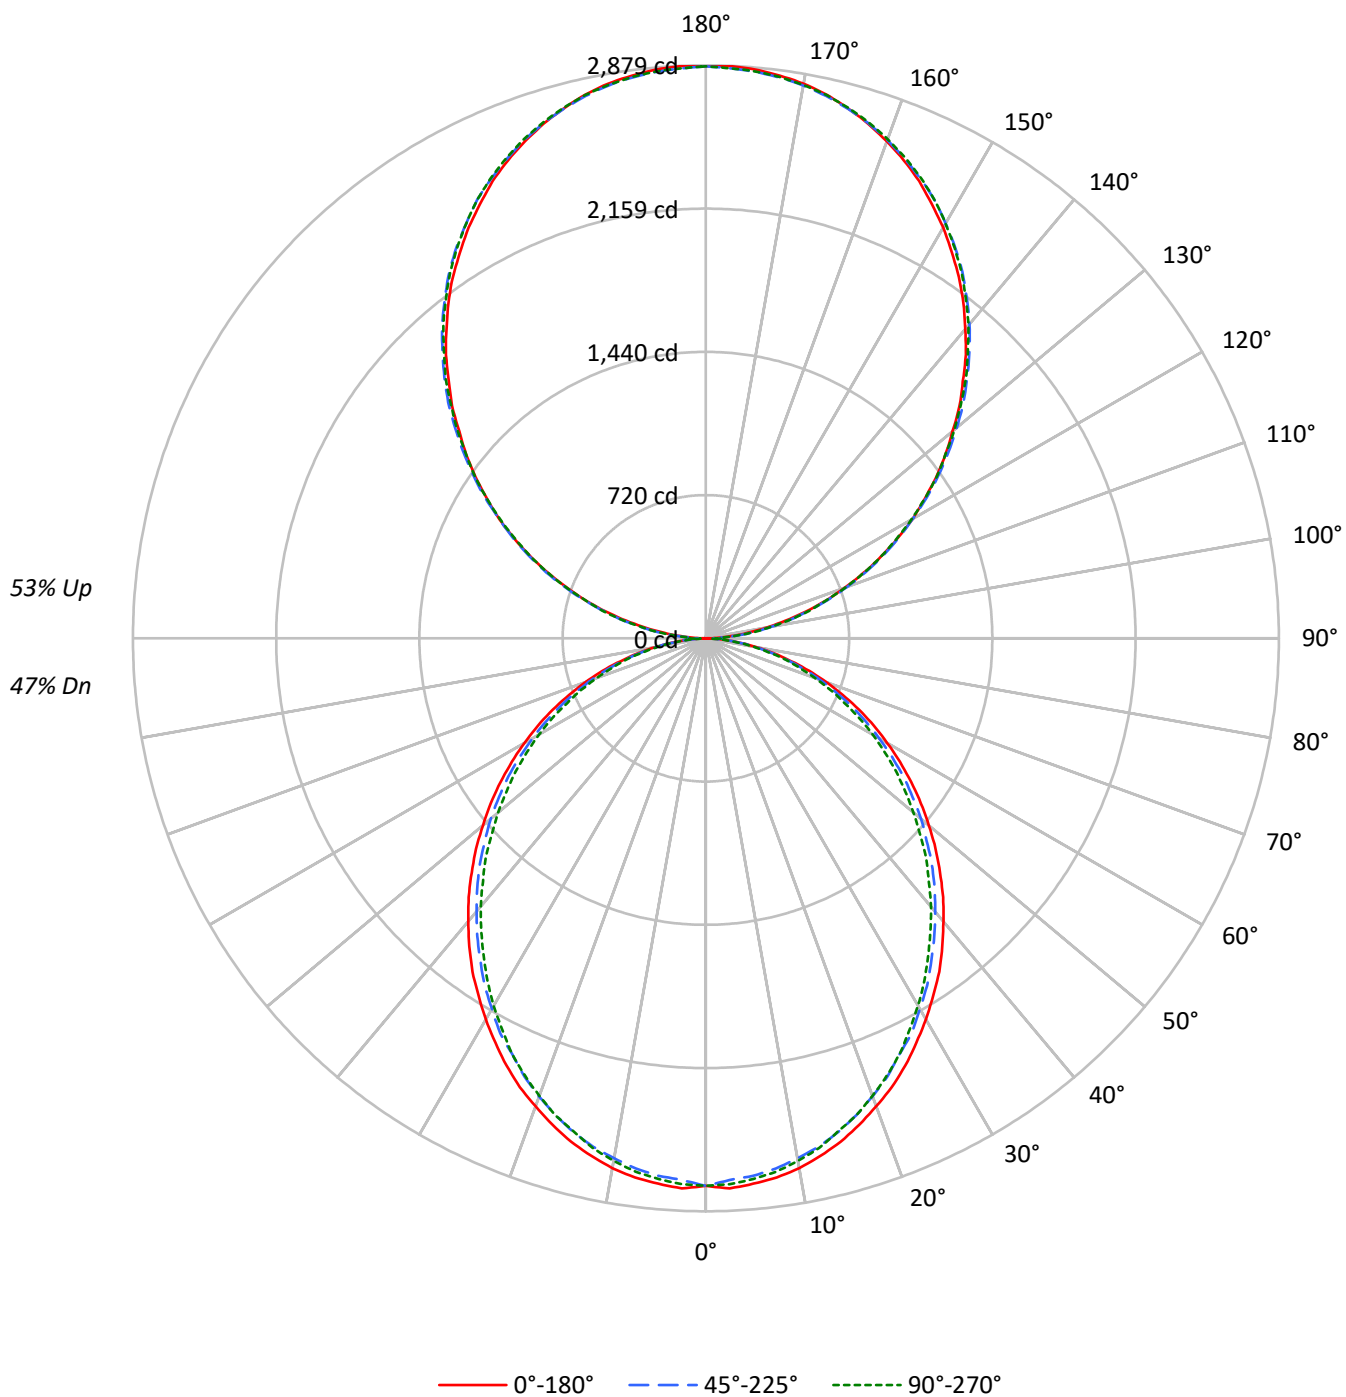

TEST NUMBER: P910126

CATALOG NUMBER: DFN2DIP-TR4F0-070D090US840-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53
1	97	93	89	85	89	85	82	79	71	69	67	59	57	55	47	46	45
2	88	81	75	70	81	75	69	65	63	59	55	51	49	46	41	39	38
3	81	71	64	58	74	66	59	54	55	50	47	45	42	39	37	34	32
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24
6	62	50	42	36	57	47	39	34	39	34	30	33	29	25	27	24	21
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	24	21	19
8	53	41	33	28	49	38	31	27	33	27	23	27	23	20	22	19	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2185	2185	2185
5°	2189	2155	2169
10°	2171	2126	2140
15°	2139	2091	2094
20°	2096	2042	2047
25°	2053	1984	1992
30°	1999	1930	1923
35°	1948	1866	1850
40°	1886	1801	1780
45°	1823	1737	1709
50°	1755	1669	1627
55°	1683	1590	1551
60°	1602	1497	1464
65°	1514	1401	1362
70°	1402	1283	1251
75°	1246	1142	1150
80°	1059	963	955
85°	767	654	633

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2240 cd/sqm

TEST NUMBER: P910126

CATALOG NUMBER: DFN2DIP-TR4F0-070D090US840-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	258.9	1.7
10°-20°	728.4	4.8
20°-30°	1070.5	7.1
30°-40°	1243.3	8.3
40°-50°	1241.7	8.3
50°-60°	1082.8	7.2
60°-70°	800.4	5.3
70°-80°	452.9	3.0
80°-90°	127.7	0.8
90°-100°	177.9	1.2
100°-110°	565.2	3.8
110°-120°	967.2	6.4
120°-130°	1272.0	8.5
130°-140°	1427.7	9.5
140°-150°	1400.0	9.3
150°-160°	1174.4	7.8
160°-170°	778.9	5.2
170°-180°	272.2	1.8
0°-30°	2057.8	13.7
0°-40°	3301.1	21.9
0°-60°	5625.6	37.4
0°-90°	7006.5	46.6
90°-120°	1710.2	11.4
90°-150°	5809.9	38.6
90°-180°	8035.0	53.4
0°-180°	15042.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2751	2751	2751	2751	2751	
5°	2751	2740	2711	2732	2727	261
15°	2618	2603	2568	2579	2566	737
25°	2370	2349	2304	2309	2304	1090
35°	2045	2018	1976	1960	1947	1277
45°	1664	1645	1605	1576	1566	1284
55°	1259	1243	1211	1180	1166	1126
65°	849	833	807	783	770	840
75°	444	439	426	410	415	474
85°	108	106	103	95	93	121
90°	3	31	85	80	82	15
95°	126	151	155	155	151	141
105°	522	529	534	538	538	551
115°	971	984	980	978	971	960
125°	1412	1433	1426	1419	1416	1261
135°	1826	1853	1858	1855	1848	1411
145°	2217	2234	2248	2250	2241	1385
155°	2535	2542	2550	2562	2554	1167
165°	2757	2755	2755	2772	2760	778
175°	2869	2862	2857	2874	2860	273
180°	2874	2874	2874	2874	2874	

TEST NUMBER: P910126

CATALOG NUMBER: DFN2DIP-TR4F0-070D090US840-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2750.6	2750.6	2750.6	2750.6	2750.6
2.5°	2766.6	2753.4	2724.2	2750.6	2745.5
5°	2750.6	2740.3	2711.1	2732.1	2727.0
7.5°	2732.1	2716.3	2687.2	2708.6	2703.2
10°	2703.2	2684.6	2652.9	2674.0	2666.1
12.5°	2663.3	2647.7	2616.0	2629.1	2623.7
15°	2618.5	2602.7	2568.2	2578.9	2565.7
17.5°	2562.8	2547.2	2512.6	2525.9	2512.6
20°	2501.9	2486.3	2449.2	2457.1	2446.7
22.5°	2441.3	2417.5	2383.0	2383.0	2377.6
25°	2369.9	2348.7	2303.9	2309.0	2303.9
27.5°	2290.4	2271.9	2237.7	2229.8	2216.6
30°	2211.3	2189.9	2150.4	2142.5	2131.8
32.5°	2126.5	2110.8	2068.4	2052.5	2041.7
35°	2044.6	2018.2	1975.8	1959.8	1946.6
37.5°	1952.0	1928.1	1885.7	1867.2	1854.0
40°	1856.8	1835.5	1793.1	1769.6	1758.9
42.5°	1764.2	1742.9	1700.8	1674.2	1658.4
45°	1663.8	1645.3	1605.4	1576.5	1565.8
47.5°	1565.8	1547.3	1504.9	1475.7	1460.1
50°	1462.6	1449.4	1412.3	1375.3	1362.1
52.5°	1362.1	1343.6	1309.4	1280.2	1261.6
55°	1259.1	1243.1	1211.4	1179.7	1166.5
57.5°	1155.9	1142.7	1108.1	1076.4	1065.8
60°	1052.6	1042.2	1005.2	976.0	968.2
62.5°	952.1	933.6	907.3	880.9	870.2
65°	849.2	833.1	806.8	782.9	769.7
67.5°	743.4	729.9	706.3	687.8	677.1
70°	645.4	634.8	610.9	592.4	582.0
72.5°	544.9	534.3	521.1	502.6	494.7
75°	444.2	439.2	425.7	410.0	415.4
77.5°	354.5	343.8	338.4	330.5	322.8
80°	264.6	261.9	256.5	248.6	243.3
82.5°	179.9	179.9	177.3	166.7	166.7
85°	108.4	105.8	103.3	95.1	92.6
87.5°	47.7	42.4	37.1	29.2	26.4
90°	2.6	31.2	84.9	79.7	82.3
92.5°	53.7	72.8	75.4	78.0	78.0
95°	126.5	150.8	155.1	155.1	150.8
97.5°	210.6	233.1	242.7	242.7	242.7
100°	307.6	327.6	334.5	334.5	331.9
102.5°	409.9	424.6	434.1	436.8	434.1
105°	521.7	528.6	533.8	538.2	538.2
107.5°	632.6	643.0	643.0	644.7	632.6
110°	740.0	754.0	754.0	754.0	747.0

TEST NUMBER: P910126

CATALOG NUMBER: DFN2DIP-TR4F0-070D090US840-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	856.2	870.9	868.3	861.4	856.2
115°	970.6	984.4	980.1	977.5	970.6
117.5°	1084.1	1103.2	1091.1	1084.1	1077.1
120°	1198.5	1217.5	1198.5	1198.5	1190.6
122.5°	1302.4	1326.8	1314.6	1307.7	1302.4
125°	1411.7	1433.3	1426.4	1418.6	1416.0
127.5°	1518.2	1545.1	1535.6	1525.2	1518.2
130°	1617.9	1649.1	1644.8	1639.5	1630.0
132.5°	1729.7	1753.9	1755.7	1743.5	1736.7
135°	1825.8	1852.7	1858.0	1855.3	1848.5
137.5°	1933.3	1955.0	1959.3	1957.6	1947.2
140°	2027.8	2049.4	2061.5	2061.5	2052.0
142.5°	2124.9	2146.5	2153.4	2156.1	2146.5
145°	2216.8	2234.0	2247.9	2250.5	2241.0
147.5°	2299.1	2320.7	2331.1	2335.4	2325.9
150°	2384.0	2398.7	2408.2	2416.0	2408.2
152.5°	2459.3	2474.1	2486.2	2495.8	2486.2
155°	2534.8	2541.6	2549.5	2561.6	2553.8
157.5°	2599.7	2604.9	2609.3	2626.6	2614.4
160°	2657.8	2663.0	2665.6	2680.3	2669.9
162.5°	2711.5	2711.5	2714.1	2730.6	2718.5
165°	2757.4	2754.8	2754.8	2772.2	2760.1
167.5°	2799.0	2791.3	2791.3	2808.5	2796.4
170°	2830.2	2823.3	2820.8	2838.0	2823.3
172.5°	2851.9	2845.0	2842.4	2859.7	2845.0
175°	2869.2	2862.3	2857.1	2874.5	2859.7
177.5°	2878.7	2871.9	2866.6	2881.3	2866.6
180°	2874.5	2874.5	2874.5	2874.5	2874.5



TEST NUMBER: P910126

CATALOG NUMBER: DFN2DIP-TR4F0-070D090US840-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.66	10.49	10.64	11.49	12.81	9.22	10.06	10.21	11.05	12.37
	3H	11.31	12.06	12.31	13.07	14.41	10.84	11.59	11.84	12.59	13.93
	4H	11.90	12.61	12.91	13.62	14.97	11.43	12.13	12.44	13.14	14.49
	6H	12.30	12.95	13.32	13.96	15.32	11.82	12.47	12.84	13.49	14.85
	8H	12.40	13.02	13.43	14.05	15.41	11.93	12.55	12.95	13.58	14.94
	12H	12.45	13.04	13.48	14.06	15.45	11.97	12.56	13.00	13.58	14.96
4H	2H	10.11	10.82	11.13	11.83	13.18	9.77	10.48	10.79	11.49	12.83
	3H	11.98	12.57	13.00	13.61	14.97	11.58	12.17	12.61	13.21	14.57
	4H	12.69	13.23	13.72	14.26	15.65	12.28	12.82	13.32	13.86	15.24
	6H	13.20	13.67	14.25	14.72	16.10	12.79	13.26	13.84	14.31	15.69
	8H	13.35	13.79	14.40	14.83	16.23	12.94	13.37	13.98	14.42	15.82
	12H	13.42	13.82	14.49	14.88	16.28	13.00	13.39	14.06	14.46	15.86
8H	4H	12.88	13.32	13.93	14.37	15.76	12.52	12.96	13.57	14.01	15.40
	6H	13.51	13.87	14.58	14.96	16.36	13.15	13.51	14.22	14.60	15.99
	8H	13.74	14.05	14.81	15.12	16.54	13.37	13.68	14.44	14.75	16.17
	12H	13.87	14.14	14.94	15.21	16.66	13.48	13.76	14.56	14.83	16.28
12H	4H	12.87	13.26	13.93	14.32	15.72	12.52	12.91	13.58	13.97	15.37
	6H	13.54	13.86	14.62	14.93	16.35	13.19	13.51	14.27	14.58	15.99
	8H	13.78	14.06	14.86	15.13	16.58	13.43	13.70	14.51	14.77	16.23