

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910281

Luminaire Tested: DFN2DIP-TR4F0-110D110US840-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910281
REPORT IS A COMBINATION OF REPORTS P902030 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-110D110US840-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 20439.6 lumens
Efficiency: N/A
Efficacy: 103.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 197.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910281

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US840-RLLONL

Luminous Intensity Polar Plot

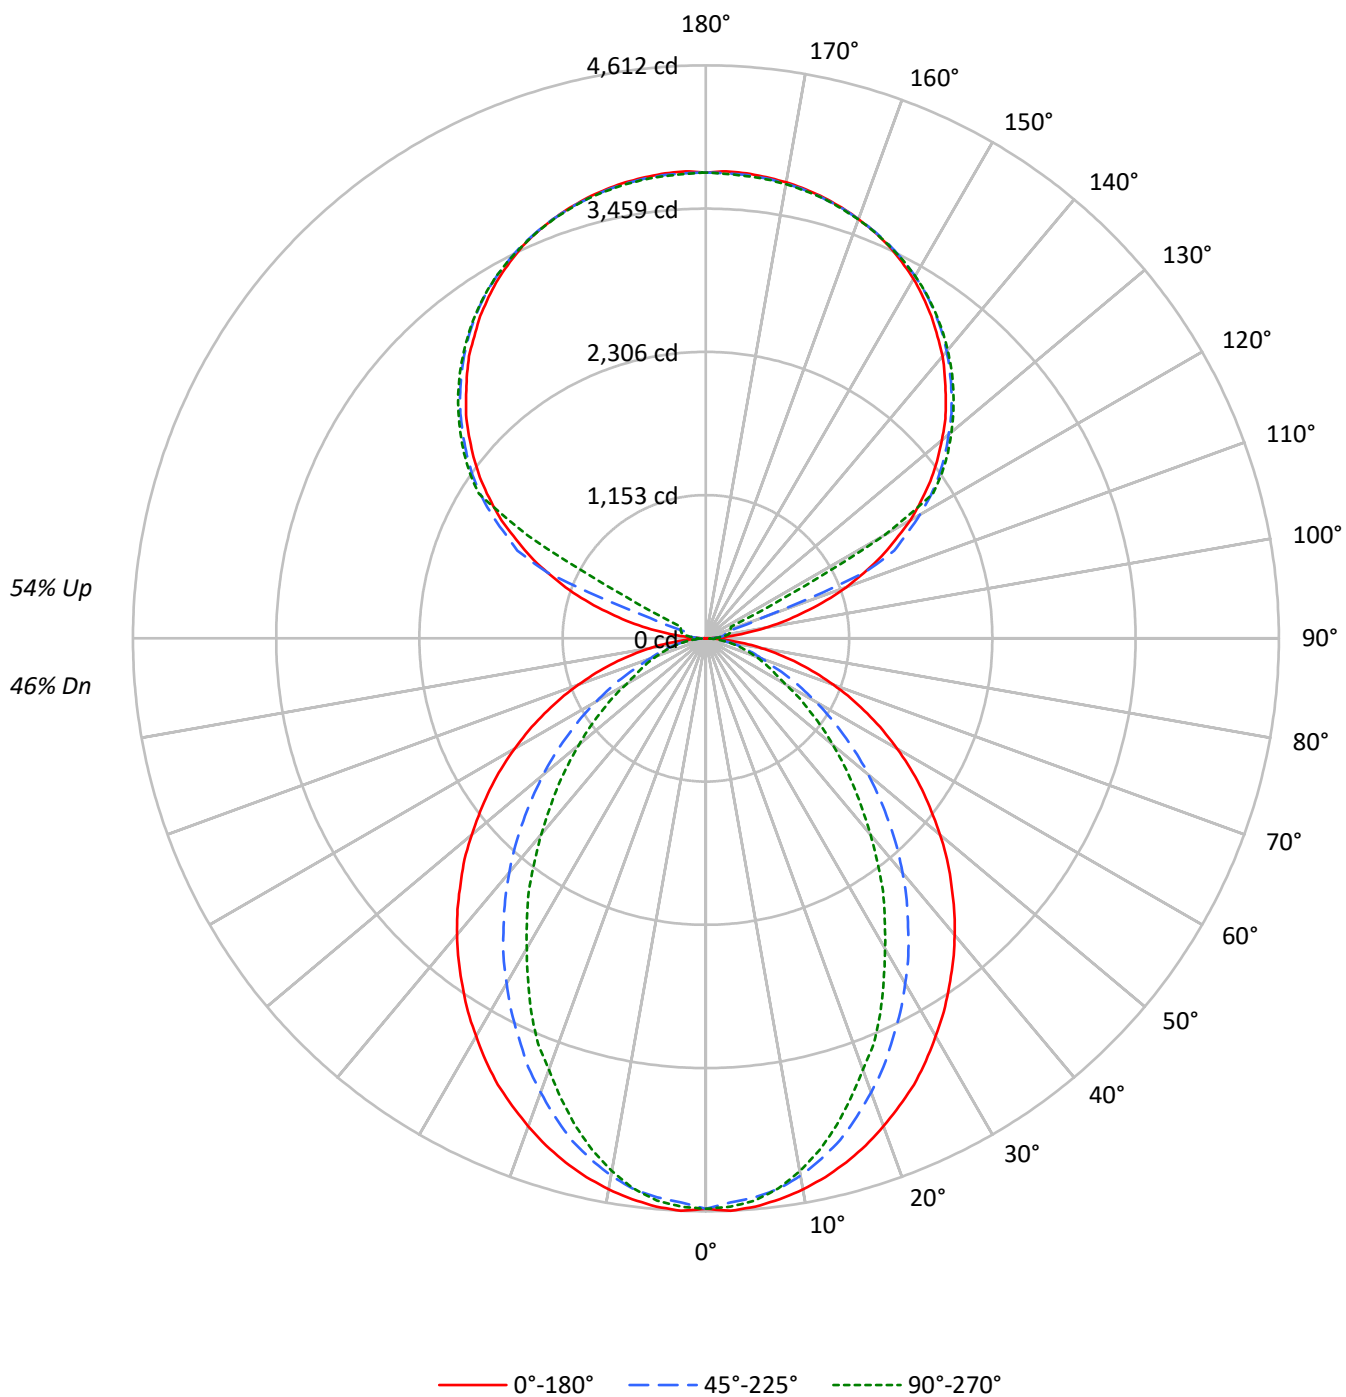

TEST NUMBER: P910281

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US840-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3647	3647	3647
5°	3653	3589	3612
10°	3617	3519	3495
15°	3567	3403	3313
20°	3501	3242	3090
25°	3434	3062	2874
30°	3343	2878	2601
35°	3255	2680	2361
40°	3164	2475	2086
45°	3060	2248	1837
50°	2951	2018	1593
55°	2838	1773	1359
60°	2707	1516	1119
65°	2556	1255	1007
70°	2373	1012	911
75°	2144	892	828
80°	1811	748	718
85°	1262	499	539

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3060 cd/sqm

TEST NUMBER: P910281

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US840-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	430.3	2.1
10°-20°	1181.2	5.8
20°-30°	1658.4	8.1
30°-40°	1807.8	8.8
40°-50°	1661.5	8.1
50°-60°	1304.9	6.4
60°-70°	849.4	4.2
70°-80°	437.2	2.1
80°-90°	118.2	0.6
90°-100°	123.6	0.6
100°-110°	460.8	2.3
110°-120°	1222.2	6.0
120°-130°	2027.1	9.9
130°-140°	2153.3	10.5
140°-150°	2001.2	9.8
150°-160°	1608.9	7.9
160°-170°	1036.7	5.1
170°-180°	356.8	1.7
0°-30°	3269.9	16.0
0°-40°	5077.7	24.8
0°-60°	8044.1	39.4
0°-90°	9448.8	46.2
90°-120°	1806.7	8.8
90°-150°	7988.3	39.1
90°-180°	10991.0	53.8
0°-180°	20439.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4591	4591	4591	4591	4591	
5°	4591	4570	4516	4554	4541	435
15°	4367	4321	4180	4101	4060	1231
25°	3964	3831	3556	3386	3324	1823
35°	3416	3203	2838	2576	2484	2138
45°	2792	2514	2078	1782	1683	2156
55°	2123	1799	1350	1101	1022	1897
65°	1434	1097	723	582	569	1421
75°	764	473	332	303	299	808
85°	178	91	79	79	79	205
90°	3	32	54	68	73	19
95°	176	87	106	120	117	209
105°	825	906	166	195	206	881
115°	1560	1606	1674	418	223	1536
125°	2205	2241	2292	2311	2319	1967
135°	2729	2773	2797	2824	2819	2108
145°	3166	3163	3209	3228	3215	1980
155°	3486	3462	3494	3510	3489	1606
165°	3673	3657	3665	3684	3665	1038
175°	3757	3738	3744	3763	3736	358
180°	3749	3749	3749	3749	3749	

TEST NUMBER: P910281

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US840-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4591.2	4591.2	4591.2	4591.2	4591.2
2.5°	4611.9	4591.2	4545.3	4587.2	4578.8
5°	4591.2	4570.4	4516.2	4553.7	4541.4
7.5°	4553.7	4528.9	4470.8	4487.1	4466.3
10°	4503.9	4474.7	4391.9	4379.1	4354.4
12.5°	4441.7	4404.2	4291.8	4267.1	4221.2
15°	4366.8	4320.9	4179.8	4101.0	4059.5
17.5°	4279.5	4213.0	4038.4	3947.1	3880.5
20°	4179.8	4096.5	3888.9	3785.3	3693.6
22.5°	4071.9	3976.1	3735.1	3594.0	3531.8
25°	3963.8	3830.7	3556.5	3386.4	3323.8
27.5°	3835.2	3693.6	3390.3	3195.0	3099.4
30°	3698.0	3539.8	3207.4	2995.8	2883.4
32.5°	3564.9	3373.6	3033.2	2783.8	2679.8
35°	3415.5	3203.4	2838.0	2576.2	2484.5
37.5°	3270.0	3041.2	2655.0	2368.0	2264.5
40°	3116.1	2867.1	2463.8	2168.8	2060.8
42.5°	2958.3	2692.5	2272.9	1965.2	1861.6
45°	2792.2	2513.6	2077.6	1782.2	1682.6
47.5°	2634.3	2339.5	1890.7	1595.3	1504.1
50°	2459.7	2164.8	1707.8	1420.8	1333.9
52.5°	2289.2	1977.5	1533.2	1259.0	1180.0
55°	2122.9	1799.0	1350.2	1101.2	1022.3
57.5°	1952.9	1620.4	1188.4	955.7	889.1
60°	1778.3	1445.9	1017.8	806.3	739.7
62.5°	1608.1	1275.8	872.4	673.2	640.1
65°	1433.5	1096.7	723.0	581.9	569.1
67.5°	1267.4	930.6	581.9	510.9	498.6
70°	1092.8	768.8	481.8	440.4	423.6
72.5°	926.6	618.9	402.9	369.8	361.4
75°	764.4	473.4	332.3	303.3	299.3
77.5°	602.6	336.4	261.9	245.1	236.7
80°	452.7	241.2	199.2	183.0	183.0
82.5°	315.6	162.2	137.1	128.8	128.8
85°	178.5	91.3	78.9	78.9	78.9
87.5°	66.6	33.0	33.0	29.1	29.1
90°	2.6	32.5	54.1	68.0	73.1
92.5°	68.0	57.1	65.0	70.6	73.1
95°	176.2	86.6	105.6	119.5	116.6
97.5°	317.3	95.0	138.1	146.5	149.2
100°	480.3	108.6	154.6	176.2	181.7
102.5°	659.0	653.9	160.1	189.8	198.1
105°	824.7	906.2	165.6	195.2	206.2
107.5°	1017.3	1084.9	171.1	200.7	211.7
110°	1201.8	1258.6	474.8	203.6	214.2

TEST NUMBER: P910281

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US840-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1375.5	1424.1	1378.1	208.7	217.1
115°	1559.7	1605.8	1673.9	417.8	222.6
117.5°	1719.9	1774.0	1820.4	1432.2	721.5
120°	1899.0	1939.5	1988.5	2021.0	1654.8
122.5°	2050.7	2094.2	2148.6	2164.7	2167.7
125°	2205.3	2240.8	2292.3	2311.3	2319.4
127.5°	2346.4	2384.4	2425.3	2452.4	2455.0
130°	2479.4	2522.9	2552.5	2582.5	2580.0
132.5°	2615.0	2650.5	2680.2	2704.6	2702.1
135°	2729.2	2772.6	2796.7	2824.2	2818.6
137.5°	2848.3	2880.8	2908.2	2935.3	2927.2
140°	2965.0	2986.8	3016.5	3040.9	3027.4
142.5°	3062.8	3081.8	3116.9	3138.6	3125.0
145°	3165.9	3163.0	3209.0	3228.1	3214.6
147.5°	3255.2	3247.1	3293.2	3306.7	3296.1
150°	3342.2	3323.2	3366.6	3382.7	3369.2
152.5°	3415.3	3393.7	3434.2	3450.7	3431.7
155°	3485.9	3461.6	3494.1	3510.3	3488.7
157.5°	3542.8	3521.2	3545.7	3564.7	3542.8
160°	3591.8	3575.3	3591.8	3607.8	3588.9
162.5°	3634.9	3618.9	3632.4	3651.4	3626.9
165°	3673.0	3656.8	3664.9	3683.9	3664.9
167.5°	3702.9	3686.5	3694.9	3713.9	3689.4
170°	3727.4	3711.0	3716.4	3735.5	3711.0
172.5°	3743.5	3727.4	3732.9	3751.9	3727.4
175°	3757.0	3738.0	3743.5	3762.6	3735.5
177.5°	3762.6	3743.5	3746.4	3765.4	3740.9
180°	3749.0	3749.0	3749.0	3749.0	3749.0

TEST NUMBER: P910281

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US840-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.27	12.07	12.27	13.08	14.40	7.25	8.05	8.24	9.05	10.38
	3H	12.95	13.67	13.96	14.68	16.02	8.44	9.15	9.44	10.16	11.51
	4H	13.56	14.23	14.58	15.25	16.60	8.88	9.56	9.90	10.58	11.93
	6H	13.98	14.60	15.01	15.62	16.99	9.21	9.83	10.23	10.85	12.22
	8H	14.10	14.69	15.14	15.73	17.09	9.30	9.89	10.33	10.92	12.29
	12H	14.16	14.73	15.20	15.75	17.14	9.34	9.90	10.38	10.93	12.32
4H	2H	11.29	11.97	12.31	12.98	14.34	7.84	8.52	8.87	9.53	10.89
	3H	13.12	13.68	14.15	14.72	16.09	9.19	9.75	10.22	10.79	12.16
	4H	13.81	14.32	14.85	15.36	16.75	9.74	10.25	10.78	11.29	12.68
	6H	14.32	14.76	15.37	15.82	17.21	10.15	10.60	11.20	11.65	13.04
	8H	14.49	14.91	15.55	15.96	17.36	10.28	10.70	11.33	11.75	13.15
	12H	14.59	14.96	15.66	16.03	17.43	10.35	10.72	11.42	11.79	13.19
8H	4H	13.77	14.18	14.82	15.24	16.64	10.01	10.43	11.06	11.48	12.88
	6H	14.34	14.68	15.41	15.77	17.17	10.53	10.87	11.61	11.97	13.36
	8H	14.55	14.85	15.64	15.93	17.35	10.72	11.02	11.81	12.10	13.52
	12H	14.69	14.95	15.78	16.03	17.49	10.84	11.11	11.93	12.18	13.64
12H	4H	13.72	14.10	14.79	15.16	16.57	10.02	10.39	11.09	11.45	12.86
	6H	14.31	14.61	15.39	15.69	17.11	10.58	10.88	11.66	11.96	13.38
	8H	14.53	14.79	15.62	15.87	17.33	10.79	11.05	11.88	12.13	13.59