

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912755

Luminaire Tested: DFN2DIP-TR4F0-040D110US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912755
REPORT IS A COMBINATION OF REPORTS P902015 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D110US850-FLLONL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16468.6 lumens
Efficiency: N/A
Efficacy: 141.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 116.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912755

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US850-FLLONL

Luminous Intensity Polar Plot

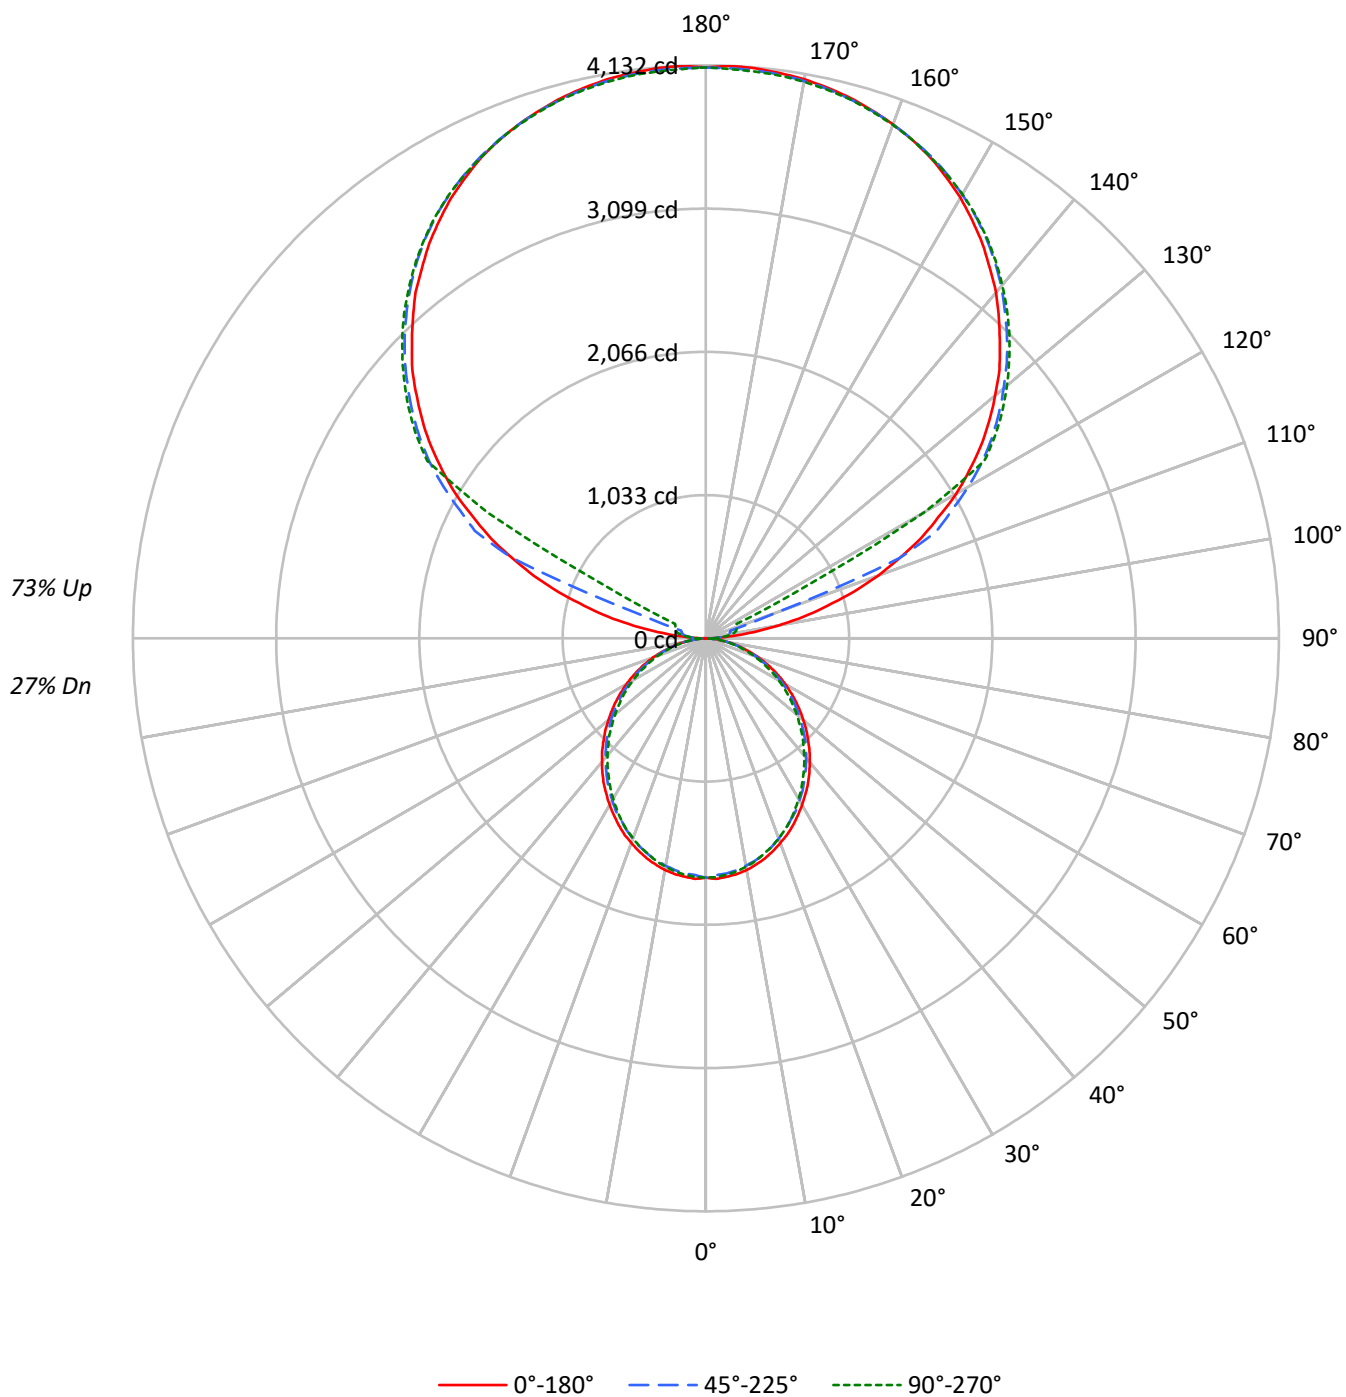

TEST NUMBER: P912755

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US850-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	35	35	35
1	93	88	85	81	82	79	76	73	62	59	58	45	44	43	31	30	29
2	84	77	71	66	75	69	64	60	54	51	48	40	38	36	27	26	25
3	77	68	61	55	68	61	55	50	47	43	40	35	33	30	24	22	21
4	70	60	52	46	62	54	47	42	42	38	34	31	28	26	21	20	18
5	64	53	45	40	57	48	41	36	38	33	29	28	25	22	19	17	16
6	59	48	40	34	53	43	36	31	34	29	25	25	22	19	17	15	14
7	55	43	35	30	49	39	32	27	30	26	22	23	20	17	16	14	12
8	50	39	31	26	45	35	28	24	28	23	19	21	18	15	15	12	11
9	47	35	28	23	42	32	25	21	25	21	17	19	16	14	13	11	10
10	44	32	25	21	39	29	23	19	23	19	15	18	14	12	12	10	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1371	1371	1371
5°	1373	1352	1361
10°	1362	1334	1343
15°	1342	1312	1314
20°	1315	1281	1284
25°	1288	1245	1250
30°	1255	1211	1207
35°	1223	1171	1161
40°	1183	1130	1117
45°	1144	1090	1073
50°	1101	1047	1021
55°	1056	998	973
60°	1005	940	919
65°	950	879	855
70°	880	805	785
75°	782	717	721
80°	664	604	599
85°	481	410	397

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2185 cd/sqm

TEST NUMBER: P912755

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.5	1.0
10°-20°	457.1	2.8
20°-30°	671.7	4.1
30°-40°	780.2	4.7
40°-50°	779.2	4.7
50°-60°	679.5	4.1
60°-70°	502.3	3.0
70°-80°	284.2	1.7
80°-90°	82.2	0.5
90°-100°	135.7	0.8
100°-110°	506.1	3.1
110°-120°	1342.2	8.1
120°-130°	2226.1	13.5
130°-140°	2364.7	14.4
140°-150°	2197.7	13.3
150°-160°	1766.9	10.7
160°-170°	1138.5	6.9
170°-180°	391.9	2.4
0°-30°	1291.3	7.8
0°-40°	2071.5	12.6
0°-60°	3530.2	21.4
0°-90°	4398.9	26.7
90°-120°	1984.0	12.0
90°-150°	8772.5	53.3
90°-180°	12070.0	73.3
0°-180°	16468.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	3	36	59	75	80	15
95°	194	95	116	131	128	229
105°	906	995	182	214	226	968
115°	1713	1763	1838	459	244	1686
125°	2422	2461	2517	2538	2547	2160
135°	2997	3045	3071	3101	3095	2315
145°	3477	3474	3524	3545	3530	2174
155°	3828	3801	3837	3855	3831	1764
165°	4034	4016	4025	4046	4025	1140
175°	4126	4105	4111	4132	4102	393
180°	4117	4117	4117	4117	4117	

TEST NUMBER: P912755

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	2.9	35.7	59.4	74.6	80.3
92.5°	74.6	62.7	71.4	77.5	80.3
95°	193.5	95.2	116.0	131.2	128.1
97.5°	348.4	104.4	151.7	160.9	163.8
100°	527.4	119.2	169.8	193.5	199.5
102.5°	723.7	718.1	175.8	208.4	217.6
105°	905.6	995.1	181.9	214.4	226.5
107.5°	1117.2	1191.4	187.9	220.4	232.4
110°	1319.8	1382.1	521.5	223.6	235.2

TEST NUMBER: P912755

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1510.6	1563.9	1513.3	229.2	238.4
115°	1712.9	1763.4	1838.2	458.8	244.4
117.5°	1888.7	1948.2	1999.1	1572.8	792.4
120°	2085.4	2129.9	2183.7	2219.4	1817.2
122.5°	2252.0	2299.7	2359.5	2377.3	2380.5
125°	2421.8	2460.8	2517.3	2538.2	2547.0
127.5°	2576.8	2618.5	2663.4	2693.1	2696.0
130°	2722.8	2770.6	2803.1	2836.0	2833.3
132.5°	2871.8	2910.7	2943.3	2970.1	2967.4
135°	2997.1	3044.8	3071.3	3101.4	3095.3
137.5°	3127.9	3163.6	3193.7	3223.4	3214.5
140°	3256.0	3280.0	3312.6	3339.4	3324.6
142.5°	3363.5	3384.3	3422.9	3446.7	3431.8
145°	3476.7	3473.5	3524.1	3545.0	3530.2
147.5°	3574.8	3565.9	3616.4	3631.3	3619.7
150°	3670.2	3649.4	3697.1	3714.8	3700.0
152.5°	3750.5	3726.8	3771.4	3789.5	3768.6
155°	3828.0	3801.4	3837.1	3854.9	3831.2
157.5°	3890.6	3866.9	3893.8	3914.7	3890.6
160°	3944.4	3926.3	3944.4	3962.0	3941.2
162.5°	3991.7	3974.1	3989.0	4009.8	3983.0
165°	4033.5	4015.8	4024.7	4045.5	4024.7
167.5°	4066.4	4048.4	4057.6	4078.5	4051.6
170°	4093.3	4075.2	4081.2	4102.2	4075.2
172.5°	4111.0	4093.3	4099.3	4120.2	4093.3
175°	4125.8	4105.0	4111.0	4131.9	4102.2
177.5°	4131.9	4111.0	4114.2	4135.0	4108.2
180°	4117.1	4117.1	4117.1	4117.1	4117.1

TEST NUMBER: P912755

CATALOG NUMBER: DFN2DIP-TR4F0-040D110US850-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.68	6.36	6.81	7.49	9.06	5.25	5.93	6.38	7.06	8.63
	3H	7.33	7.94	8.47	9.07	10.66	6.85	7.47	8.00	8.60	10.18
	4H	7.90	8.49	9.06	9.62	11.21	7.43	8.01	8.58	9.15	10.74
	6H	8.29	8.83	9.45	9.97	11.57	7.82	8.36	8.98	9.49	11.09
	8H	8.39	8.90	9.56	10.06	11.65	7.92	8.43	9.08	9.58	11.17
	12H	8.44	8.92	9.60	10.07	11.68	7.96	8.44	9.12	9.59	11.20
4H	2H	6.12	6.70	7.28	7.84	9.43	5.77	6.36	6.93	7.49	9.08
	3H	7.97	8.45	9.13	9.61	11.22	7.58	8.06	8.74	9.22	10.82
	4H	8.68	9.12	9.84	10.27	11.89	8.27	8.72	9.44	9.87	11.49
	6H	9.18	9.56	10.35	10.73	12.34	8.77	9.15	9.94	10.32	11.94
	8H	9.33	9.68	10.50	10.85	12.47	8.91	9.27	10.08	10.43	12.06
	12H	9.39	9.71	10.58	10.89	12.52	8.97	9.29	10.15	10.47	12.10
8H	4H	8.86	9.22	10.03	10.38	12.01	8.50	8.86	9.67	10.02	11.65
	6H	9.48	9.78	10.67	10.98	12.61	9.12	9.41	10.31	10.62	12.24
	8H	9.70	9.96	10.90	11.14	12.78	9.33	9.59	10.53	10.77	12.42
	12H	9.82	10.05	11.02	11.23	12.91	9.44	9.67	10.64	10.85	12.52
12H	4H	8.83	9.16	10.02	10.33	11.97	8.48	8.81	9.67	9.98	11.61
	6H	9.51	9.77	10.71	10.95	12.59	9.16	9.42	10.35	10.60	12.24
	8H	9.74	9.97	10.94	11.15	12.83	9.39	9.61	10.59	10.79	12.47

END OF REPORT