

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912801

Luminaire Tested: DFN2DIP-TR4F0-060D040US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912801
REPORT IS A COMBINATION OF REPORTS P901894 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-060D040US850-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10047.6 lumens
Efficiency: N/A
Efficacy: 120.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 83.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912801

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US850-RLLONL

Luminous Intensity Polar Plot

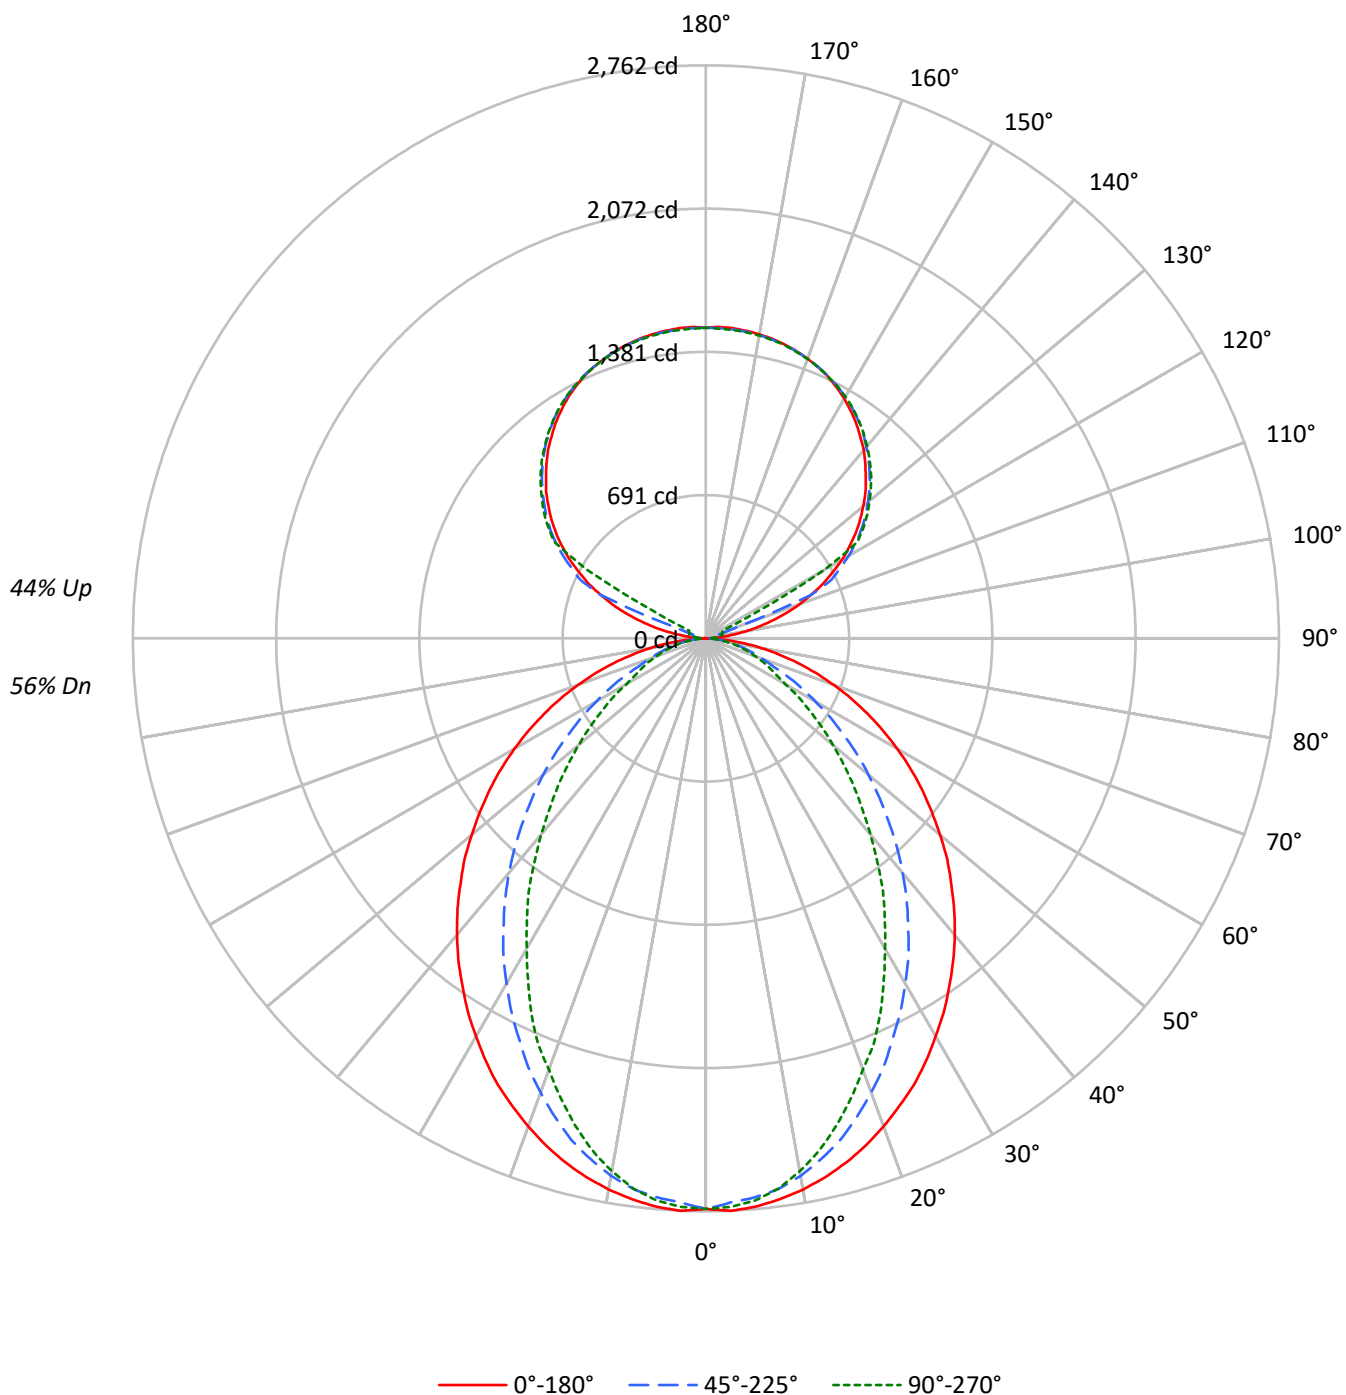

TEST NUMBER: P912801

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	109	109	109	109		101	101	101	101		87	87	87		74	74	74		62	62	62
1	100	96	92	88		93	89	86	83		77	75	72		66	64	63		56	54	53
2	91	84	78	73		85	79	73	69		68	64	61		58	56	53		50	48	46
3	84	74	67	62		78	70	63	58		61	56	52		52	49	46		44	42	40
4	77	66	59	53		71	62	55	50		54	49	45		47	43	40		40	37	35
5	71	59	51	46		66	56	49	43		49	43	39		42	38	35		36	33	31
6	65	54	46	40		61	50	43	38		44	39	34		39	34	31		33	30	27
7	61	49	41	35		56	46	39	34		40	35	30		35	31	27		30	27	24
8	56	44	37	31		52	42	35	30		37	31	27		32	28	25		28	25	22
9	53	41	33	28		49	38	32	27		34	28	25		30	25	22		26	23	20
10	49	37	30	25		46	35	29	24		31	26	22		28	23	20		24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2185	2185	2185
5°	2188	2150	2164
10°	2167	2108	2093
15°	2137	2038	1984
20°	2097	1942	1851
25°	2057	1834	1722
30°	2003	1724	1558
35°	1950	1605	1414
40°	1896	1482	1250
45°	1833	1346	1100
50°	1768	1209	954
55°	1700	1062	814
60°	1621	908	670
65°	1531	752	603
70°	1422	606	546
75°	1284	534	496
80°	1085	448	430
85°	756	299	323

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1833 cd/sqm

TEST NUMBER: P912801

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.7	2.6
10°-20°	707.6	7.0
20°-30°	993.4	9.9
30°-40°	1082.8	10.8
40°-50°	995.2	9.9
50°-60°	781.6	7.8
60°-70°	508.8	5.1
70°-80°	261.9	2.6
80°-90°	69.5	0.7
90°-100°	49.4	0.5
100°-110°	184.0	1.8
110°-120°	488.1	4.9
120°-130°	809.5	8.1
130°-140°	859.9	8.6
140°-150°	799.2	8.0
150°-160°	642.5	6.4
160°-170°	414.0	4.1
170°-180°	142.5	1.4
0°-30°	1958.7	19.5
0°-40°	3041.5	30.3
0°-60°	4818.4	48.0
0°-90°	5658.6	56.3
90°-120°	721.5	7.2
90°-150°	3190.0	31.7
90°-180°	4389.0	43.7
0°-180°	10047.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2750	2750	2750	2750	2750	
5°	2750	2738	2705	2728	2720	261
15°	2616	2588	2504	2456	2432	737
25°	2374	2295	2130	2028	1991	1092
35°	2046	1919	1700	1543	1488	1281
45°	1672	1506	1244	1068	1008	1292
55°	1272	1078	809	660	612	1136
65°	859	657	433	349	341	851
75°	458	284	199	182	179	484
85°	107	55	47	47	47	123
90°	1	13	22	27	29	9
95°	70	35	42	48	47	83
105°	329	362	66	78	82	352
115°	623	641	668	167	89	613
125°	881	895	915	923	926	785
135°	1090	1107	1117	1128	1126	842
145°	1264	1263	1281	1289	1284	791
155°	1392	1382	1395	1402	1393	641
165°	1467	1460	1464	1471	1464	414
175°	1500	1493	1495	1502	1492	143
180°	1497	1497	1497	1497	1497	

TEST NUMBER: P912801

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2750.1	2750.1	2750.1	2750.1	2750.1
2.5°	2762.5	2750.1	2722.6	2747.7	2742.7
5°	2750.1	2737.7	2705.2	2727.7	2720.3
7.5°	2727.7	2712.8	2678.0	2687.8	2675.4
10°	2697.8	2680.3	2630.8	2623.1	2608.3
12.5°	2660.6	2638.1	2570.8	2556.0	2528.5
15°	2615.7	2588.2	2503.7	2456.4	2431.6
17.5°	2563.5	2523.5	2419.0	2364.3	2324.5
20°	2503.7	2453.8	2329.5	2267.4	2212.5
22.5°	2439.0	2381.7	2237.3	2152.8	2115.5
25°	2374.4	2294.6	2130.4	2028.5	1991.0
27.5°	2297.3	2212.5	2030.8	1913.8	1856.6
30°	2215.1	2120.3	1921.2	1794.5	1727.2
32.5°	2135.4	2020.8	1817.0	1667.5	1605.2
35°	2045.9	1918.9	1700.0	1543.1	1488.2
37.5°	1958.7	1821.6	1590.4	1418.5	1356.4
40°	1866.6	1717.4	1475.7	1299.1	1234.4
42.5°	1772.1	1612.8	1361.4	1177.1	1115.1
45°	1672.5	1505.6	1244.5	1067.5	1007.9
47.5°	1578.0	1401.3	1132.5	955.6	901.0
50°	1473.4	1296.8	1022.9	851.0	799.0
52.5°	1371.2	1184.5	918.4	754.1	706.9
55°	1271.7	1077.6	808.8	659.6	612.3
57.5°	1169.8	970.6	711.9	572.5	532.5
60°	1065.2	866.1	609.7	483.0	443.0
62.5°	963.3	764.2	522.6	403.2	383.4
65°	858.7	657.0	433.1	348.6	340.9
67.5°	759.1	557.4	348.6	306.1	298.7
70°	654.5	460.5	288.6	263.8	253.7
72.5°	555.1	370.7	241.3	221.6	216.5
75°	457.9	283.6	199.1	181.7	179.3
77.5°	361.0	201.5	156.8	146.8	141.8
80°	271.2	144.4	119.3	109.6	109.6
82.5°	189.1	97.1	82.1	77.1	77.1
85°	106.9	54.7	47.2	47.2	47.2
87.5°	39.9	19.9	19.9	17.4	17.4
90°	1.0	13.0	21.6	27.2	29.2
92.5°	27.2	22.7	26.0	28.2	29.2
95°	70.3	34.6	42.1	47.7	46.6
97.5°	126.8	37.9	55.2	58.6	59.6
100°	191.7	43.4	61.8	70.3	72.5
102.5°	263.2	261.2	63.9	75.7	79.1
105°	329.3	361.9	66.1	78.0	82.3
107.5°	406.2	433.3	68.3	80.2	84.5
110°	480.0	502.6	189.6	81.3	85.5

TEST NUMBER: P912801

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	549.3	568.7	550.3	83.4	86.7
115°	622.8	641.2	668.4	166.8	88.9
117.5°	686.8	708.4	726.9	571.9	288.1
120°	758.3	774.5	794.0	807.1	660.9
122.5°	818.9	836.3	858.0	864.5	865.6
125°	880.7	894.9	915.4	923.0	926.2
127.5°	937.0	952.2	968.5	979.4	980.4
130°	990.1	1007.5	1019.3	1031.3	1030.3
132.5°	1044.2	1058.4	1070.3	1080.1	1079.1
135°	1089.8	1107.2	1116.9	1127.7	1125.6
137.5°	1137.4	1150.4	1161.3	1172.1	1168.9
140°	1184.0	1192.7	1204.6	1214.4	1208.9
142.5°	1223.1	1230.7	1244.7	1253.3	1248.0
145°	1264.3	1263.2	1281.4	1289.1	1283.7
147.5°	1299.9	1296.6	1315.1	1320.5	1316.3
150°	1334.6	1327.0	1344.4	1350.9	1345.4
152.5°	1363.8	1355.2	1371.4	1377.9	1370.4
155°	1392.0	1382.4	1395.3	1401.8	1393.1
157.5°	1414.8	1406.1	1416.0	1423.5	1414.8
160°	1434.3	1427.7	1434.3	1440.7	1433.2
162.5°	1451.6	1445.1	1450.6	1458.1	1448.4
165°	1466.8	1460.3	1463.5	1471.1	1463.5
167.5°	1478.7	1472.1	1475.5	1483.1	1473.3
170°	1488.5	1482.0	1484.1	1491.7	1482.0
172.5°	1494.9	1488.5	1490.7	1498.3	1488.5
175°	1500.3	1492.7	1494.9	1502.5	1491.7
177.5°	1502.5	1494.9	1496.0	1503.7	1493.9
180°	1497.2	1497.2	1497.2	1497.2	1497.2

TEST NUMBER: P912801

CATALOG NUMBER: DFN2DIP-TR4F0-060D040US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.43	11.31	11.34	12.23	13.42	6.40	7.29	7.31	8.21	9.39
	3H	12.11	12.90	13.03	13.83	15.04	7.60	8.39	8.52	9.32	10.52
	4H	12.72	13.47	13.66	14.40	15.62	8.05	8.80	8.98	9.73	10.95
	6H	13.14	13.83	14.09	14.77	16.00	8.37	9.06	9.32	10.00	11.23
	8H	13.27	13.93	14.23	14.89	16.11	8.47	9.12	9.42	10.08	11.31
	12H	13.34	13.96	14.29	14.91	16.16	8.51	9.13	9.47	10.09	11.34
4H	2H	10.45	11.20	11.39	12.14	13.35	7.00	7.75	7.94	8.69	9.90
	3H	12.29	12.91	13.24	13.87	15.10	8.36	8.98	9.31	9.95	11.18
	4H	12.98	13.55	13.94	14.51	15.76	8.91	9.48	9.87	10.44	11.69
	6H	13.50	13.99	14.47	14.97	16.22	9.33	9.82	10.31	10.81	12.06
	8H	13.68	14.13	14.65	15.11	16.38	9.46	9.92	10.44	10.90	12.16
	12H	13.77	14.18	14.77	15.18	16.45	9.53	9.94	10.53	10.94	12.21
8H	4H	12.95	13.41	13.93	14.39	15.65	9.19	9.65	10.17	10.63	11.89
	6H	13.52	13.90	14.52	14.92	16.18	9.72	10.09	10.72	11.11	12.38
	8H	13.74	14.07	14.75	15.08	16.36	9.91	10.24	10.92	11.25	12.53
	12H	13.88	14.17	14.89	15.17	16.50	10.03	10.32	11.04	11.32	12.65
12H	4H	12.91	13.32	13.90	14.31	15.58	9.20	9.61	10.19	10.61	11.88
	6H	13.50	13.83	14.50	14.84	16.12	9.77	10.10	10.77	11.11	12.39
	8H	13.72	14.01	14.73	15.01	16.34	9.98	10.27	10.99	11.27	12.60

END OF REPORT