

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912824

Luminaire Tested: DFN2DIP-TR4F0-060D100US850-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P912824  
REPORT IS A COMBINATION OF REPORTS P900482 AND P897293  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-060D100US850-RLLFLL  
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 15470.6 lumens  
Efficiency: N/A  
Efficacy: 119.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 129.7  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9781  
Total Harmonic Distortion (THDi): 0.075  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P912824  
CATALOG NUMBER: DFN2DIP-TR4F0-060D100US850-RLLFLL

### Luminous Intensity Polar Plot

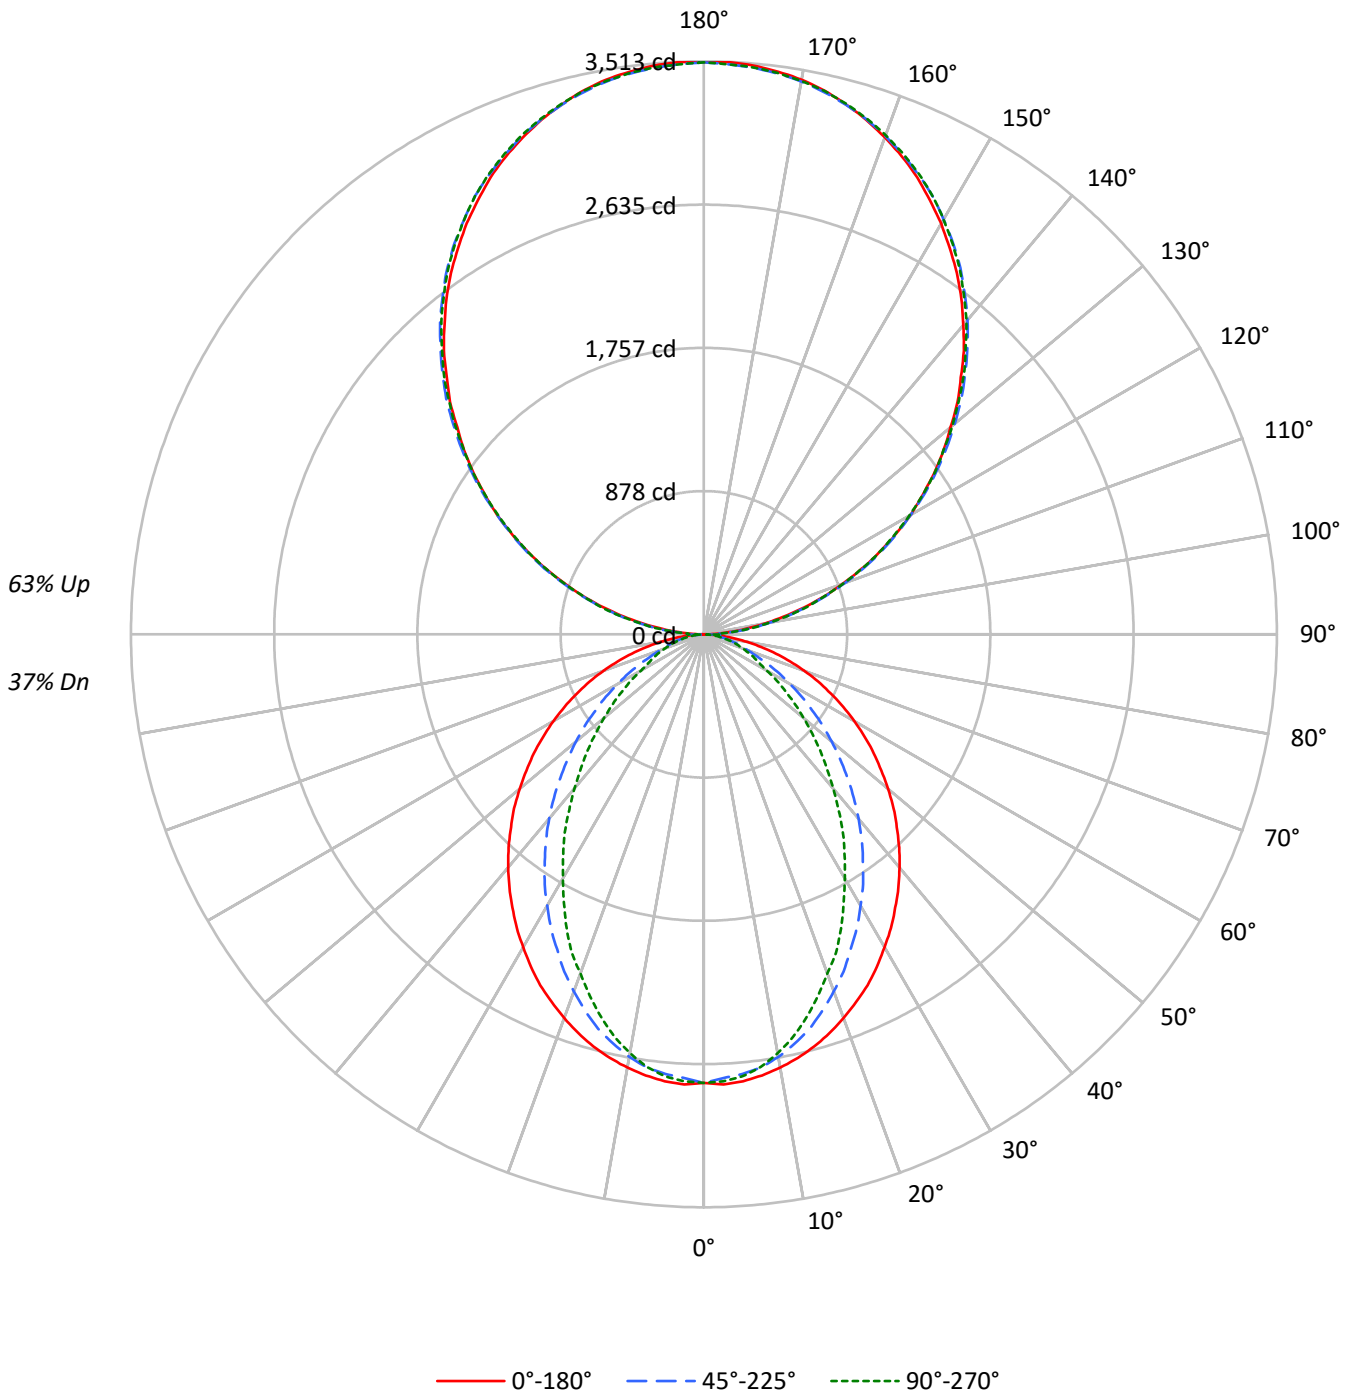



TEST NUMBER: P912824

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US850-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37				37
1	95	91	87	84	86	83	80	77	67	65	63	53	51	50	39	38	38	32				32
2	87	80	74	69	79	73	68	63	59	56	53	47	44	42	35	34	32	27				27
3	79	70	64	58	72	64	58	53	52	48	45	41	39	36	31	29	28	23				23
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24	20				20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	26	23	21	18				18
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19	16				16
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17	14				14
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15	13				13
9	49	38	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14	12				12
10	46	34	27	23	42	32	25	21	26	22	18	22	18	16	17	14	13	11				11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2185	2185	2185
5°	2188	2150	2164
10°	2167	2108	2093
15°	2137	2038	1984
20°	2097	1942	1851
25°	2057	1834	1722
30°	2003	1724	1558
35°	1950	1605	1414
40°	1896	1482	1250
45°	1833	1346	1100
50°	1768	1209	954
55°	1700	1062	814
60°	1621	908	670
65°	1531	752	603
70°	1422	606	546
75°	1284	534	496
80°	1085	448	430
85°	756	299	323

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 2735 cd/sqm



TEST NUMBER: P912824

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US850-RLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	257.7	1.7
10°-20°	707.6	4.6
20°-30°	993.4	6.4
30°-40°	1082.8	7.0
40°-50°	995.2	6.4
50°-60°	781.6	5.1
60°-70°	508.8	3.3
70°-80°	261.9	1.7
80°-90°	76.8	0.5
90°-100°	217.0	1.4
100°-110°	689.6	4.5
110°-120°	1180.1	7.6
120°-130°	1552.0	10.0
130°-140°	1742.1	11.3
140°-150°	1708.3	11.0
150°-160°	1433.0	9.3
160°-170°	950.4	6.1
170°-180°	332.2	2.1
0°-30°	1958.7	12.7
0°-40°	3041.5	19.7
0°-60°	4818.4	31.1
0°-90°	5665.9	36.6
90°-120°	2086.7	13.5
90°-150°	7089.1	45.8
90°-180°	9805.0	63.4
0°-180°	15470.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2750	2750	2750	2750	2750	
5°	2750	2738	2705	2728	2720	261
15°	2616	2588	2504	2456	2432	737
25°	2374	2295	2130	2028	1991	1092
35°	2046	1919	1700	1543	1488	1281
45°	1672	1506	1244	1068	1008	1292
55°	1272	1078	809	660	612	1136
65°	859	657	433	349	341	851
75°	458	284	199	182	179	484
85°	107	55	47	47	47	123
90°	3	38	104	97	100	15
95°	154	184	189	189	184	172
105°	637	645	651	657	657	672
115°	1184	1201	1196	1193	1184	1171
125°	1722	1749	1740	1731	1728	1539
135°	2228	2261	2267	2264	2255	1722
145°	2705	2726	2743	2746	2734	1690
155°	3093	3101	3111	3126	3116	1424
165°	3365	3361	3361	3383	3368	949
175°	3501	3493	3486	3507	3489	333
180°	3507	3507	3507	3507	3507	



TEST NUMBER: P912824

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US850-RLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2750.1	2750.1	2750.1	2750.1	2750.1
2.5°	2762.5	2750.1	2722.6	2747.7	2742.7
5°	2750.1	2737.7	2705.2	2727.7	2720.3
7.5°	2727.7	2712.8	2678.0	2687.8	2675.4
10°	2697.8	2680.3	2630.8	2623.1	2608.3
12.5°	2660.6	2638.1	2570.8	2556.0	2528.5
15°	2615.7	2588.2	2503.7	2456.4	2431.6
17.5°	2563.5	2523.5	2419.0	2364.3	2324.5
20°	2503.7	2453.8	2329.5	2267.4	2212.5
22.5°	2439.0	2381.7	2237.3	2152.8	2115.5
25°	2374.4	2294.6	2130.4	2028.5	1991.0
27.5°	2297.3	2212.5	2030.8	1913.8	1856.6
30°	2215.1	2120.3	1921.2	1794.5	1727.2
32.5°	2135.4	2020.8	1817.0	1667.5	1605.2
35°	2045.9	1918.9	1700.0	1543.1	1488.2
37.5°	1958.7	1821.6	1590.4	1418.5	1356.4
40°	1866.6	1717.4	1475.7	1299.1	1234.4
42.5°	1772.1	1612.8	1361.4	1177.1	1115.1
45°	1672.5	1505.6	1244.5	1067.5	1007.9
47.5°	1578.0	1401.3	1132.5	955.6	901.0
50°	1473.4	1296.8	1022.9	851.0	799.0
52.5°	1371.2	1184.5	918.4	754.1	706.9
55°	1271.7	1077.6	808.8	659.6	612.3
57.5°	1169.8	970.6	711.9	572.5	532.5
60°	1065.2	866.1	609.7	483.0	443.0
62.5°	963.3	764.2	522.6	403.2	383.4
65°	858.7	657.0	433.1	348.6	340.9
67.5°	759.1	557.4	348.6	306.1	298.7
70°	654.5	460.5	288.6	263.8	253.7
72.5°	555.1	370.7	241.3	221.6	216.5
75°	457.9	283.6	199.1	181.7	179.3
77.5°	361.0	201.5	156.8	146.8	141.8
80°	271.2	144.4	119.3	109.6	109.6
82.5°	189.1	97.1	82.1	77.1	77.1
85°	106.9	54.7	47.2	47.2	47.2
87.5°	39.9	19.9	19.9	17.4	17.4
90°	3.2	38.0	103.6	97.3	100.5
92.5°	65.5	88.8	92.0	95.2	95.2
95°	154.4	184.0	189.3	189.3	184.0
97.5°	257.0	284.5	296.1	296.1	296.1
100°	375.4	399.7	408.1	408.1	405.0
102.5°	500.2	518.1	529.8	532.9	529.8
105°	636.6	645.0	651.3	656.6	656.6
107.5°	771.9	784.6	784.6	786.7	771.9
110°	903.1	919.9	919.9	919.9	911.5



TEST NUMBER: P912824

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US850-RLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1044.7	1062.6	1059.5	1051.0	1044.7
115°	1184.3	1201.2	1195.9	1192.7	1184.3
117.5°	1322.8	1346.1	1331.2	1322.8	1314.3
120°	1462.3	1485.6	1462.3	1462.3	1452.9
122.5°	1589.2	1618.8	1604.1	1595.6	1589.2
125°	1722.5	1748.9	1740.5	1730.9	1727.8
127.5°	1852.6	1885.3	1873.7	1861.0	1852.6
130°	1974.1	2012.2	2007.0	2000.5	1989.0
132.5°	2110.5	2140.1	2142.3	2127.5	2119.0
135°	2227.9	2260.7	2267.0	2263.9	2255.4
137.5°	2359.1	2385.5	2390.8	2388.7	2375.9
140°	2474.3	2500.7	2515.5	2515.5	2503.9
142.5°	2592.7	2619.1	2627.6	2630.8	2619.1
145°	2704.7	2725.9	2742.9	2746.0	2734.4
147.5°	2805.2	2831.7	2844.4	2849.7	2838.0
150°	2908.9	2926.9	2938.5	2947.9	2938.5
152.5°	3000.8	3018.8	3033.7	3045.3	3033.7
155°	3092.9	3101.3	3110.9	3125.6	3116.1
157.5°	3172.2	3178.5	3183.8	3204.9	3190.1
160°	3243.0	3249.4	3252.5	3270.4	3257.8
162.5°	3308.6	3308.6	3311.7	3331.8	3317.0
165°	3364.6	3361.4	3361.4	3382.6	3367.8
167.5°	3415.4	3405.8	3405.8	3427.0	3412.2
170°	3453.4	3445.0	3441.8	3463.0	3445.0
172.5°	3479.8	3471.4	3468.2	3489.4	3471.4
175°	3501.0	3492.6	3486.3	3507.3	3489.4
177.5°	3512.6	3504.2	3497.8	3515.8	3497.8
180°	3507.3	3507.3	3507.3	3507.3	3507.3



TEST NUMBER: P912824  
 CATALOG NUMBER: DFN2DIP-TR4F0-060D100US850-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.46	9.19	9.53	10.26	11.71	4.43	5.17	5.50	6.23	7.69
	3H	10.13	10.78	11.21	11.86	13.33	5.62	6.27	6.70	7.35	8.82
	4H	10.73	11.35	11.82	12.43	13.91	6.06	6.68	7.15	7.76	9.24
	6H	11.15	11.72	12.25	12.80	14.29	6.38	6.95	7.48	8.03	9.52
	8H	11.27	11.82	12.38	12.91	14.40	6.47	7.01	7.57	8.11	9.59
	12H	11.33	11.85	12.44	12.94	14.44	6.51	7.02	7.62	8.11	9.62
4H	2H	8.47	9.09	9.56	10.17	11.64	5.02	5.64	6.11	6.72	8.19
	3H	10.29	10.80	11.39	11.91	13.40	6.36	6.88	7.46	7.98	9.47
	4H	10.98	11.45	12.08	12.54	14.05	6.90	7.38	8.01	8.47	9.98
	6H	11.48	11.89	12.60	13.01	14.51	7.32	7.73	8.44	8.84	10.35
	8H	11.66	12.04	12.77	13.15	14.67	7.45	7.83	8.56	8.94	10.45
	12H	11.75	12.09	12.88	13.21	14.74	7.51	7.85	8.64	8.97	10.50
8H	4H	10.94	11.31	12.05	12.42	13.94	7.18	7.56	8.29	8.67	10.18
	6H	11.50	11.81	12.63	12.96	14.48	7.69	8.01	8.83	9.16	10.67
	8H	11.71	11.99	12.86	13.12	14.66	7.88	8.16	9.03	9.29	10.83
	12H	11.85	12.09	12.99	13.22	14.79	8.00	8.24	9.15	9.37	10.94
12H	4H	10.88	11.23	12.01	12.35	13.87	7.18	7.52	8.31	8.64	10.17
	6H	11.47	11.75	12.62	12.88	14.42	7.74	8.02	8.88	9.15	10.68
	8H	11.69	11.93	12.84	13.06	14.63	7.95	8.19	9.09	9.32	10.89