

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912864

Luminaire Tested: DFN2DIP-TR4F0-070D110US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912864
REPORT IS A COMBINATION OF REPORTS P900502 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-070D110US850-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17394.6 lumens
Efficiency: N/A
Efficacy: 115.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 150.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912864

CATALOG NUMBER: DFN2DIP-TR4F0-070D110US850-RLLFLL

Luminous Intensity Polar Plot

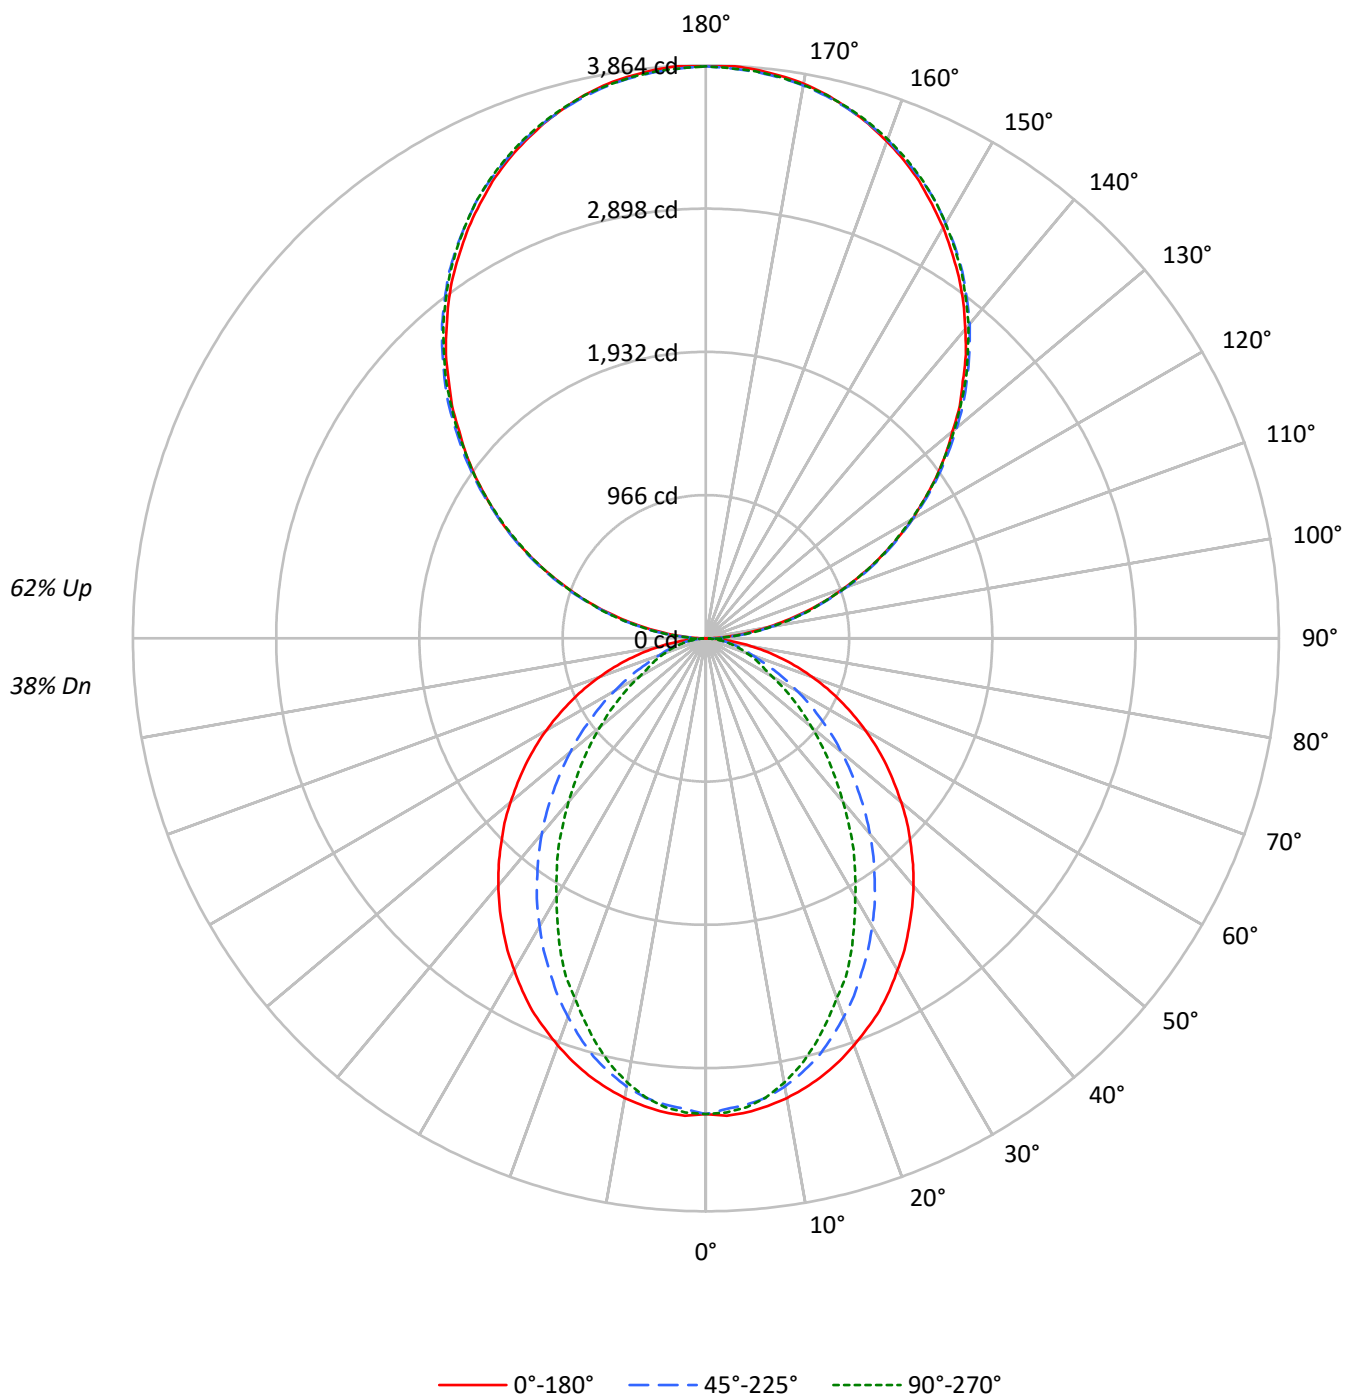

TEST NUMBER: P912864

CATALOG NUMBER: DFN2DIP-TR4F0-070D110US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45
1	95	91	88	84	87	83	80	77	68	66	64	53	52	51	40	40	39
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33
3	80	71	64	58	72	65	59	54	53	49	45	42	39	37	32	30	29
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25
5	67	56	48	43	61	51	45	40	42	37	34	34	30	28	26	24	22
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	21	20
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14
10	46	35	28	23	42	32	26	22	27	22	19	22	18	16	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2549	2549	2549
5°	2553	2508	2524
10°	2528	2459	2442
15°	2493	2378	2315
20°	2447	2266	2159
25°	2400	2140	2009
30°	2337	2011	1818
35°	2275	1873	1650
40°	2211	1730	1458
45°	2138	1571	1284
50°	2062	1410	1113
55°	1983	1239	950
60°	1892	1059	782
65°	1786	877	704
70°	1659	707	636
75°	1498	623	579
80°	1266	523	502
85°	883	349	377

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3007 cd/sqm

TEST NUMBER: P912864

CATALOG NUMBER: DFN2DIP-TR4F0-070D110US850-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	300.7	1.7
10°-20°	825.5	4.7
20°-30°	1158.9	6.7
30°-40°	1263.3	7.3
40°-50°	1161.1	6.7
50°-60°	911.9	5.2
60°-70°	593.5	3.4
70°-80°	305.5	1.8
80°-90°	88.9	0.5
90°-100°	238.7	1.4
100°-110°	758.6	4.4
110°-120°	1298.1	7.5
120°-130°	1707.2	9.8
130°-140°	1916.3	11.0
140°-150°	1879.1	10.8
150°-160°	1576.3	9.1
160°-170°	1045.4	6.0
170°-180°	365.4	2.1
0°-30°	2285.1	13.1
0°-40°	3548.4	20.4
0°-60°	5621.4	32.3
0°-90°	6609.5	38.0
90°-120°	2295.4	13.2
90°-150°	7798.0	44.8
90°-180°	10785.0	62.0
0°-180°	17394.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3208	3208	3208	3208	3208	
5°	3208	3194	3156	3182	3174	304
15°	3052	3020	2921	2866	2837	860
25°	2770	2677	2485	2366	2323	1274
35°	2387	2239	1983	1800	1736	1494
45°	1951	1756	1452	1246	1176	1507
55°	1484	1257	944	770	714	1326
65°	1002	766	505	407	398	993
75°	534	331	232	212	209	565
85°	125	64	55	55	55	143
90°	3	42	114	107	110	17
95°	170	202	208	208	202	189
105°	700	710	716	722	722	739
115°	1303	1321	1316	1312	1303	1288
125°	1895	1924	1914	1904	1900	1693
135°	2451	2487	2494	2490	2481	1894
145°	2975	2998	3017	3021	3008	1859
155°	3402	3411	3422	3438	3428	1566
165°	3701	3698	3698	3721	3704	1044
175°	3851	3842	3835	3858	3838	366
180°	3858	3858	3858	3858	3858	

TEST NUMBER: P912864

CATALOG NUMBER: DFN2DIP-TR4F0-070D110US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3208.4	3208.4	3208.4	3208.4	3208.4
2.5°	3222.9	3208.4	3176.4	3205.7	3199.8
5°	3208.4	3193.9	3156.1	3182.3	3173.6
7.5°	3182.3	3165.0	3124.4	3135.7	3121.3
10°	3147.5	3127.2	3069.2	3060.3	3043.0
12.5°	3104.0	3077.8	2999.3	2982.0	2949.9
15°	3051.6	3019.6	2921.0	2865.9	2836.9
17.5°	2990.6	2944.2	2822.2	2758.3	2711.8
20°	2921.0	2862.8	2717.7	2645.3	2581.2
22.5°	2845.6	2778.7	2610.1	2511.6	2468.2
25°	2770.1	2677.0	2485.4	2366.5	2322.8
27.5°	2680.1	2581.2	2369.3	2232.9	2166.0
30°	2584.3	2473.7	2241.4	2093.6	2015.1
32.5°	2491.3	2357.6	2119.7	1945.4	1872.7
35°	2386.8	2238.6	1983.3	1800.4	1736.3
37.5°	2285.2	2125.3	1855.5	1654.8	1582.5
40°	2177.6	2003.6	1721.7	1515.7	1440.1
42.5°	2067.4	1881.6	1588.3	1373.3	1301.0
45°	1951.3	1756.5	1451.9	1245.5	1175.9
47.5°	1840.9	1634.9	1321.3	1114.9	1051.1
50°	1719.0	1512.9	1193.4	992.9	932.2
52.5°	1599.7	1381.9	1071.4	879.8	824.7
55°	1483.6	1257.2	943.5	769.5	714.4
57.5°	1364.7	1132.4	830.5	667.8	621.4
60°	1242.7	1010.4	711.3	563.5	516.9
62.5°	1123.7	891.5	609.6	470.4	447.3
65°	1001.8	766.4	505.3	406.7	397.7
67.5°	885.6	650.3	406.7	357.0	348.4
70°	763.7	537.2	336.7	307.7	296.0
72.5°	647.5	432.5	281.6	258.5	252.6
75°	534.2	330.8	232.2	211.9	209.2
77.5°	421.1	235.0	183.0	171.2	165.5
80°	316.4	168.5	139.3	127.9	127.9
82.5°	220.6	113.3	95.8	89.9	89.9
85°	124.8	63.8	55.1	55.1	55.1
87.5°	46.5	23.1	23.1	20.3	20.3
90°	3.4	41.9	114.0	107.0	110.5
92.5°	72.1	97.7	101.1	104.7	104.7
95°	169.8	202.4	208.2	208.2	202.4
97.5°	282.7	312.8	325.7	325.7	325.7
100°	412.9	439.6	448.9	448.9	445.5
102.5°	550.2	569.9	582.8	586.2	582.8
105°	700.2	709.5	716.5	722.3	722.3
107.5°	849.1	863.0	863.0	865.4	849.1
110°	993.3	1012.0	1012.0	1012.0	1002.6

TEST NUMBER: P912864

CATALOG NUMBER: DFN2DIP-TR4F0-070D110US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1149.1	1168.9	1165.4	1156.1	1149.1
115°	1302.7	1321.3	1315.5	1312.1	1302.7
117.5°	1455.1	1480.6	1464.3	1455.1	1445.8
120°	1608.6	1634.2	1608.6	1608.6	1598.2
122.5°	1748.2	1780.7	1764.4	1755.1	1748.2
125°	1894.7	1923.8	1914.5	1904.0	1900.5
127.5°	2037.8	2073.8	2061.1	2047.1	2037.8
130°	2171.5	2213.5	2207.6	2200.6	2187.8
132.5°	2321.6	2354.2	2356.5	2340.2	2330.9
135°	2450.7	2486.7	2493.7	2490.3	2480.9
137.5°	2594.9	2624.0	2629.8	2627.4	2613.6
140°	2721.7	2750.8	2767.1	2767.1	2754.3
142.5°	2852.0	2881.1	2890.4	2893.8	2881.1
145°	2975.2	2998.5	3017.1	3020.6	3007.8
147.5°	3085.8	3114.8	3128.8	3134.6	3121.8
150°	3199.8	3219.5	3232.3	3242.8	3232.3
152.5°	3300.9	3320.7	3337.0	3349.8	3337.0
155°	3402.2	3411.4	3421.9	3438.2	3427.7
157.5°	3489.4	3496.3	3502.1	3525.4	3509.1
160°	3567.3	3574.3	3577.7	3597.6	3583.6
162.5°	3639.4	3639.4	3643.0	3665.0	3648.7
165°	3701.1	3697.5	3697.5	3720.8	3704.5
167.5°	3756.8	3746.4	3746.4	3769.7	3753.4
170°	3798.8	3789.5	3786.0	3809.2	3789.5
172.5°	3827.8	3818.5	3815.1	3838.4	3818.5
175°	3851.1	3841.8	3834.8	3858.1	3838.4
177.5°	3863.9	3854.6	3847.6	3867.4	3847.6
180°	3858.1	3858.1	3858.1	3858.1	3858.1



TEST NUMBER: P912864

CATALOG NUMBER: DFN2DIP-TR4F0-070D110US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.16	9.90	10.21	10.96	12.39	5.13	5.87	6.19	6.93	8.36
	3H	10.83	11.49	11.89	12.56	14.01	6.31	6.97	7.38	8.04	9.50
	4H	11.43	12.06	12.51	13.13	14.59	6.76	7.39	7.84	8.46	9.92
	6H	11.85	12.42	12.94	13.50	14.97	7.08	7.65	8.16	8.73	10.20
	8H	11.97	12.52	13.06	13.61	15.07	7.16	7.71	8.26	8.80	10.27
	12H	12.03	12.55	13.13	13.63	15.12	7.21	7.73	8.30	8.81	10.30
4H	2H	9.16	9.79	10.25	10.86	12.32	5.71	6.34	6.80	7.41	8.87
	3H	10.98	11.51	12.08	12.60	14.08	7.06	7.58	8.15	8.67	10.15
	4H	11.67	12.15	12.77	13.24	14.73	7.60	8.08	8.70	9.17	10.66
	6H	12.18	12.59	13.29	13.70	15.19	8.02	8.43	9.12	9.54	11.02
	8H	12.36	12.74	13.46	13.84	15.34	8.14	8.53	9.25	9.63	11.13
	12H	12.45	12.79	13.57	13.91	15.42	8.21	8.55	9.33	9.67	11.17
8H	4H	11.63	12.02	12.74	13.12	14.62	7.87	8.26	8.98	9.36	10.86
	6H	12.20	12.51	13.32	13.66	15.16	8.39	8.71	9.52	9.85	11.35
	8H	12.41	12.69	13.55	13.81	15.33	8.58	8.86	9.72	9.98	11.50
	12H	12.55	12.79	13.68	13.91	15.47	8.70	8.94	9.84	10.06	11.62
12H	4H	11.58	11.93	12.70	13.04	14.55	7.88	8.22	9.00	9.34	10.84
	6H	12.17	12.45	13.31	13.57	15.09	8.44	8.72	9.57	9.84	11.36
	8H	12.39	12.63	13.53	13.75	15.31	8.65	8.89	9.78	10.01	11.57