

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912978

Luminaire Tested: DFN2DIP-TR4F0-110D040US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912978
REPORT IS A COMBINATION OF REPORTS P900383 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-110D040US850-FLLFLL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16002.8 lumens
Efficiency: N/A
Efficacy: 111.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 143
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912978

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-FLLFLL

Luminous Intensity Polar Plot

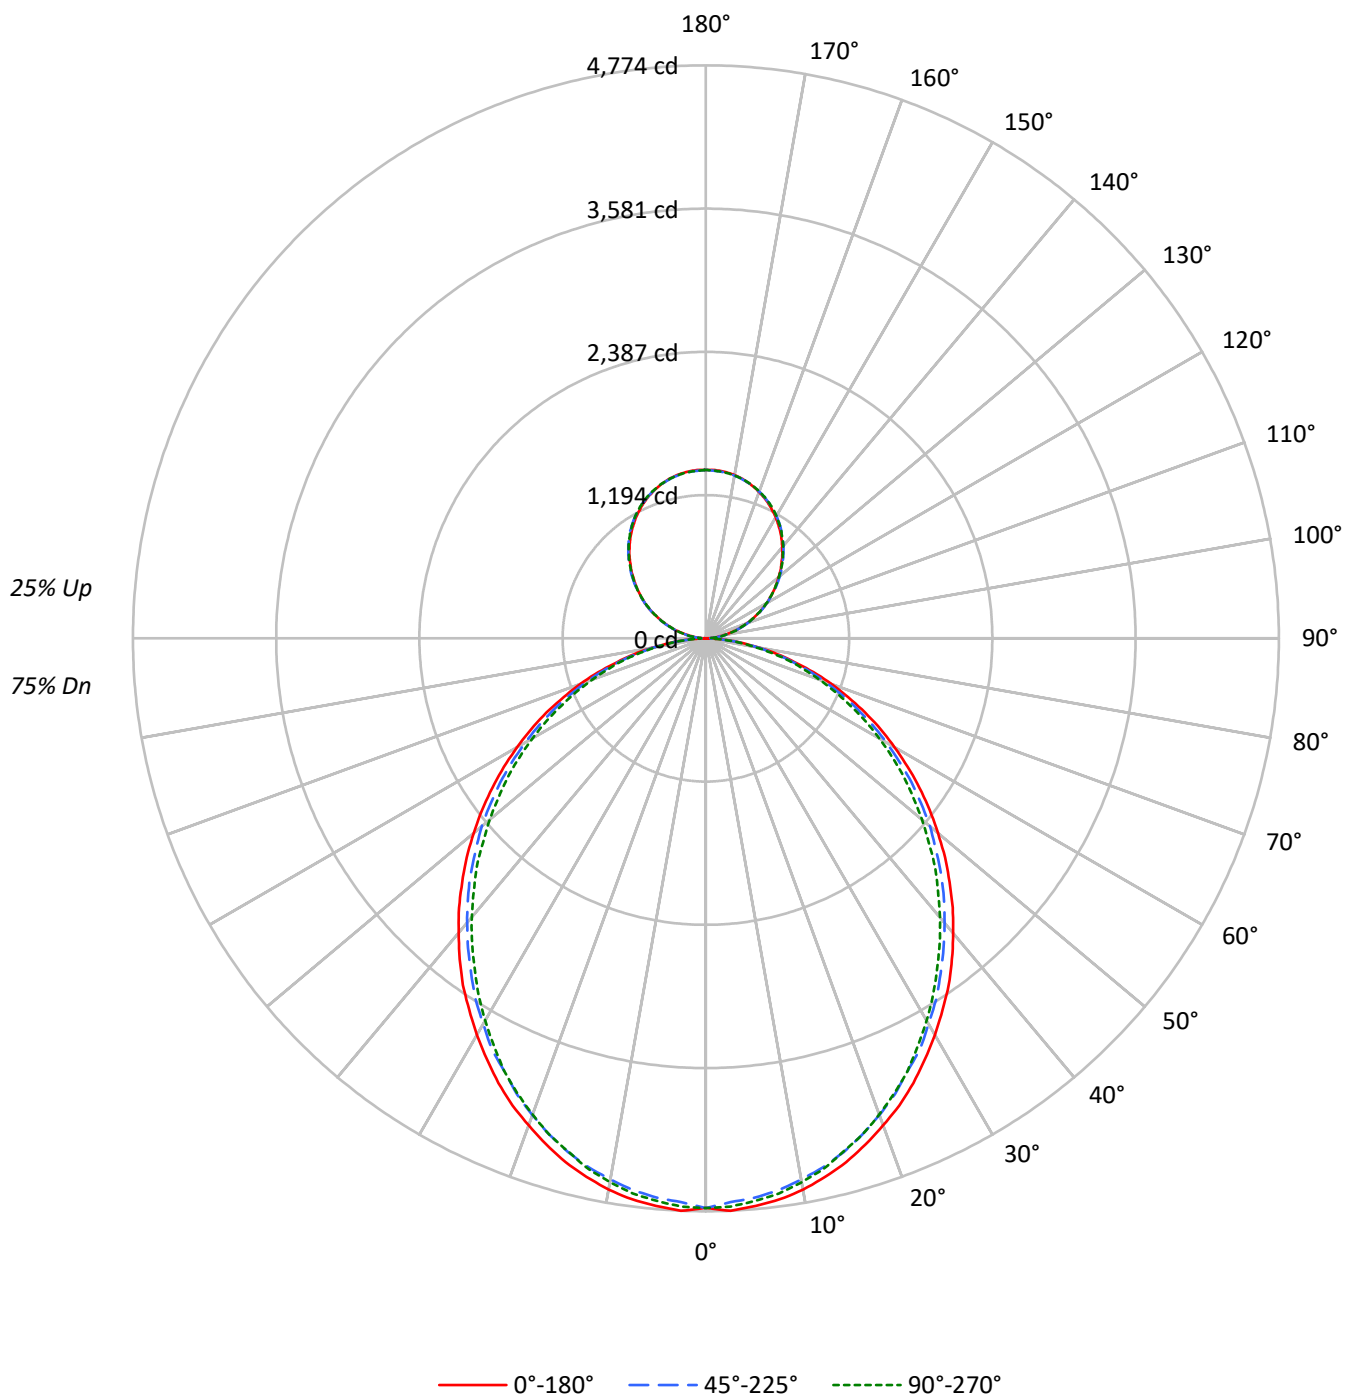

TEST NUMBER: P912978

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	80	80	80
1	104	99	95	91	98	94	91	88	86	83	80	78	76	74	70	69	67
2	94	87	80	75	89	83	77	72	75	71	67	68	65	62	62	59	57
3	86	76	68	62	82	73	66	60	66	61	56	60	56	52	55	51	48
4	79	68	59	53	75	65	57	51	59	53	48	54	49	45	49	45	42
5	73	60	52	46	69	58	50	44	53	46	42	48	43	39	44	40	36
6	67	54	46	40	63	52	44	39	48	41	36	44	38	34	40	36	32
7	62	49	41	35	59	47	40	34	44	37	32	40	34	30	37	32	29
8	58	45	37	31	55	43	36	30	40	33	29	37	31	27	34	29	26
9	54	41	33	28	51	40	32	27	37	30	26	34	28	25	31	27	23
10	50	38	30	25	48	36	29	25	34	28	23	31	26	22	29	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3771	3771	3771
5°	3777	3718	3743
10°	3746	3668	3692
15°	3691	3608	3613
20°	3617	3524	3532
25°	3543	3424	3438
30°	3450	3330	3319
35°	3362	3220	3193
40°	3254	3109	3073
45°	3146	2997	2950
50°	3028	2880	2807
55°	2905	2745	2677
60°	2765	2584	2527
65°	2613	2417	2350
70°	2419	2214	2160
75°	2150	1971	1984
80°	1827	1662	1648
85°	1322	1128	1092

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3146 cd/sqm

TEST NUMBER: P912978

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	446.8	2.8
10°-20°	1257.0	7.9
20°-30°	1847.3	11.5
30°-40°	2145.5	13.4
40°-50°	2142.9	13.4
50°-60°	1868.5	11.7
60°-70°	1381.3	8.6
70°-80°	781.5	4.9
80°-90°	210.2	1.3
90°-100°	86.8	0.5
100°-110°	275.8	1.7
110°-120°	472.0	2.9
120°-130°	620.8	3.9
130°-140°	696.8	4.4
140°-150°	683.3	4.3
150°-160°	573.2	3.6
160°-170°	380.1	2.4
170°-180°	132.9	0.8
0°-30°	3551.1	22.2
0°-40°	5696.6	35.6
0°-60°	9708.0	60.7
0°-90°	12081.0	75.5
90°-120°	834.7	5.2
90°-150°	2835.6	17.7
90°-180°	3922.0	24.5
0°-180°	16002.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4747	4747	4747	4747	4747	
5°	4747	4729	4678	4715	4706	451
15°	4519	4491	4432	4450	4428	1273
25°	4090	4053	3976	3984	3976	1882
35°	3528	3483	3410	3382	3359	2203
45°	2871	2839	2770	2721	2702	2216
55°	2173	2145	2091	2036	2013	1943
65°	1465	1438	1392	1351	1328	1449
75°	766	758	735	708	717	818
85°	187	182	178	164	160	209
90°	1	15	42	39	40	15
95°	62	74	76	76	74	69
105°	255	258	260	263	263	269
115°	474	480	478	477	474	469
125°	689	700	696	692	691	616
135°	891	904	907	906	902	689
145°	1082	1090	1097	1098	1094	676
155°	1237	1240	1244	1250	1246	569
165°	1346	1345	1345	1353	1347	380
175°	1400	1397	1394	1403	1396	133
180°	1403	1403	1403	1403	1403	

TEST NUMBER: P912978

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4746.7	4746.7	4746.7	4746.7	4746.7
2.5°	4774.2	4751.5	4701.2	4746.7	4738.0
5°	4746.7	4728.8	4678.4	4714.7	4706.0
7.5°	4714.7	4687.6	4637.3	4674.1	4664.9
10°	4664.9	4632.8	4578.2	4614.4	4600.9
12.5°	4596.1	4569.0	4514.3	4537.0	4527.8
15°	4518.6	4491.4	4431.9	4450.3	4427.6
17.5°	4422.7	4395.6	4336.1	4358.8	4336.1
20°	4317.7	4290.5	4226.6	4240.2	4222.3
22.5°	4213.1	4171.8	4112.3	4112.3	4103.1
25°	4089.5	4053.3	3975.8	3984.5	3975.8
27.5°	3952.5	3920.5	3861.4	3847.9	3825.2
30°	3816.0	3779.1	3710.8	3697.3	3678.9
32.5°	3669.7	3642.6	3569.4	3541.8	3523.4
35°	3528.3	3482.8	3409.6	3382.0	3359.3
37.5°	3368.5	3327.3	3254.2	3222.2	3199.5
40°	3204.3	3167.5	3094.4	3053.7	3035.3
42.5°	3044.5	3007.7	2935.1	2889.1	2862.0
45°	2871.2	2839.2	2770.4	2720.6	2702.2
47.5°	2702.2	2670.3	2597.1	2546.7	2519.5
50°	2524.0	2501.2	2437.2	2373.4	2350.6
52.5°	2350.6	2318.6	2259.6	2209.1	2177.2
55°	2172.9	2145.2	2090.6	2035.8	2013.1
57.5°	1994.6	1971.9	1912.4	1857.6	1839.2
60°	1816.4	1798.6	1734.6	1684.2	1670.7
62.5°	1643.1	1611.2	1565.6	1520.1	1501.7
65°	1465.3	1437.7	1392.2	1351.1	1328.4
67.5°	1282.8	1259.6	1218.9	1187.0	1168.6
70°	1113.8	1095.4	1054.2	1022.3	1004.3
72.5°	940.4	922.0	899.3	867.3	853.7
75°	766.5	757.9	734.6	707.5	716.7
77.5°	611.6	593.2	584.0	570.5	556.9
80°	456.7	451.8	442.6	429.1	419.9
82.5°	310.4	310.4	306.1	287.7	287.7
85°	187.0	182.5	178.2	164.1	159.8
87.5°	82.3	73.1	63.9	50.3	45.5
90°	1.2	15.2	41.5	38.9	40.1
92.5°	26.2	35.5	36.8	38.0	38.0
95°	61.8	73.6	75.7	75.7	73.6
97.5°	102.8	113.8	118.4	118.4	118.4
100°	150.2	159.9	163.2	163.2	162.0
102.5°	200.1	207.3	211.9	213.1	211.9
105°	254.6	258.0	260.5	262.6	262.6
107.5°	308.7	313.8	313.8	314.6	308.7
110°	361.2	368.0	368.0	368.0	364.6

TEST NUMBER: P912978

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	417.9	425.1	423.7	420.4	417.9
115°	473.7	480.5	478.3	477.1	473.7
117.5°	529.1	538.4	532.5	529.1	525.8
120°	585.0	594.2	585.0	585.0	581.1
122.5°	635.7	647.5	641.7	638.2	635.7
125°	689.0	699.6	696.2	692.3	691.1
127.5°	741.0	754.1	749.5	744.4	741.0
130°	789.6	804.9	802.8	800.3	795.6
132.5°	844.2	856.0	856.9	850.9	847.6
135°	891.2	904.3	906.8	905.5	902.2
137.5°	943.6	954.2	956.3	955.4	950.4
140°	989.7	1000.3	1006.2	1006.2	1001.5
142.5°	1037.1	1047.7	1051.0	1052.3	1047.7
145°	1081.9	1090.4	1097.1	1098.5	1093.8
147.5°	1122.1	1132.6	1137.7	1139.8	1135.2
150°	1163.6	1170.8	1175.4	1179.2	1175.4
152.5°	1200.4	1207.5	1213.5	1218.1	1213.5
155°	1237.1	1240.5	1244.3	1250.3	1246.4
157.5°	1268.9	1271.4	1273.5	1282.0	1276.0
160°	1297.2	1299.7	1301.0	1308.2	1303.1
162.5°	1323.4	1323.4	1324.7	1332.7	1326.8
165°	1345.9	1344.6	1344.6	1353.0	1347.1
167.5°	1366.2	1362.3	1362.3	1370.8	1364.8
170°	1381.4	1377.9	1376.7	1385.1	1377.9
172.5°	1391.9	1388.6	1387.2	1395.8	1388.6
175°	1400.4	1397.0	1394.5	1402.9	1395.8
177.5°	1405.1	1401.7	1399.1	1406.3	1399.1
180°	1402.9	1402.9	1402.9	1402.9	1402.9

TEST NUMBER: P912978

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.96	15.11	14.66	15.83	16.68	13.53	14.68	14.23	15.40	16.25
	3H	15.64	16.67	16.36	17.41	18.29	15.17	16.20	15.88	16.93	17.82
	4H	16.24	17.22	16.98	17.96	18.86	15.77	16.74	16.50	17.49	18.38
	6H	16.66	17.56	17.40	18.31	19.22	16.18	17.08	16.93	17.83	18.74
	8H	16.77	17.63	17.53	18.40	19.31	16.29	17.15	17.05	17.92	18.84
	12H	16.83	17.64	17.59	18.41	19.35	16.35	17.16	17.11	17.93	18.87
4H	2H	14.46	15.43	15.19	16.17	17.07	14.11	15.09	14.85	15.83	16.73
	3H	16.35	17.16	17.10	17.94	18.86	15.95	16.77	16.71	17.55	18.46
	4H	17.07	17.81	17.84	18.59	19.54	16.67	17.41	17.43	18.19	19.13
	6H	17.60	18.25	18.39	19.05	20.00	17.19	17.84	17.98	18.64	19.59
	8H	17.76	18.36	18.55	19.16	20.12	17.35	17.95	18.14	18.75	19.71
	12H	17.85	18.39	18.66	19.21	20.18	17.43	17.97	18.23	18.79	19.76
8H	4H	17.29	17.89	18.08	18.69	19.66	16.93	17.53	17.72	18.33	19.30
	6H	17.94	18.43	18.75	19.27	20.24	17.57	18.07	18.39	18.91	19.88
	8H	18.16	18.60	18.99	19.44	20.42	17.79	18.23	18.62	19.07	20.05
	12H	18.30	18.69	19.14	19.52	20.56	17.92	18.31	18.75	19.14	20.18
12H	4H	17.29	17.83	18.10	18.65	19.62	16.94	17.48	17.75	18.30	19.27
	6H	17.97	18.41	18.80	19.25	20.23	17.62	18.06	18.45	18.90	19.88
	8H	18.22	18.61	19.06	19.44	20.48	17.87	18.26	18.70	19.09	20.13