

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912980

Luminaire Tested: DFN2DIP-TR4F0-110D040US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912980
REPORT IS A COMBINATION OF REPORTS P900384 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-110D040US850-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14295.0 lumens
Efficiency: N/A
Efficacy: 100.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 143
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912980

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-RLLFLL

Luminous Intensity Polar Plot

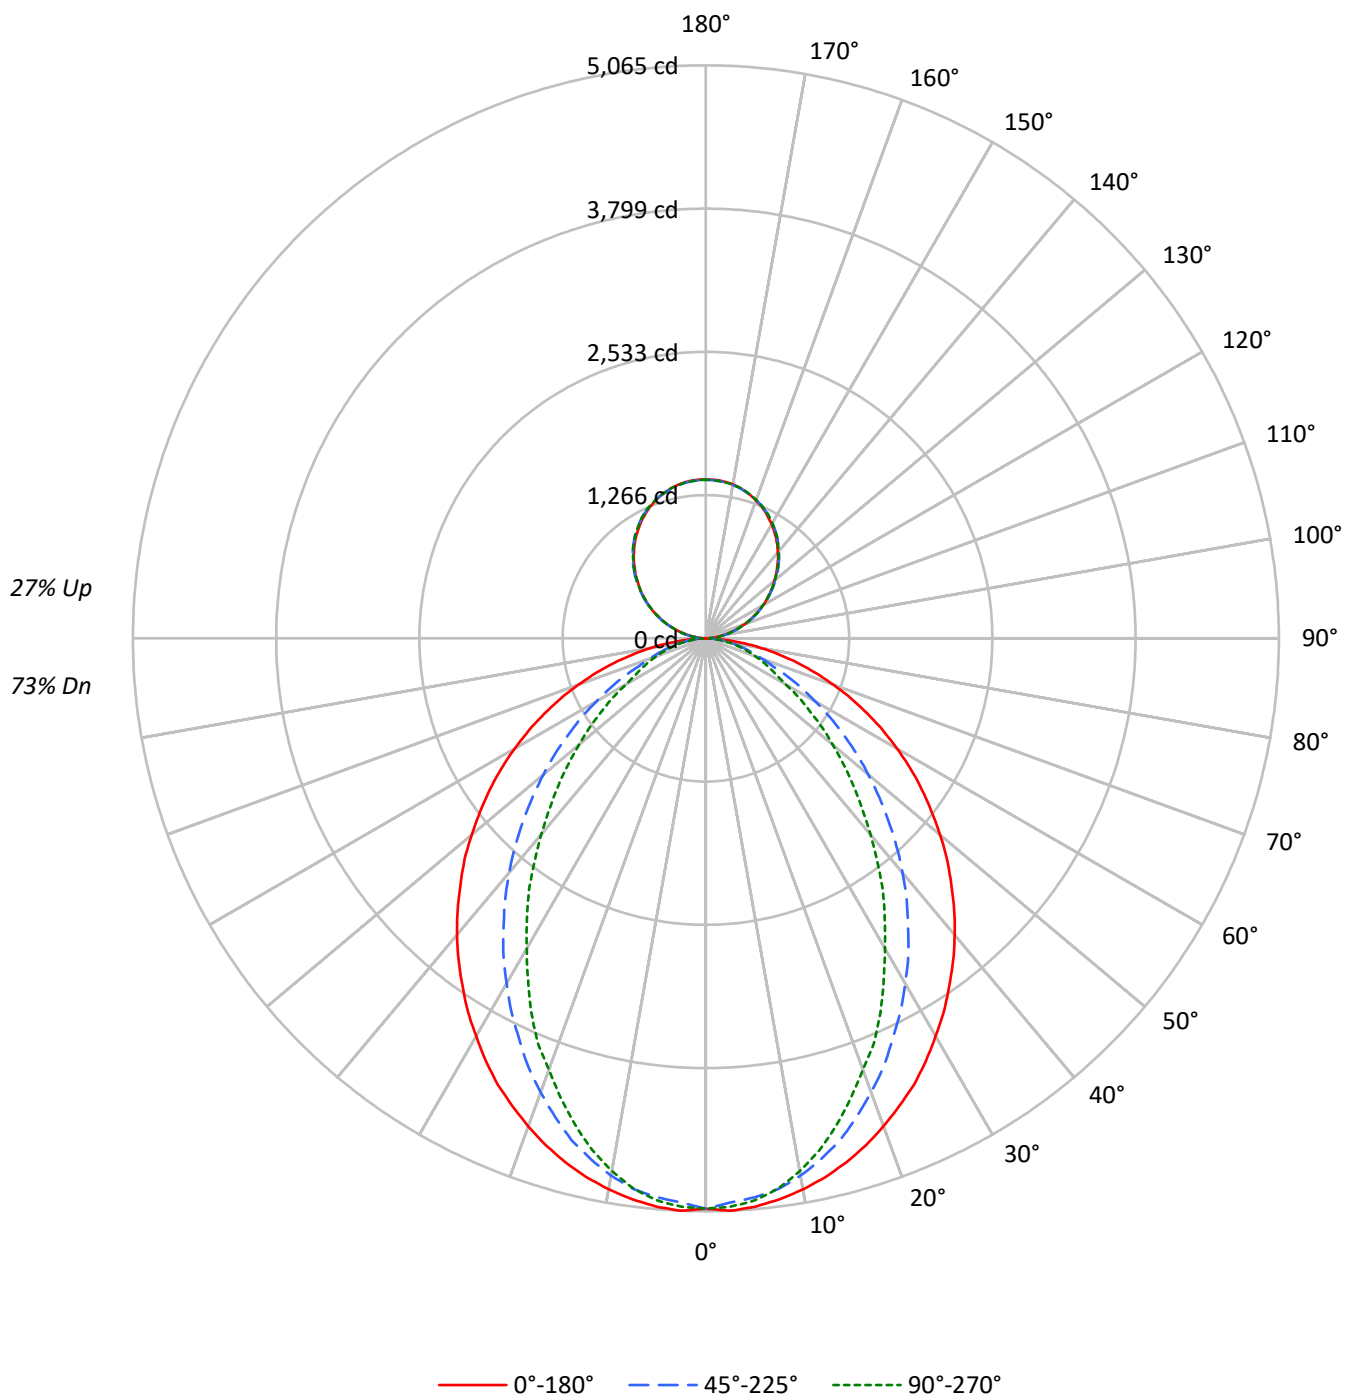

TEST NUMBER: P912980

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	113	113	113	113	107	107	107	107	96	96	96	86	86	86	77	77	77
1	104	99	96	92	98	94	91	88	85	83	80	77	75	73	69	68	66
2	95	88	82	77	90	83	78	74	76	71	68	68	65	62	62	59	57
3	87	78	70	65	82	74	68	62	67	62	58	61	57	53	55	52	49
4	80	69	61	55	76	66	59	54	60	55	50	55	50	47	50	46	43
5	74	62	54	48	70	60	52	47	54	48	44	50	45	41	45	41	38
6	68	56	48	42	65	54	47	41	49	43	39	45	40	36	41	37	34
7	64	51	43	38	60	49	42	37	45	39	34	41	36	32	38	34	30
8	59	47	39	34	56	45	38	33	41	35	31	38	33	29	35	31	28
9	55	43	35	30	53	41	34	30	38	32	28	35	30	27	33	28	25
10	52	40	32	28	49	38	31	27	35	30	26	33	28	24	30	26	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4005	4005	4005
5°	4012	3942	3967
10°	3972	3864	3838
15°	3917	3737	3638
20°	3845	3561	3393
25°	3771	3363	3157
30°	3672	3161	2857
35°	3574	2943	2593
40°	3475	2718	2291
45°	3360	2468	2017
50°	3241	2216	1750
55°	3116	1947	1493
60°	2973	1665	1229
65°	2807	1378	1105
70°	2606	1111	1000
75°	2354	980	910
80°	1989	822	789
85°	1387	548	592

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3360 cd/sqm

TEST NUMBER: P912980

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	472.5	3.3
10°-20°	1297.2	9.1
20°-30°	1821.2	12.7
30°-40°	1985.2	13.9
40°-50°	1824.6	12.8
50°-60°	1433.0	10.0
60°-70°	932.7	6.5
70°-80°	480.1	3.4
80°-90°	126.6	0.9
90°-100°	86.8	0.6
100°-110°	275.8	1.9
110°-120°	472.0	3.3
120°-130°	620.8	4.3
130°-140°	696.8	4.9
140°-150°	683.3	4.8
150°-160°	573.2	4.0
160°-170°	380.1	2.7
170°-180°	132.9	0.9
0°-30°	3590.9	25.1
0°-40°	5576.1	39.0
0°-60°	8833.7	61.8
0°-90°	10373.1	72.6
90°-120°	834.7	5.8
90°-150°	2835.6	19.8
90°-180°	3922.0	27.4
0°-180°	14295.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5042	5042	5042	5042	5042	
5°	5042	5019	4960	5001	4987	478
15°	4795	4745	4590	4504	4458	1351
25°	4353	4207	3906	3719	3650	2002
35°	3751	3518	3117	2829	2728	2348
45°	3066	2760	2282	1957	1848	2368
55°	2331	1976	1483	1209	1123	2083
65°	1574	1204	794	639	625	1561
75°	839	520	365	333	329	888
85°	196	100	87	87	87	225
90°	1	15	42	39	40	14
95°	62	74	76	76	74	69
105°	255	258	260	263	263	269
115°	474	480	478	477	474	469
125°	689	700	696	692	691	616
135°	891	904	907	906	902	689
145°	1082	1090	1097	1098	1094	676
155°	1237	1240	1244	1250	1246	569
165°	1346	1345	1345	1353	1347	380
175°	1400	1397	1394	1403	1396	133
180°	1403	1403	1403	1403	1403	

TEST NUMBER: P912980

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5041.8	5041.8	5041.8	5041.8	5041.8
2.5°	5064.6	5041.8	4991.5	5037.5	5028.3
5°	5041.8	5019.1	4959.6	5000.7	4987.2
7.5°	5000.7	4973.5	4909.7	4927.6	4904.8
10°	4946.0	4914.0	4823.0	4809.0	4781.9
12.5°	4877.7	4836.6	4713.1	4686.0	4635.6
15°	4795.4	4745.1	4590.2	4503.5	4458.0
17.5°	4699.6	4626.5	4434.8	4334.5	4261.4
20°	4590.2	4498.7	4270.6	4156.9	4056.2
22.5°	4471.6	4366.5	4101.7	3946.8	3878.5
25°	4352.9	4206.8	3905.7	3718.8	3650.1
27.5°	4211.6	4056.2	3723.1	3508.7	3403.6
30°	4061.0	3887.3	3522.3	3289.8	3166.4
32.5°	3914.9	3704.7	3331.0	3057.1	2942.8
35°	3750.7	3517.9	3116.6	2829.1	2728.4
37.5°	3591.1	3339.8	2915.7	2600.5	2486.8
40°	3422.0	3148.6	2705.6	2381.7	2263.1
42.5°	3248.7	2956.8	2496.0	2158.1	2044.3
45°	3066.3	2760.3	2281.5	1957.2	1847.8
47.5°	2892.9	2569.1	2076.3	1751.9	1651.7
50°	2701.2	2377.4	1875.4	1560.3	1464.9
52.5°	2513.9	2171.6	1683.7	1382.6	1295.9
55°	2331.3	1975.6	1482.7	1209.3	1122.6
57.5°	2144.6	1779.5	1305.1	1049.6	976.4
60°	1952.8	1587.9	1117.8	885.4	812.3
62.5°	1766.0	1401.0	958.1	739.3	702.9
65°	1574.2	1204.4	793.9	639.0	624.9
67.5°	1391.8	1021.9	639.0	561.0	547.5
70°	1200.0	844.3	529.1	483.6	465.2
72.5°	1017.5	679.7	442.5	406.1	396.9
75°	839.4	519.9	365.0	333.0	328.7
77.5°	661.7	369.4	287.6	269.2	259.9
80°	497.2	264.8	218.8	201.0	201.0
82.5°	346.6	178.1	150.6	141.4	141.4
85°	196.1	100.3	86.6	86.6	86.6
87.5°	73.1	36.3	36.3	31.9	31.9
90°	1.2	15.2	41.5	38.9	40.1
92.5°	26.2	35.5	36.8	38.0	38.0
95°	61.8	73.6	75.7	75.7	73.6
97.5°	102.8	113.8	118.4	118.4	118.4
100°	150.2	159.9	163.2	163.2	162.0
102.5°	200.1	207.3	211.9	213.1	211.9
105°	254.6	258.0	260.5	262.6	262.6
107.5°	308.7	313.8	313.8	314.6	308.7
110°	361.2	368.0	368.0	368.0	364.6



TEST NUMBER: P912980

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	417.9	425.1	423.7	420.4	417.9
115°	473.7	480.5	478.3	477.1	473.7
117.5°	529.1	538.4	532.5	529.1	525.8
120°	585.0	594.2	585.0	585.0	581.1
122.5°	635.7	647.5	641.7	638.2	635.7
125°	689.0	699.6	696.2	692.3	691.1
127.5°	741.0	754.1	749.5	744.4	741.0
130°	789.6	804.9	802.8	800.3	795.6
132.5°	844.2	856.0	856.9	850.9	847.6
135°	891.2	904.3	906.8	905.5	902.2
137.5°	943.6	954.2	956.3	955.4	950.4
140°	989.7	1000.3	1006.2	1006.2	1001.5
142.5°	1037.1	1047.7	1051.0	1052.3	1047.7
145°	1081.9	1090.4	1097.1	1098.5	1093.8
147.5°	1122.1	1132.6	1137.7	1139.8	1135.2
150°	1163.6	1170.8	1175.4	1179.2	1175.4
152.5°	1200.4	1207.5	1213.5	1218.1	1213.5
155°	1237.1	1240.5	1244.3	1250.3	1246.4
157.5°	1268.9	1271.4	1273.5	1282.0	1276.0
160°	1297.2	1299.7	1301.0	1308.2	1303.1
162.5°	1323.4	1323.4	1324.7	1332.7	1326.8
165°	1345.9	1344.6	1344.6	1353.0	1347.1
167.5°	1366.2	1362.3	1362.3	1370.8	1364.8
170°	1381.4	1377.9	1376.7	1385.1	1377.9
172.5°	1391.9	1388.6	1387.2	1395.8	1388.6
175°	1400.4	1397.0	1394.5	1402.9	1395.8
177.5°	1405.1	1401.7	1399.1	1406.3	1399.1
180°	1402.9	1402.9	1402.9	1402.9	1402.9

TEST NUMBER: P912980

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.85	14.91	14.60	15.67	16.58	9.83	10.88	10.57	11.64	12.55
	3H	15.55	16.49	16.30	17.26	18.20	11.03	11.98	11.79	12.75	13.69
	4H	16.17	17.06	16.94	17.83	18.79	11.49	12.38	12.27	13.16	14.12
	6H	16.60	17.42	17.39	18.21	19.17	11.83	12.65	12.62	13.44	14.40
	8H	16.73	17.51	17.53	18.32	19.29	11.93	12.71	12.72	13.51	14.48
	12H	16.80	17.54	17.60	18.34	19.34	11.98	12.72	12.78	13.52	14.51
4H	2H	13.90	14.79	14.68	15.57	16.52	10.45	11.34	11.23	12.12	13.07
	3H	15.75	16.49	16.54	17.30	18.27	11.82	12.56	12.61	13.37	14.34
	4H	16.45	17.12	17.25	17.93	18.93	12.38	13.05	13.18	13.86	14.86
	6H	16.98	17.55	17.80	18.39	19.40	12.81	13.39	13.63	14.23	15.23
	8H	17.16	17.70	17.98	18.53	19.55	12.94	13.49	13.77	14.32	15.33
	12H	17.26	17.75	18.11	18.60	19.62	13.02	13.51	13.87	14.36	15.38
8H	4H	16.43	16.97	17.26	17.81	18.82	12.67	13.22	13.50	14.05	15.07
	6H	17.01	17.45	17.86	18.33	19.35	13.20	13.65	14.06	14.52	15.54
	8H	17.22	17.62	18.09	18.49	19.53	13.40	13.79	14.26	14.66	15.70
	12H	17.37	17.72	18.24	18.58	19.67	13.52	13.87	14.39	14.74	15.83
12H	4H	16.40	16.88	17.24	17.74	18.76	12.69	13.18	13.53	14.03	15.05
	6H	16.98	17.38	17.85	18.25	19.29	13.25	13.65	14.12	14.52	15.56
	8H	17.21	17.56	18.08	18.43	19.52	13.47	13.82	14.34	14.69	15.78