

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912984

Luminaire Tested: DFN2DIP-TR4F0-110D050US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912984
REPORT IS A COMBINATION OF REPORTS P900402 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-110D050US850-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 15276.5 lumens
Efficiency: N/A
Efficacy: 101.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 150.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912984
CATALOG NUMBER: DFN2DIP-TR4F0-110D050US850-RLLFLL

Luminous Intensity Polar Plot

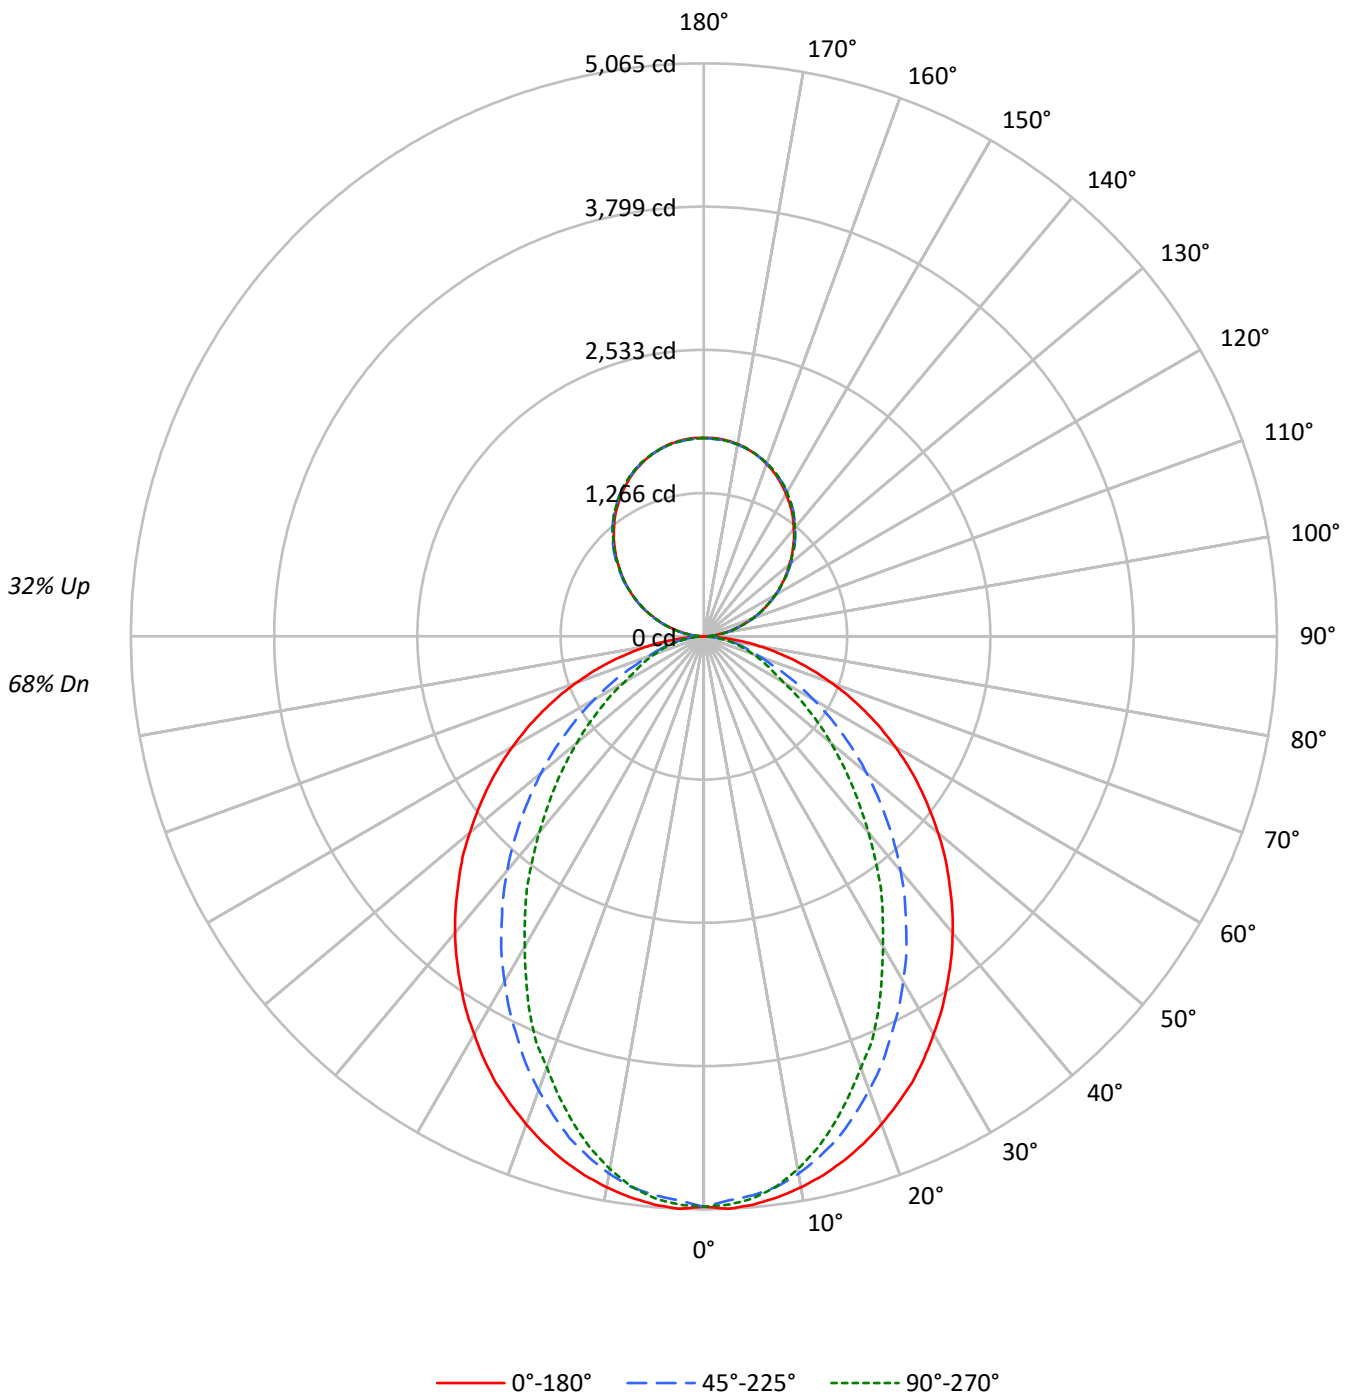



TEST NUMBER: P912984

CATALOG NUMBER: DFN2DIP-TR4F0-110D050US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									20
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	73	73	73	68																												
1	102	98	94	91	97	93	90	87	83	80	78	74	72	70	65	64	63	59																												
2	94	87	81	76	88	82	77	72	73	69	66	66	62	60	58	56	54	50																												
3	86	77	70	64	81	73	66	61	65	60	56	59	55	51	52	49	47	43																												
4	79	68	61	55	74	65	58	53	59	53	49	53	48	45	47	44	41	38																												
5	73	61	53	47	69	58	51	46	53	47	42	48	43	39	43	39	36	33																												
6	68	56	47	42	64	53	46	40	48	42	37	43	38	35	39	35	32	29																												
7	63	50	42	37	59	48	41	36	44	38	33	40	35	31	36	32	29	26																												
8	58	46	38	33	55	44	37	32	40	34	30	37	32	28	33	29	26	24																												
9	55	42	35	30	52	40	34	29	37	31	27	34	29	25	31	27	24	22																												
10	51	39	32	27	48	37	31	26	34	29	25	31	27	23	29	25	22	20																												

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4005	4005	4005
5°	4012	3942	3967
10°	3972	3864	3838
15°	3917	3737	3638
20°	3845	3561	3393
25°	3771	3363	3157
30°	3672	3161	2857
35°	3574	2943	2593
40°	3475	2718	2291
45°	3360	2468	2017
50°	3241	2216	1750
55°	3116	1947	1493
60°	2973	1665	1229
65°	2807	1378	1105
70°	2606	1111	1000
75°	2354	980	910
80°	1989	822	789
85°	1387	548	592

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3360 cd/sqm



TEST NUMBER: P912984

CATALOG NUMBER: DFN2DIP-TR4F0-110D050US850-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	472.5	3.1
10°-20°	1297.2	8.5
20°-30°	1821.2	11.9
30°-40°	1985.2	13.0
40°-50°	1824.6	11.9
50°-60°	1433.0	9.4
60°-70°	932.7	6.1
70°-80°	480.1	3.1
80°-90°	127.6	0.8
90°-100°	108.5	0.7
100°-110°	344.8	2.3
110°-120°	590.1	3.9
120°-130°	776.0	5.1
130°-140°	871.0	5.7
140°-150°	854.2	5.6
150°-160°	716.5	4.7
160°-170°	475.2	3.1
170°-180°	166.1	1.1
0°-30°	3590.9	23.5
0°-40°	5576.1	36.5
0°-60°	8833.7	57.8
0°-90°	10374.1	67.9
90°-120°	1043.4	6.8
90°-150°	3544.6	23.2
90°-180°	4902.0	32.1
0°-180°	15276.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5042	5042	5042	5042	5042	
5°	5042	5019	4960	5001	4987	478
15°	4795	4745	4590	4504	4458	1351
25°	4353	4207	3906	3719	3650	2002
35°	3751	3518	3117	2829	2728	2348
45°	3066	2760	2282	1957	1848	2368
55°	2331	1976	1483	1209	1123	2083
65°	1574	1204	794	639	625	1561
75°	839	520	365	333	329	888
85°	196	100	87	87	87	225
90°	2	19	52	49	50	15
95°	77	92	95	95	92	86
105°	318	322	326	328	328	336
115°	592	601	598	596	592	586
125°	861	874	870	866	864	770
135°	1114	1130	1134	1132	1128	861
145°	1352	1363	1371	1373	1367	845
155°	1546	1551	1555	1563	1558	712
165°	1682	1681	1681	1691	1684	475
175°	1751	1746	1743	1754	1745	166
180°	1754	1754	1754	1754	1754	



TEST NUMBER: P912984

CATALOG NUMBER: DFN2DIP-TR4F0-110D050US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5041.8	5041.8	5041.8	5041.8	5041.8
2.5°	5064.6	5041.8	4991.5	5037.5	5028.3
5°	5041.8	5019.1	4959.6	5000.7	4987.2
7.5°	5000.7	4973.5	4909.7	4927.6	4904.8
10°	4946.0	4914.0	4823.0	4809.0	4781.9
12.5°	4877.7	4836.6	4713.1	4686.0	4635.6
15°	4795.4	4745.1	4590.2	4503.5	4458.0
17.5°	4699.6	4626.5	4434.8	4334.5	4261.4
20°	4590.2	4498.7	4270.6	4156.9	4056.2
22.5°	4471.6	4366.5	4101.7	3946.8	3878.5
25°	4352.9	4206.8	3905.7	3718.8	3650.1
27.5°	4211.6	4056.2	3723.1	3508.7	3403.6
30°	4061.0	3887.3	3522.3	3289.8	3166.4
32.5°	3914.9	3704.7	3331.0	3057.1	2942.8
35°	3750.7	3517.9	3116.6	2829.1	2728.4
37.5°	3591.1	3339.8	2915.7	2600.5	2486.8
40°	3422.0	3148.6	2705.6	2381.7	2263.1
42.5°	3248.7	2956.8	2496.0	2158.1	2044.3
45°	3066.3	2760.3	2281.5	1957.2	1847.8
47.5°	2892.9	2569.1	2076.3	1751.9	1651.7
50°	2701.2	2377.4	1875.4	1560.3	1464.9
52.5°	2513.9	2171.6	1683.7	1382.6	1295.9
55°	2331.3	1975.6	1482.7	1209.3	1122.6
57.5°	2144.6	1779.5	1305.1	1049.6	976.4
60°	1952.8	1587.9	1117.8	885.4	812.3
62.5°	1766.0	1401.0	958.1	739.3	702.9
65°	1574.2	1204.4	793.9	639.0	624.9
67.5°	1391.8	1021.9	639.0	561.0	547.5
70°	1200.0	844.3	529.1	483.6	465.2
72.5°	1017.5	679.7	442.5	406.1	396.9
75°	839.4	519.9	365.0	333.0	328.7
77.5°	661.7	369.4	287.6	269.2	259.9
80°	497.2	264.8	218.8	201.0	201.0
82.5°	346.6	178.1	150.6	141.4	141.4
85°	196.1	100.3	86.6	86.6	86.6
87.5°	73.1	36.3	36.3	31.9	31.9
90°	1.6	19.1	51.8	48.7	50.2
92.5°	32.8	44.4	46.0	47.6	47.6
95°	77.2	92.0	94.6	94.6	92.0
97.5°	128.4	142.2	148.1	148.1	148.1
100°	187.6	199.8	204.1	204.1	202.5
102.5°	250.1	259.1	264.8	266.5	264.8
105°	318.3	322.5	325.7	328.3	328.3
107.5°	385.9	392.3	392.3	393.4	385.9
110°	451.5	460.0	460.0	460.0	455.7



TEST NUMBER: P912984

CATALOG NUMBER: DFN2DIP-TR4F0-110D050US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	522.3	531.3	529.8	525.6	522.3
115°	592.1	600.6	598.0	596.4	592.1
117.5°	661.4	673.1	665.6	661.4	657.2
120°	731.2	742.8	731.2	731.2	726.4
122.5°	794.6	809.5	802.0	797.8	794.6
125°	861.2	874.4	870.2	865.5	863.9
127.5°	926.2	942.6	936.9	930.5	926.2
130°	987.1	1006.1	1003.4	1000.3	994.4
132.5°	1055.3	1070.1	1071.2	1063.8	1059.5
135°	1114.0	1130.3	1133.5	1132.0	1127.7
137.5°	1179.5	1192.7	1195.4	1194.3	1188.0
140°	1237.1	1250.4	1257.7	1257.7	1252.0
142.5°	1296.3	1309.6	1313.8	1315.4	1309.6
145°	1352.4	1363.0	1371.4	1373.1	1367.2
147.5°	1402.7	1415.9	1422.2	1424.8	1419.0
150°	1454.5	1463.4	1469.2	1474.0	1469.2
152.5°	1500.5	1509.5	1516.8	1522.7	1516.8
155°	1546.4	1550.6	1555.4	1562.8	1558.0
157.5°	1586.1	1589.2	1591.9	1602.5	1595.1
160°	1621.5	1624.7	1626.2	1635.2	1628.9
162.5°	1654.3	1654.3	1655.8	1665.9	1658.5
165°	1682.4	1680.7	1680.7	1691.3	1683.9
167.5°	1707.6	1702.9	1702.9	1713.5	1706.1
170°	1726.7	1722.5	1720.9	1731.5	1722.5
172.5°	1739.9	1735.7	1734.1	1744.7	1735.7
175°	1750.6	1746.2	1743.1	1753.7	1744.7
177.5°	1756.3	1752.1	1748.9	1757.9	1748.9
180°	1753.7	1753.7	1753.7	1753.7	1753.7



TEST NUMBER: P912984
 CATALOG NUMBER: DFN2DIP-TR4F0-110D050US850-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.49	14.49	14.29	15.30	16.30	9.46	10.47	10.26	11.28	12.27
	3H	15.18	16.08	15.99	16.90	17.92	10.67	11.56	11.47	12.38	13.41
	4H	15.80	16.64	16.62	17.47	18.50	11.13	11.97	11.95	12.80	13.83
	6H	16.23	17.01	17.06	17.84	18.89	11.46	12.23	12.29	13.07	14.12
	8H	16.36	17.10	17.20	17.95	19.00	11.55	12.29	12.40	13.15	14.19
	12H	16.43	17.13	17.28	17.98	19.05	11.60	12.31	12.45	13.16	14.23
4H	2H	13.53	14.37	14.36	15.20	16.24	10.08	10.93	10.91	11.75	12.79
	3H	15.37	16.08	16.21	16.94	17.99	11.45	12.15	12.29	13.01	14.06
	4H	16.07	16.71	16.93	17.57	18.65	12.00	12.64	12.86	13.50	14.58
	6H	16.60	17.15	17.47	18.03	19.11	12.43	12.98	13.30	13.87	14.95
	8H	16.78	17.29	17.65	18.17	19.26	12.57	13.08	13.44	13.96	15.05
	12H	16.88	17.34	17.77	18.24	19.34	12.64	13.10	13.53	14.00	15.10
8H	4H	16.05	16.57	16.93	17.45	18.54	12.30	12.81	13.17	13.69	14.78
	6H	16.63	17.05	17.53	17.97	19.06	12.82	13.24	13.72	14.17	15.26
	8H	16.84	17.22	17.75	18.13	19.24	13.01	13.39	13.92	14.30	15.41
	12H	16.99	17.32	17.90	18.23	19.39	13.14	13.47	14.05	14.38	15.54
12H	4H	16.01	16.47	16.90	17.37	18.47	12.31	12.77	13.20	13.67	14.77
	6H	16.60	16.98	17.51	17.89	19.00	12.87	13.25	13.78	14.16	15.27
	8H	16.83	17.16	17.74	18.07	19.23	13.09	13.42	14.00	14.33	15.49