

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913013

Luminaire Tested: DFN2DIP-TR4F0-110D120US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913013
REPORT IS A COMBINATION OF REPORTS P902048 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-110D120US850-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 23544.1 lumens
Efficiency: N/A
Efficacy: 115.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 204
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913013

CATALOG NUMBER: DFN2DIP-TR4F0-110D120US850-RLLONL

Luminous Intensity Polar Plot

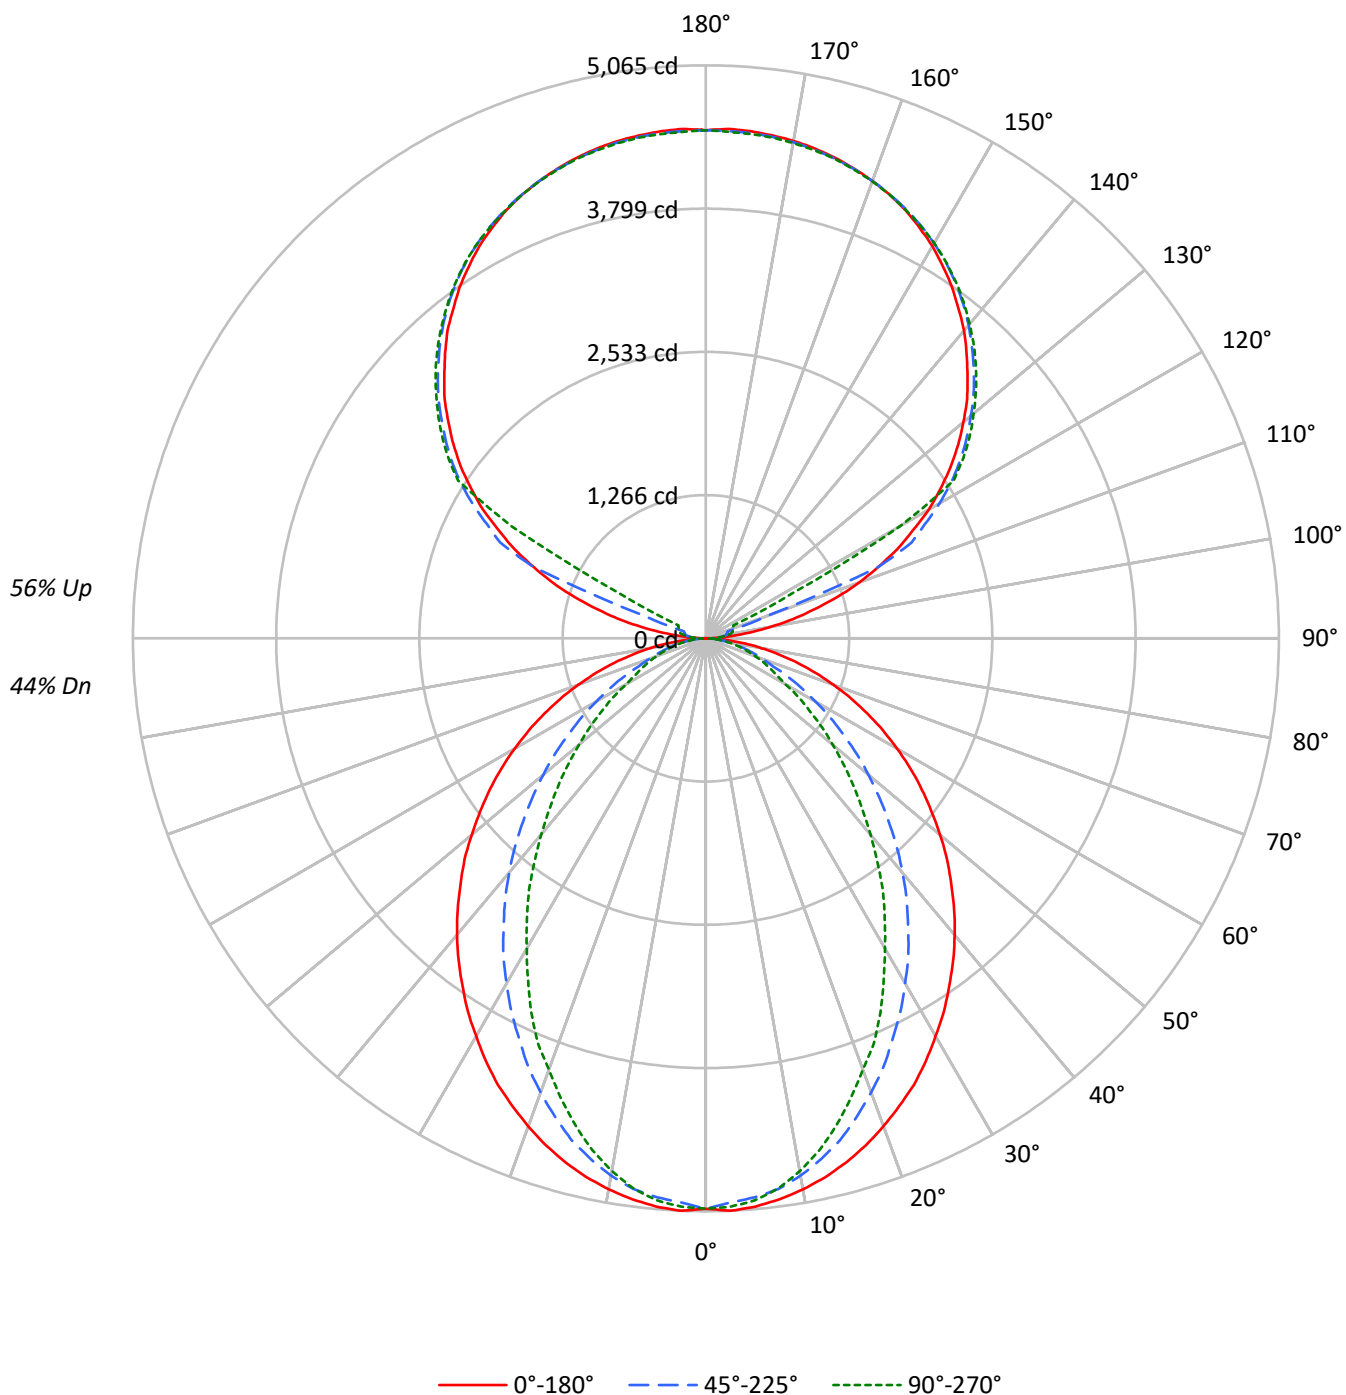

TEST NUMBER: P913013

CATALOG NUMBER: DFN2DIP-TR4F0-110D120US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	45	44	44
2	89	81	76	71	81	75	70	66	62	59	56	51	49	46	40	39	37
3	81	72	65	59	74	66	60	55	55	51	47	46	42	40	36	34	32
4	74	64	56	51	68	59	52	47	50	45	41	41	37	34	33	30	28
5	68	57	49	44	62	53	46	41	45	39	35	37	33	30	30	27	25
6	63	51	44	38	58	48	41	36	40	35	31	33	29	26	27	24	22
7	58	46	39	33	53	43	36	31	37	31	27	31	27	24	25	22	20
8	54	42	35	30	50	39	33	28	33	28	24	28	24	21	23	20	18
9	51	39	31	26	46	36	29	25	31	26	22	26	22	19	21	18	16
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4005	4005	4005
5°	4012	3942	3967
10°	3972	3864	3838
15°	3917	3737	3638
20°	3845	3561	3393
25°	3771	3363	3157
30°	3672	3161	2857
35°	3574	2943	2593
40°	3475	2718	2291
45°	3360	2468	2017
50°	3241	2216	1750
55°	3116	1947	1493
60°	2973	1665	1229
65°	2807	1378	1105
70°	2606	1111	1000
75°	2354	980	910
80°	1989	822	789
85°	1387	548	592

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3360 cd/sqm

TEST NUMBER: P913013

CATALOG NUMBER: DFN2DIP-TR4F0-110D120US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	472.5	2.0
10°-20°	1297.2	5.5
20°-30°	1821.2	7.7
30°-40°	1985.2	8.4
40°-50°	1824.6	7.7
50°-60°	1433.0	6.1
60°-70°	932.7	4.0
70°-80°	480.1	2.0
80°-90°	130.5	0.6
90°-100°	148.1	0.6
100°-110°	552.1	2.3
110°-120°	1464.2	6.2
120°-130°	2428.5	10.3
130°-140°	2579.6	11.0
140°-150°	2397.5	10.2
150°-160°	1927.5	8.2
160°-170°	1242.0	5.3
170°-180°	427.5	1.8
0°-30°	3590.9	15.3
0°-40°	5576.1	23.7
0°-60°	8833.7	37.5
0°-90°	10377.1	44.1
90°-120°	2164.4	9.2
90°-150°	9570.0	40.6
90°-180°	13167.0	55.9
0°-180°	23544.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5042	5042	5042	5042	5042	
5°	5042	5019	4960	5001	4987	478
15°	4795	4745	4590	4504	4458	1351
25°	4353	4207	3906	3719	3650	2002
35°	3751	3518	3117	2829	2728	2348
45°	3066	2760	2282	1957	1848	2368
55°	2331	1976	1483	1209	1123	2083
65°	1574	1204	794	639	625	1561
75°	839	520	365	333	329	888
85°	196	100	87	87	87	225
90°	3	39	65	81	88	22
95°	211	104	126	143	140	250
105°	988	1086	198	234	247	1056
115°	1869	1924	2005	500	267	1840
125°	2642	2684	2746	2769	2779	2356
135°	3269	3322	3350	3383	3377	2526
145°	3793	3789	3844	3867	3851	2372
155°	4176	4147	4186	4205	4180	1924
165°	4400	4381	4390	4413	4390	1243
175°	4501	4478	4485	4508	4475	428
180°	4491	4491	4491	4491	4491	

TEST NUMBER: P913013

CATALOG NUMBER: DFN2DIP-TR4F0-110D120US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5041.8	5041.8	5041.8	5041.8	5041.8
2.5°	5064.6	5041.8	4991.5	5037.5	5028.3
5°	5041.8	5019.1	4959.6	5000.7	4987.2
7.5°	5000.7	4973.5	4909.7	4927.6	4904.8
10°	4946.0	4914.0	4823.0	4809.0	4781.9
12.5°	4877.7	4836.6	4713.1	4686.0	4635.6
15°	4795.4	4745.1	4590.2	4503.5	4458.0
17.5°	4699.6	4626.5	4434.8	4334.5	4261.4
20°	4590.2	4498.7	4270.6	4156.9	4056.2
22.5°	4471.6	4366.5	4101.7	3946.8	3878.5
25°	4352.9	4206.8	3905.7	3718.8	3650.1
27.5°	4211.6	4056.2	3723.1	3508.7	3403.6
30°	4061.0	3887.3	3522.3	3289.8	3166.4
32.5°	3914.9	3704.7	3331.0	3057.1	2942.8
35°	3750.7	3517.9	3116.6	2829.1	2728.4
37.5°	3591.1	3339.8	2915.7	2600.5	2486.8
40°	3422.0	3148.6	2705.6	2381.7	2263.1
42.5°	3248.7	2956.8	2496.0	2158.1	2044.3
45°	3066.3	2760.3	2281.5	1957.2	1847.8
47.5°	2892.9	2569.1	2076.3	1751.9	1651.7
50°	2701.2	2377.4	1875.4	1560.3	1464.9
52.5°	2513.9	2171.6	1683.7	1382.6	1295.9
55°	2331.3	1975.6	1482.7	1209.3	1122.6
57.5°	2144.6	1779.5	1305.1	1049.6	976.4
60°	1952.8	1587.9	1117.8	885.4	812.3
62.5°	1766.0	1401.0	958.1	739.3	702.9
65°	1574.2	1204.4	793.9	639.0	624.9
67.5°	1391.8	1021.9	639.0	561.0	547.5
70°	1200.0	844.3	529.1	483.6	465.2
72.5°	1017.5	679.7	442.5	406.1	396.9
75°	839.4	519.9	365.0	333.0	328.7
77.5°	661.7	369.4	287.6	269.2	259.9
80°	497.2	264.8	218.8	201.0	201.0
82.5°	346.6	178.1	150.6	141.4	141.4
85°	196.1	100.3	86.6	86.6	86.6
87.5°	73.1	36.3	36.3	31.9	31.9
90°	3.1	38.9	64.9	81.4	87.6
92.5°	81.4	68.3	78.0	84.5	87.6
95°	211.0	103.8	126.5	143.2	139.7
97.5°	380.2	113.9	165.6	175.6	178.7
100°	575.3	130.1	185.2	211.0	217.7
102.5°	789.6	783.4	191.7	227.3	237.3
105°	987.9	1085.6	198.4	233.9	247.0
107.5°	1218.7	1299.7	204.9	240.4	253.5
110°	1439.8	1507.8	568.8	243.9	256.6

TEST NUMBER: P913013

CATALOG NUMBER: DFN2DIP-TR4F0-110D120US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1647.9	1706.1	1651.0	250.1	260.1
115°	1868.6	1923.8	2005.2	500.5	266.7
117.5°	2060.4	2125.3	2180.8	1715.7	864.5
120°	2275.0	2323.6	2382.2	2421.3	1982.4
122.5°	2456.8	2508.9	2574.1	2593.4	2596.8
125°	2642.0	2684.4	2746.2	2769.0	2778.6
127.5°	2811.0	2856.6	2905.6	2938.0	2941.1
130°	2970.3	3022.5	3058.0	3093.9	3090.8
132.5°	3132.8	3175.3	3210.8	3240.2	3237.1
135°	3269.4	3321.6	3350.5	3383.3	3376.8
137.5°	3412.3	3451.2	3484.0	3516.4	3506.8
140°	3552.0	3578.2	3613.7	3643.1	3626.9
142.5°	3669.2	3692.1	3734.1	3760.0	3743.8
145°	3792.8	3789.3	3844.5	3867.3	3851.0
147.5°	3899.7	3890.0	3945.3	3961.5	3948.7
150°	4003.8	3981.1	4033.2	4052.5	4036.3
152.5°	4091.4	4065.6	4114.3	4133.9	4111.2
155°	4175.9	4147.0	4186.0	4205.3	4179.5
157.5°	4244.3	4218.4	4247.8	4270.5	4244.3
160°	4302.9	4283.3	4302.9	4322.2	4299.5
162.5°	4354.7	4335.4	4351.6	4374.3	4345.1
165°	4400.2	4380.9	4390.5	4413.4	4390.5
167.5°	4436.1	4416.4	4426.5	4449.2	4419.9
170°	4465.4	4445.8	4452.3	4475.0	4445.8
172.5°	4484.7	4465.4	4472.0	4494.8	4465.4
175°	4500.9	4478.1	4484.7	4507.5	4475.0
177.5°	4507.5	4484.7	4488.2	4511.0	4481.7
180°	4491.3	4491.3	4491.3	4491.3	4491.3

TEST NUMBER: P913013

CATALOG NUMBER: DFN2DIP-TR4F0-110D120US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.38	12.17	12.40	13.19	14.54	7.36	8.14	8.37	9.16	10.52
	3H	13.06	13.76	14.08	14.79	16.16	8.54	9.24	9.57	10.27	11.65
	4H	13.66	14.33	14.70	15.36	16.74	8.99	9.66	10.03	10.68	12.07
	6H	14.08	14.69	15.13	15.73	17.12	9.31	9.92	10.36	10.96	12.35
	8H	14.21	14.79	15.26	15.84	17.23	9.40	9.98	10.45	11.03	12.42
	12H	14.27	14.82	15.32	15.86	17.28	9.44	10.00	10.50	11.04	12.45
4H	2H	11.40	12.06	12.44	13.09	14.47	7.95	8.61	8.99	9.64	11.02
	3H	13.22	13.77	14.27	14.83	16.23	9.29	9.85	10.34	10.90	12.30
	4H	13.91	14.42	14.97	15.47	16.88	9.84	10.35	10.90	11.39	12.81
	6H	14.42	14.86	15.49	15.93	17.34	10.26	10.69	11.32	11.76	13.18
	8H	14.60	15.00	15.66	16.07	17.50	10.39	10.79	11.45	11.86	13.29
	12H	14.69	15.06	15.77	16.13	17.57	10.45	10.82	11.53	11.89	13.33
8H	4H	13.88	14.28	14.94	15.34	16.77	10.12	10.52	11.18	11.59	13.02
	6H	14.44	14.77	15.53	15.88	17.31	10.64	10.97	11.72	12.08	13.50
	8H	14.66	14.95	15.75	16.04	17.49	10.83	11.12	11.92	12.21	13.66
	12H	14.79	15.05	15.89	16.14	17.62	10.94	11.20	12.04	12.29	13.77
12H	4H	13.83	14.19	14.91	15.27	16.70	10.12	10.49	11.20	11.56	13.00
	6H	14.42	14.71	15.51	15.80	17.24	10.68	10.98	11.78	12.07	13.51
	8H	14.63	14.89	15.73	15.98	17.46	10.89	11.15	11.99	12.24	13.72

END OF REPORT