

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915461

Luminaire Tested: DFN2DIP-TR4F0-040D050US927-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915461
REPORT IS A COMBINATION OF REPORTS P901908 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D050US927-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6614.7 lumens
Efficiency: N/A
Efficacy: 94.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 69.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915461
CATALOG NUMBER: DFN2DIP-TR4F0-040D050US927-RLLONL

Luminous Intensity Polar Plot

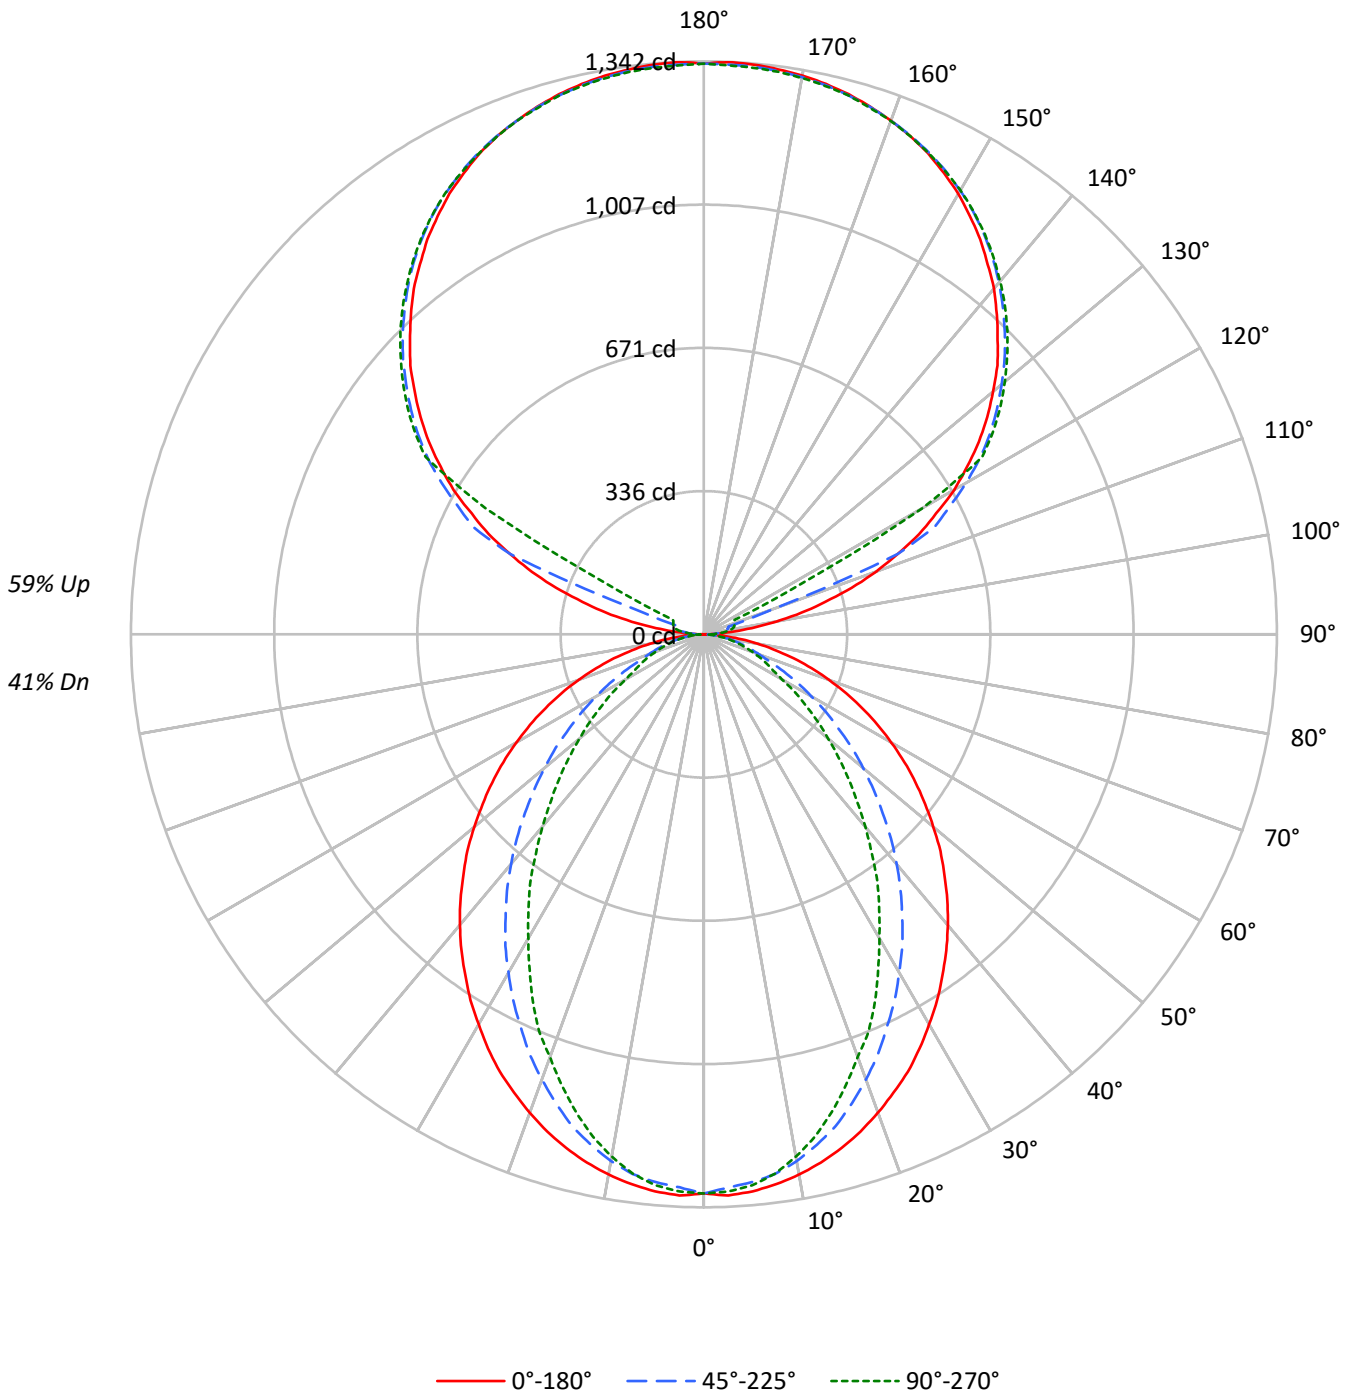



TEST NUMBER: P915461

CATALOG NUMBER: DFN2DIP-TR4F0-040D050US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41	41	41	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	44	38	36	35	35	35	35	30
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30	30	30	30	26
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26	26	26	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	23	23	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21	21	21	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	19	19	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	21	19	17	17	17	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	15	15	15	13
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	18	16	14	14	14	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1040	1040	1040
5°	1042	1024	1030
10°	1032	1004	997
15°	1018	971	945
20°	999	925	881
25°	980	874	820
30°	954	821	742
35°	928	764	674
40°	903	706	595
45°	873	641	524
50°	842	576	454
55°	810	506	388
60°	772	432	319
65°	729	358	287
70°	677	289	260
75°	611	254	236
80°	517	213	205
85°	360	142	154

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 873 cd/sqm



TEST NUMBER: P915461
 CATALOG NUMBER: DFN2DIP-TR4F0-040D050US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	1.9
10°-20°	336.9	5.1
20°-30°	473.1	7.2
30°-40°	515.7	7.8
40°-50°	473.9	7.2
50°-60°	372.2	5.6
60°-70°	242.3	3.7
70°-80°	124.7	1.9
80°-90°	34.2	0.5
90°-100°	44.1	0.7
100°-110°	164.3	2.5
110°-120°	435.8	6.6
120°-130°	722.8	10.9
130°-140°	767.8	11.6
140°-150°	713.6	10.8
150°-160°	573.7	8.7
160°-170°	369.7	5.6
170°-180°	127.2	1.9
0°-30°	932.7	14.1
0°-40°	1448.4	21.9
0°-60°	2294.6	34.7
0°-90°	2695.7	40.8
90°-120°	644.2	9.7
90°-150°	2848.4	43.1
90°-180°	3919.0	59.2
0°-180°	6614.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	1	12	19	24	26	6
95°	63	31	38	43	42	74
105°	294	323	59	70	74	314
115°	556	573	597	149	79	548
125°	786	799	817	824	827	701
135°	973	989	997	1007	1005	752
145°	1129	1128	1144	1151	1146	706
155°	1243	1234	1246	1252	1244	573
165°	1310	1304	1307	1314	1307	370
175°	1340	1333	1335	1342	1332	127
180°	1337	1337	1337	1337	1337	



TEST NUMBER: P915461

CATALOG NUMBER: DFN2DIP-TR4F0-040D050US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	1.0	11.6	19.3	24.2	26.1
92.5°	24.2	20.4	23.2	25.2	26.1
95°	62.8	30.9	37.7	42.6	41.6
97.5°	113.1	33.9	49.3	52.3	53.2
100°	171.3	38.7	55.1	62.8	64.8
102.5°	235.0	233.1	57.1	67.7	70.7
105°	294.1	323.1	59.0	69.6	73.5
107.5°	362.7	386.8	61.0	71.5	75.5
110°	428.6	448.8	169.3	72.6	76.4



TEST NUMBER: P915461

CATALOG NUMBER: DFN2DIP-TR4F0-040D050US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	490.4	507.8	491.4	74.5	77.4
115°	556.2	572.6	596.8	149.0	79.4
117.5°	613.2	632.6	649.1	510.6	257.3
120°	677.1	691.6	709.0	720.6	590.0
122.5°	731.2	746.7	766.1	771.9	772.9
125°	786.3	799.0	817.4	824.1	827.0
127.5°	836.6	850.2	864.8	874.4	875.4
130°	884.1	899.6	910.1	920.8	920.0
132.5°	932.5	945.1	955.6	964.4	963.5
135°	973.1	988.6	997.2	1007.0	1005.0
137.5°	1015.6	1027.2	1037.0	1046.6	1043.8
140°	1057.2	1065.0	1075.5	1084.3	1079.5
142.5°	1092.1	1098.9	1111.4	1119.1	1114.3
145°	1128.9	1127.8	1144.2	1151.0	1146.2
147.5°	1160.7	1157.8	1174.3	1179.1	1175.3
150°	1191.7	1184.9	1200.4	1206.2	1201.3
152.5°	1217.7	1210.1	1224.6	1230.4	1223.6
155°	1242.9	1234.3	1245.9	1251.6	1244.0
157.5°	1263.2	1255.5	1264.2	1271.1	1263.2
160°	1280.7	1274.9	1280.7	1286.4	1279.7
162.5°	1296.1	1290.4	1295.1	1301.9	1293.2
165°	1309.6	1303.9	1306.8	1313.5	1306.8
167.5°	1320.3	1314.5	1317.5	1324.2	1315.5
170°	1329.0	1323.2	1325.2	1331.9	1323.2
172.5°	1334.8	1329.0	1331.0	1337.8	1329.0
175°	1339.7	1332.8	1334.8	1341.6	1331.9
177.5°	1341.6	1334.8	1335.9	1342.6	1333.9
180°	1336.7	1336.7	1336.7	1336.7	1336.7



TEST NUMBER: P915461
 CATALOG NUMBER: DFN2DIP-TR4F0-040D050US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.35	7.11	7.39	8.15	9.55	2.32	3.08	3.36	4.13	5.53
	3H	8.02	8.70	9.07	9.75	11.17	3.51	4.19	4.56	5.24	6.66
	4H	8.63	9.27	9.69	10.32	11.75	3.96	4.60	5.02	5.65	7.08
	6H	9.05	9.64	10.12	10.69	12.13	4.27	4.87	5.34	5.92	7.36
	8H	9.17	9.73	10.24	10.80	12.24	4.36	4.93	5.44	6.00	7.43
	12H	9.23	9.76	10.31	10.83	12.29	4.41	4.94	5.48	6.01	7.46
4H	2H	6.36	7.00	7.43	8.06	9.48	2.91	3.55	3.98	4.61	6.03
	3H	8.18	8.72	9.26	9.80	11.24	4.26	4.79	5.33	5.87	7.31
	4H	8.87	9.36	9.95	10.43	11.89	4.80	5.29	5.88	6.36	7.82
	6H	9.38	9.80	10.47	10.90	12.35	5.22	5.64	6.31	6.73	8.19
	8H	9.56	9.95	10.65	11.04	12.51	5.35	5.74	6.43	6.82	8.29
	12H	9.65	10.00	10.75	11.10	12.58	5.41	5.76	6.51	6.86	8.34
8H	4H	8.84	9.23	9.92	10.31	11.78	5.08	5.47	6.16	6.55	8.02
	6H	9.40	9.72	10.51	10.85	12.32	5.59	5.92	6.70	7.04	8.51
	8H	9.62	9.90	10.73	11.01	12.50	5.78	6.07	6.90	7.18	8.66
	12H	9.75	10.00	10.87	11.11	12.63	5.90	6.15	7.02	7.26	8.78
12H	4H	8.78	9.14	9.89	10.24	11.71	5.08	5.43	6.18	6.53	8.01
	6H	9.37	9.66	10.49	10.77	12.25	5.64	5.93	6.76	7.04	8.52
	8H	9.59	9.84	10.71	10.95	12.47	5.85	6.10	6.97	7.21	8.73