

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915464

Luminaire Tested: DFN2DIP-TR4F0-040D060US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915464
REPORT IS A COMBINATION OF REPORTS P900406 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D060US927-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6899.9 lumens
Efficiency: N/A
Efficacy: 90.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 76.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915464

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US927-RLLFLL

Luminous Intensity Polar Plot

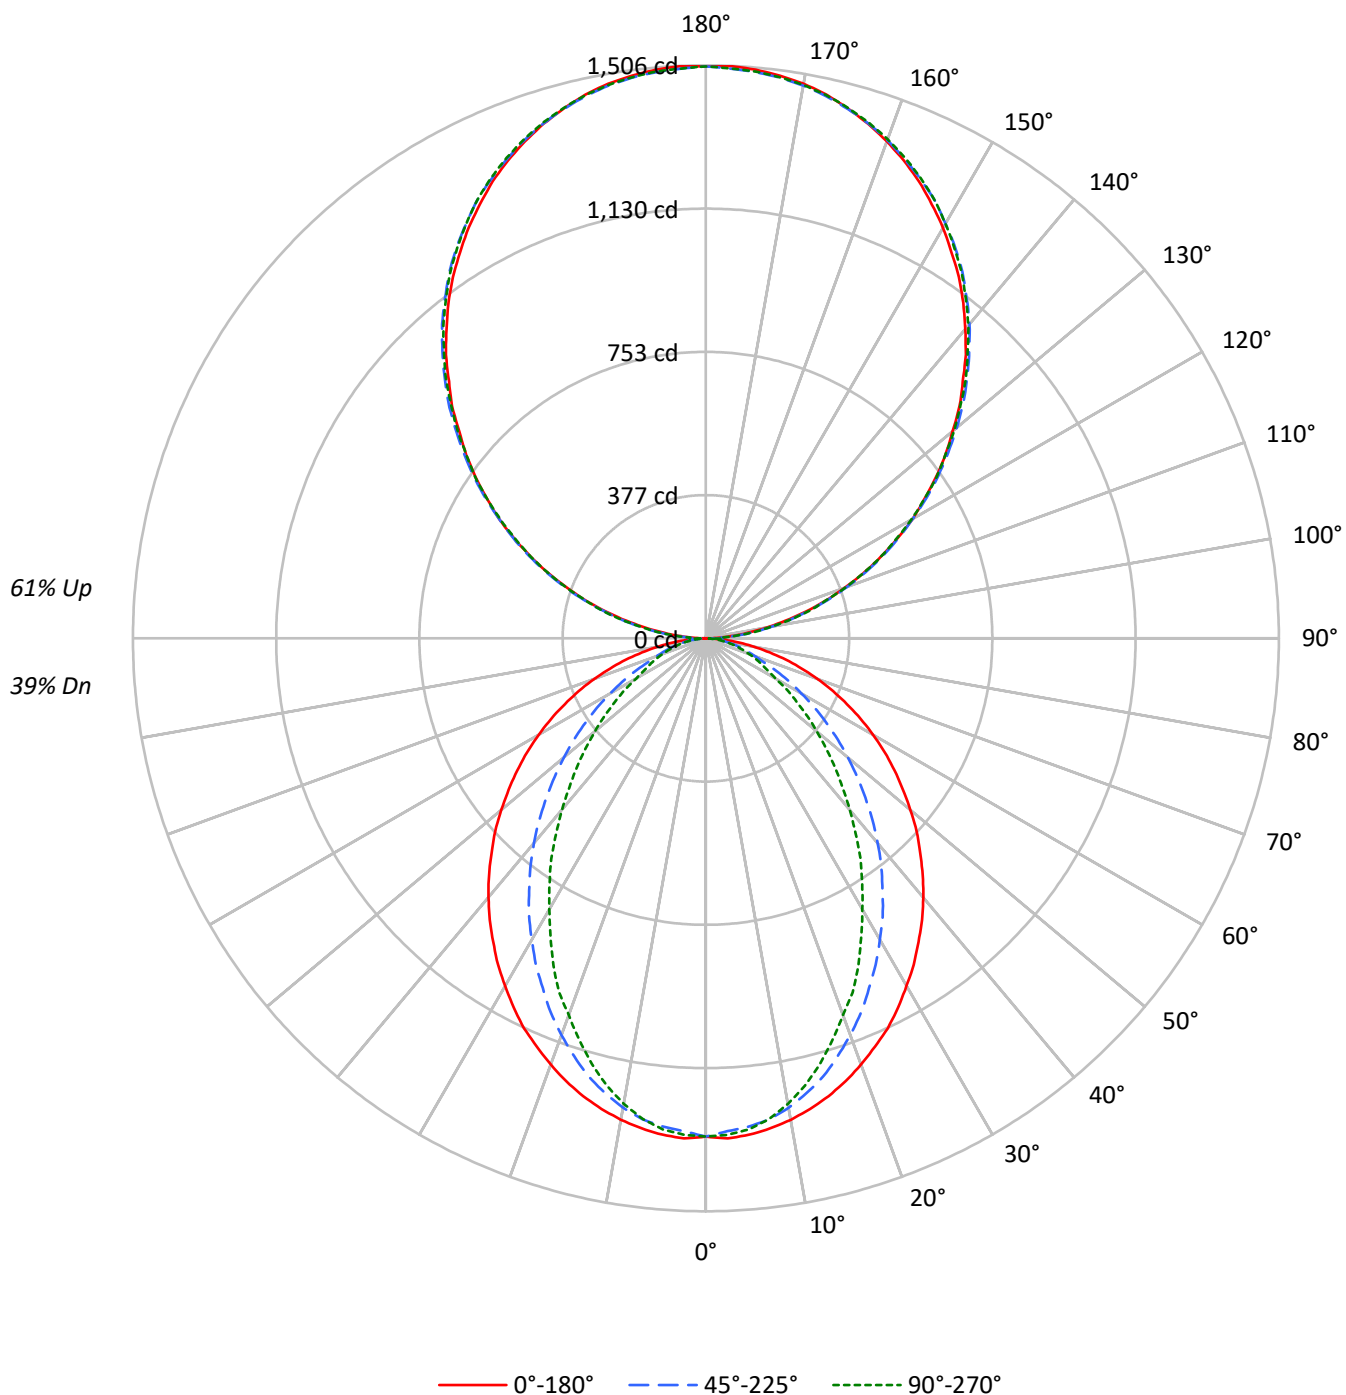

TEST NUMBER: P915464

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46
1	96	92	88	85	87	83	80	78	68	66	64	54	53	51	41	40	40
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29
4	73	63	55	50	66	58	51	46	48	43	39	38	35	32	30	27	26
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	24	22
6	62	51	43	37	56	46	40	35	39	33	30	31	28	25	25	22	20
7	57	46	38	33	52	42	35	30	35	30	26	29	25	22	22	20	18
8	53	41	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1040	1040	1040
5°	1042	1024	1030
10°	1032	1004	997
15°	1018	971	945
20°	999	925	881
25°	980	874	820
30°	954	821	742
35°	928	764	674
40°	903	706	595
45°	873	641	524
50°	842	576	454
55°	810	506	388
60°	772	432	319
65°	729	358	287
70°	677	289	260
75°	611	254	236
80°	517	213	205
85°	360	142	154

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1170 cd/sqm

TEST NUMBER: P915464

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	1.8
10°-20°	336.9	4.9
20°-30°	473.1	6.9
30°-40°	515.7	7.5
40°-50°	473.9	6.9
50°-60°	372.2	5.4
60°-70°	242.3	3.5
70°-80°	124.7	1.8
80°-90°	36.1	0.5
90°-100°	93.0	1.3
100°-110°	295.6	4.3
110°-120°	505.8	7.3
120°-130°	665.2	9.6
130°-140°	746.6	10.8
140°-150°	732.2	10.6
150°-160°	614.2	8.9
160°-170°	407.3	5.9
170°-180°	142.4	2.1
0°-30°	932.7	13.5
0°-40°	1448.4	21.0
0°-60°	2294.6	33.3
0°-90°	2697.7	39.1
90°-120°	894.4	13.0
90°-150°	3038.4	44.0
90°-180°	4202.0	60.9
0°-180°	6899.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	1	16	44	42	43	7
95°	66	79	81	81	79	74
105°	273	276	279	282	282	288
115°	508	515	512	511	508	502
125°	738	750	746	742	740	660
135°	955	969	972	970	967	738
145°	1159	1168	1176	1177	1172	724
155°	1326	1329	1333	1340	1336	610
165°	1442	1441	1441	1450	1443	407
175°	1500	1497	1494	1503	1496	143
180°	1503	1503	1503	1503	1503	

TEST NUMBER: P915464

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US927-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	1.3	16.3	44.4	41.7	43.0
92.5°	28.1	38.1	39.5	40.8	40.8
95°	66.1	78.8	81.1	81.1	78.8
97.5°	110.1	121.9	126.9	126.9	126.9
100°	160.9	171.3	174.9	174.9	173.6
102.5°	214.4	222.0	227.0	228.4	227.0
105°	272.8	276.5	279.2	281.5	281.5
107.5°	330.8	336.3	336.3	337.2	330.8
110°	387.1	394.3	394.3	394.3	390.6

TEST NUMBER: P915464

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US927-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	447.7	455.4	454.1	450.4	447.7
115°	507.6	514.8	512.5	511.2	507.6
117.5°	567.0	576.9	570.5	567.0	563.3
120°	626.8	636.8	626.8	626.8	622.7
122.5°	681.1	693.8	687.5	683.9	681.1
125°	738.2	749.6	745.9	741.9	740.5
127.5°	794.0	808.0	803.0	797.6	794.0
130°	846.1	862.4	860.2	857.5	852.5
132.5°	904.6	917.3	918.1	911.8	908.2
135°	954.9	968.9	971.6	970.3	966.6
137.5°	1011.1	1022.4	1024.7	1023.7	1018.3
140°	1060.5	1071.8	1078.2	1078.2	1073.2
142.5°	1111.2	1122.5	1126.2	1127.5	1122.5
145°	1159.3	1168.3	1175.6	1176.9	1172.0
147.5°	1202.3	1213.6	1219.1	1221.3	1216.3
150°	1246.7	1254.4	1259.4	1263.4	1259.4
152.5°	1286.1	1293.9	1300.2	1305.2	1300.2
155°	1325.6	1329.2	1333.2	1339.7	1335.5
157.5°	1359.5	1362.3	1364.5	1373.6	1367.3
160°	1390.0	1392.7	1394.0	1401.7	1396.3
162.5°	1418.0	1418.0	1419.4	1428.0	1421.6
165°	1442.0	1440.7	1440.7	1449.8	1443.4
167.5°	1463.8	1459.8	1459.8	1468.8	1462.4
170°	1480.1	1476.5	1475.1	1484.2	1476.5
172.5°	1491.4	1487.8	1486.4	1495.5	1487.8
175°	1500.5	1496.9	1494.1	1503.2	1495.5
177.5°	1505.5	1501.9	1499.1	1506.8	1499.1
180°	1503.2	1503.2	1503.2	1503.2	1503.2

TEST NUMBER: P915464

CATALOG NUMBER: DFN2DIP-TR4F0-040D060US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.17	6.91	7.22	7.97	9.39	2.14	2.89	3.19	3.94	5.36
	3H	7.84	8.51	8.90	9.57	11.01	3.32	3.99	4.38	5.05	6.49
	4H	8.44	9.08	9.51	10.14	11.59	3.77	4.40	4.84	5.47	6.91
	6H	8.86	9.44	9.94	10.51	11.97	4.09	4.67	5.17	5.74	7.20
	8H	8.98	9.54	10.07	10.62	12.07	4.18	4.73	5.26	5.81	7.27
	12H	9.04	9.57	10.13	10.64	12.12	4.22	4.74	5.31	5.82	7.30
4H	2H	6.17	6.81	7.25	7.87	9.32	2.72	3.36	3.80	4.42	5.87
	3H	8.00	8.52	9.08	9.61	11.07	4.07	4.60	5.15	5.69	7.15
	4H	8.69	9.17	9.78	10.25	11.73	4.61	5.10	5.71	6.18	7.66
	6H	9.20	9.61	10.29	10.71	12.19	5.03	5.44	6.13	6.55	8.02
	8H	9.37	9.76	10.47	10.85	12.34	5.16	5.54	6.26	6.64	8.13
	12H	9.46	9.81	10.58	10.92	12.41	5.22	5.57	6.34	6.68	8.17
8H	4H	8.65	9.03	9.75	10.13	11.62	4.89	5.27	5.99	6.37	7.86
	6H	9.21	9.53	10.33	10.67	12.15	5.40	5.72	6.53	6.86	8.35
	8H	9.43	9.71	10.55	10.82	12.33	5.60	5.88	6.72	6.99	8.50
	12H	9.56	9.81	10.69	10.92	12.47	5.71	5.96	6.84	7.07	8.62
12H	4H	8.60	8.95	9.71	10.05	11.55	4.89	5.24	6.01	6.35	7.84
	6H	9.19	9.46	10.31	10.58	12.09	5.45	5.73	6.58	6.85	8.36
	8H	9.40	9.65	10.53	10.76	12.31	5.66	5.91	6.79	7.02	8.57

END OF REPORT