

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915467

Luminaire Tested: DFN2DIP-TR4F0-040D070US927-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915467
REPORT IS A COMBINATION OF REPORTS P901943 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D070US927-FLLONL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8626.8 lumens
Efficiency: N/A
Efficacy: 102.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 84.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915467
CATALOG NUMBER: DFN2DIP-TR4F0-040D070US927-FLLONL

Luminous Intensity Polar Plot

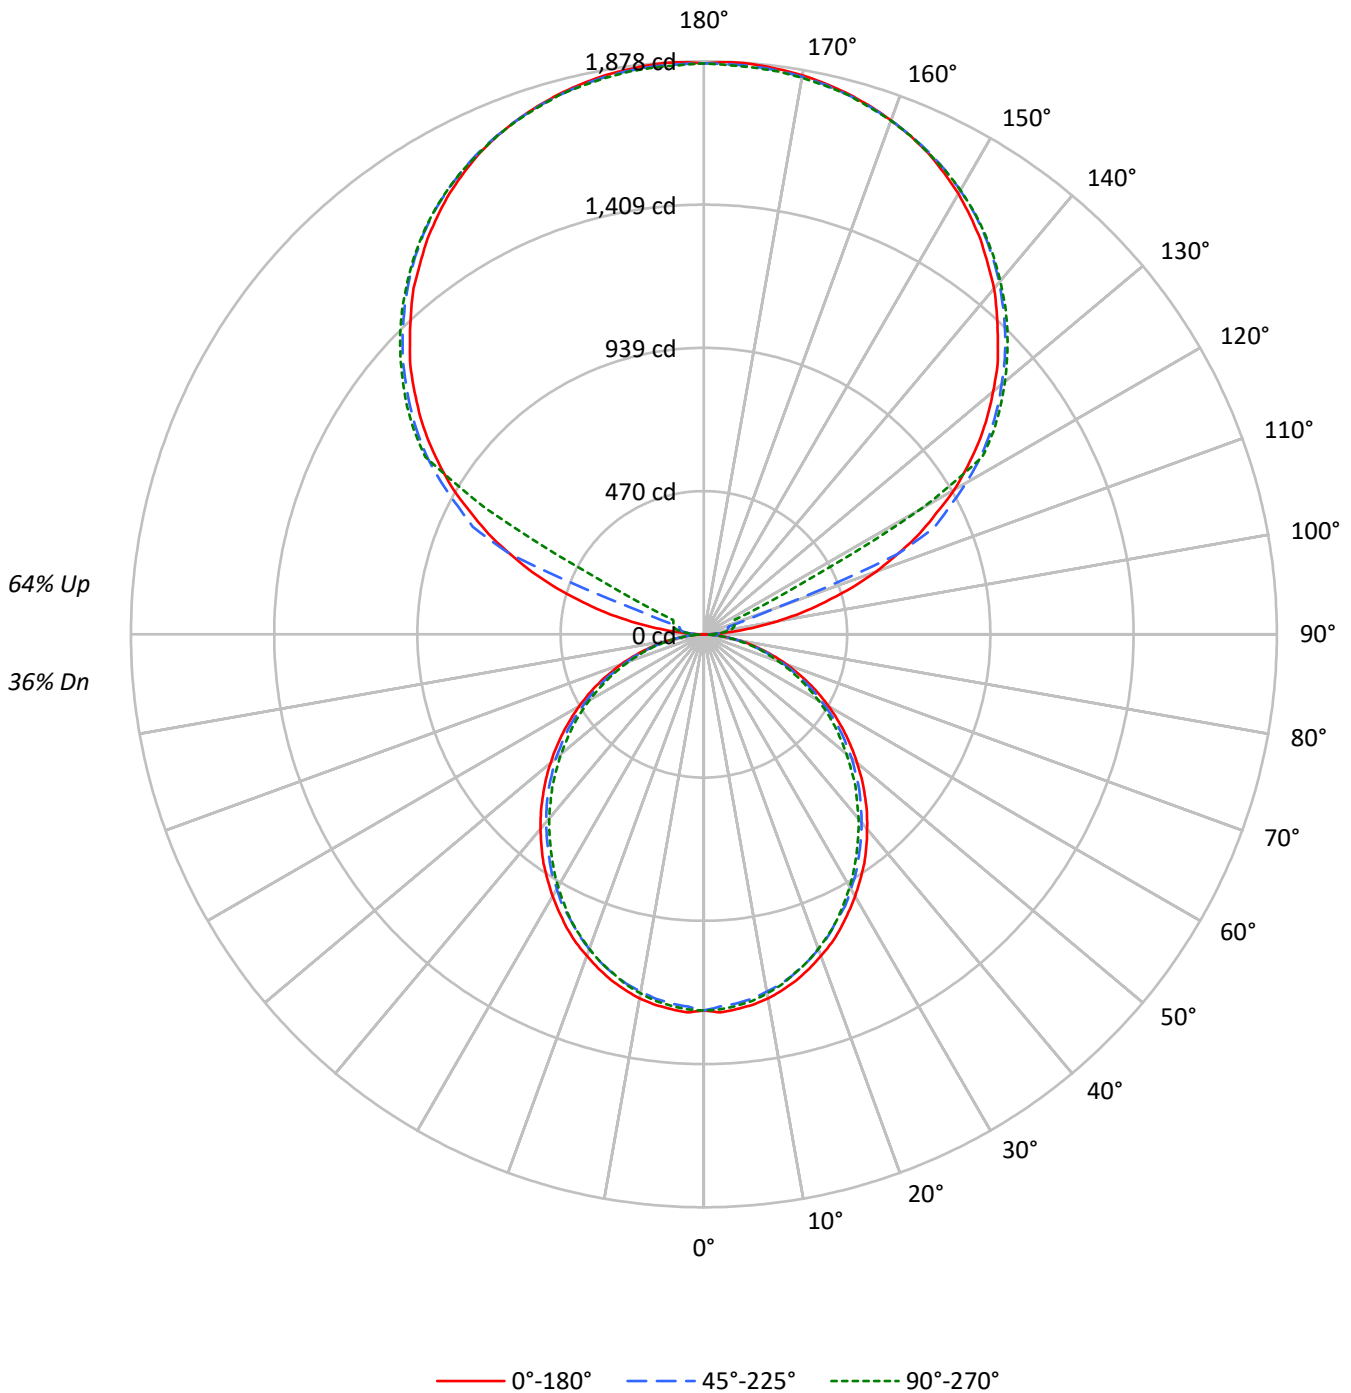



TEST NUMBER: P915467
 CATALOG NUMBER: DFN2DIP-TR4F0-040D070US927-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	36				36
1	95	90	87	83	86	82	79	76	66	64	62	52	50	49	39	38	37	31				31
2	86	79	73	68	78	72	67	62	58	54	51	46	43	41	34	32	31	26				26
3	79	69	62	57	71	63	57	52	51	47	43	40	37	35	30	28	26	22				22
4	72	61	54	48	65	56	49	44	45	41	37	36	32	30	27	25	23	19				19
5	66	55	47	41	59	50	43	38	41	35	32	32	28	26	24	22	20	16				16
6	61	49	41	35	55	45	38	33	37	31	27	29	25	22	22	19	17	14				14
7	56	44	36	31	51	40	33	29	33	28	24	26	23	20	20	17	15	13				13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	18	16	14	11				11
9	48	36	29	24	44	33	27	22	28	23	19	22	18	16	17	14	12	10				10
10	45	33	26	21	41	31	24	20	25	20	17	20	17	14	16	13	11	9				9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	980	980	980
5°	981	966	972
10°	973	953	959
15°	959	937	939
20°	939	915	918
25°	920	889	893
30°	896	865	862
35°	873	836	829
40°	845	807	798
45°	817	778	766
50°	787	748	729
55°	754	713	695
60°	718	671	656
65°	679	628	610
70°	628	575	561
75°	559	512	515
80°	475	431	428
85°	344	293	284

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 993 cd/sqm



TEST NUMBER: P915467

CATALOG NUMBER: DFN2DIP-TR4F0-040D070US927-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.0	1.3
10°-20°	326.5	3.8
20°-30°	479.8	5.6
30°-40°	557.3	6.5
40°-50°	556.6	6.5
50°-60°	485.3	5.6
60°-70°	358.8	4.2
70°-80°	203.0	2.4
80°-90°	56.9	0.7
90°-100°	61.7	0.7
100°-110°	230.0	2.7
110°-120°	610.1	7.1
120°-130°	1011.9	11.7
130°-140°	1074.9	12.5
140°-150°	999.0	11.6
150°-160°	803.2	9.3
160°-170°	517.5	6.0
170°-180°	178.1	2.1
0°-30°	922.4	10.7
0°-40°	1479.7	17.2
0°-60°	2521.7	29.2
0°-90°	3140.3	36.4
90°-120°	901.9	10.5
90°-150°	3987.7	46.2
90°-180°	5487.0	63.6
0°-180°	8626.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1233	1233	1233	1233	1233	
5°	1233	1228	1215	1225	1222	117
15°	1174	1167	1151	1156	1150	331
25°	1062	1053	1033	1035	1033	489
35°	916	905	886	878	873	572
45°	746	738	720	707	702	576
55°	564	557	543	529	523	505
65°	381	373	362	351	345	376
75°	199	197	191	184	186	213
85°	49	48	46	43	42	54
90°	1	16	27	34	36	8
95°	88	43	53	60	58	104
105°	412	452	83	97	103	440
115°	779	802	836	209	111	767
125°	1101	1119	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1612	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1834	1826	1830	1839	1830	518
175°	1876	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	



TEST NUMBER: P915467

CATALOG NUMBER: DFN2DIP-TR4F0-040D070US927-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1233.0	1233.0	1233.0	1233.0	1233.0
2.5°	1240.2	1234.2	1221.1	1233.0	1230.7
5°	1233.0	1228.3	1215.2	1224.6	1222.4
7.5°	1224.6	1217.6	1204.5	1214.1	1211.7
10°	1211.7	1203.4	1189.2	1198.6	1195.1
12.5°	1193.8	1186.8	1172.6	1178.5	1176.1
15°	1173.7	1166.6	1151.2	1156.0	1150.1
17.5°	1148.8	1141.8	1126.3	1132.2	1126.3
20°	1121.5	1114.4	1097.9	1101.4	1096.8
22.5°	1094.3	1083.6	1068.2	1068.2	1065.8
25°	1062.2	1052.8	1032.7	1035.0	1032.7
27.5°	1026.7	1018.3	1003.1	999.5	993.6
30°	991.2	981.7	963.9	960.4	955.6
32.5°	953.2	946.2	927.2	920.0	915.2
35°	916.5	904.7	885.7	878.5	872.6
37.5°	875.0	864.3	845.3	837.0	831.1
40°	832.3	822.8	803.7	793.2	788.5
42.5°	790.8	781.2	762.4	750.4	743.4
45°	745.8	737.5	719.6	706.7	701.9
47.5°	701.9	693.6	674.6	661.6	654.5
50°	655.6	649.7	633.1	616.5	610.5
52.5°	610.5	602.3	586.9	573.9	565.5
55°	564.4	557.2	543.0	528.8	522.9
57.5°	518.1	512.2	496.7	482.5	477.8
60°	471.8	467.1	450.6	437.5	434.0
62.5°	426.8	418.5	406.7	394.8	390.1
65°	380.6	373.4	361.6	350.9	345.1
67.5°	333.2	327.2	316.6	308.3	303.6
70°	289.3	284.6	273.9	265.5	260.9
72.5°	244.3	239.5	233.6	225.3	221.7
75°	199.2	196.9	190.8	183.8	186.2
77.5°	158.8	154.1	151.7	148.1	144.7
80°	118.6	117.3	114.9	111.5	109.1
82.5°	80.6	80.6	79.5	74.7	74.7
85°	48.6	47.5	46.3	42.6	41.5
87.5°	21.4	19.0	16.6	13.1	11.8
90°	1.3	16.2	27.0	33.9	36.5
92.5°	33.9	28.4	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.5
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.5	79.9	94.7	98.9
105°	411.7	452.3	82.6	97.4	102.9
107.5°	507.8	541.6	85.4	100.2	105.7
110°	600.0	628.3	237.0	101.6	106.9



TEST NUMBER: P915467

CATALOG NUMBER: DFN2DIP-TR4F0-040D070US927-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.7	710.9	687.9	104.2	108.4
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.6	885.6	908.7	714.9	360.2
120°	947.9	968.2	992.7	1008.9	826.1
122.5°	1023.7	1045.4	1072.6	1080.6	1082.0
125°	1100.9	1118.6	1144.3	1153.8	1157.8
127.5°	1171.3	1190.3	1210.7	1224.2	1225.5
130°	1237.7	1259.4	1274.2	1289.2	1287.9
132.5°	1305.4	1323.1	1337.9	1350.1	1348.8
135°	1362.3	1384.0	1396.1	1409.8	1407.1
137.5°	1421.8	1438.1	1451.8	1465.3	1461.3
140°	1480.0	1491.0	1505.8	1518.0	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1560.0
145°	1580.4	1579.0	1601.9	1611.5	1604.7
147.5°	1624.9	1621.0	1643.9	1650.7	1645.4
150°	1668.3	1658.9	1680.6	1688.6	1681.9
152.5°	1704.9	1694.1	1714.4	1722.5	1713.1
155°	1740.1	1728.0	1744.2	1752.3	1741.5
157.5°	1768.5	1757.8	1770.0	1779.5	1768.5
160°	1793.0	1784.8	1793.0	1801.0	1791.5
162.5°	1814.6	1806.5	1813.2	1822.7	1810.5
165°	1833.5	1825.5	1829.5	1839.0	1829.5
167.5°	1848.5	1840.2	1844.4	1853.9	1841.7
170°	1860.7	1852.5	1855.2	1864.7	1852.5
172.5°	1868.8	1860.7	1863.4	1872.9	1860.7
175°	1875.5	1866.0	1868.8	1878.2	1864.7
177.5°	1878.2	1868.8	1870.2	1879.7	1867.4
180°	1871.4	1871.4	1871.4	1871.4	1871.4



TEST NUMBER: P915467
 CATALOG NUMBER: DFN2DIP-TR4F0-040D070US927-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.79	6.54	6.85	7.61	9.06	5.36	6.11	6.42	7.18	8.63
	3H	7.44	8.11	8.52	9.19	10.66	6.97	7.64	8.04	8.72	10.19
	4H	8.02	8.66	9.11	9.74	11.22	7.55	8.19	8.64	9.27	10.74
	6H	8.42	9.00	9.51	10.09	11.57	7.94	8.53	9.04	9.61	11.10
	8H	8.52	9.08	9.62	10.17	11.66	8.04	8.60	9.14	9.70	11.18
	12H	8.56	9.09	9.67	10.18	11.69	8.08	8.61	9.19	9.70	11.21
4H	2H	6.24	6.87	7.33	7.95	9.43	5.89	6.53	6.98	7.61	9.09
	3H	8.09	8.62	9.19	9.73	11.22	7.70	8.23	8.80	9.34	10.83
	4H	8.80	9.29	9.91	10.39	11.90	8.40	8.89	9.50	9.98	11.49
	6H	9.31	9.73	10.42	10.85	12.35	8.90	9.32	10.01	10.44	11.94
	8H	9.46	9.85	10.57	10.96	12.48	9.05	9.44	10.16	10.55	12.07
	12H	9.52	9.88	10.65	11.00	12.53	9.10	9.46	10.23	10.58	12.11
8H	4H	8.99	9.38	10.10	10.49	12.01	8.63	9.02	9.74	10.13	11.65
	6H	9.62	9.94	10.75	11.09	12.61	9.25	9.58	10.39	10.73	12.25
	8H	9.84	10.12	10.98	11.25	12.79	9.47	9.75	10.61	10.88	12.42
	12H	9.96	10.21	11.11	11.34	12.91	9.58	9.83	10.72	10.96	12.53
12H	4H	8.97	9.33	10.10	10.45	11.97	8.62	8.97	9.75	10.10	11.62
	6H	9.64	9.93	10.79	11.06	12.60	9.29	9.58	10.43	10.71	12.25
	8H	9.88	10.13	11.03	11.26	12.83	9.52	9.77	10.67	10.90	12.48