

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915516

Luminaire Tested: DFN2DIP-TR4F0-050D100US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915516
REPORT IS A COMBINATION OF REPORTS P900480 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-050D100US927-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10377.6 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 118.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915516

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US927-RLLFLL

Luminous Intensity Polar Plot

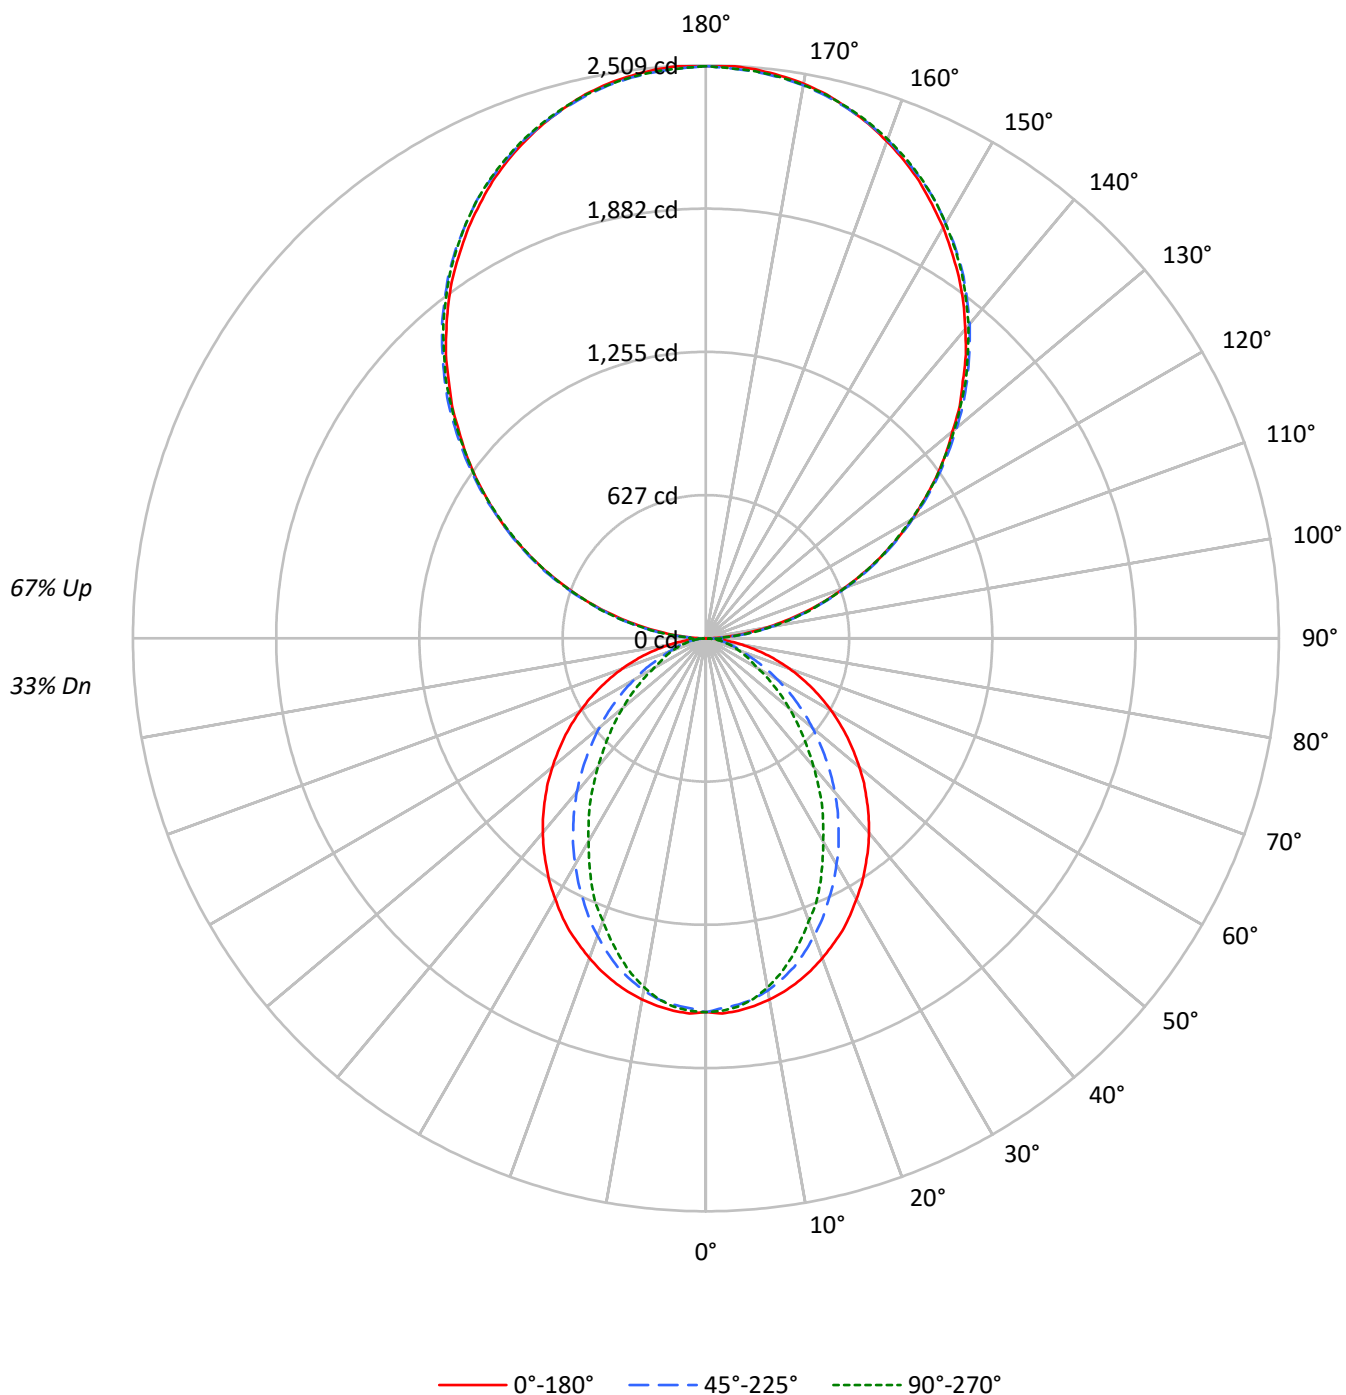

TEST NUMBER: P915516

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1300	1300	1300
5°	1303	1280	1288
10°	1290	1255	1246
15°	1272	1213	1181
20°	1249	1156	1102
25°	1224	1092	1025
30°	1192	1026	927
35°	1161	956	842
40°	1128	882	744
45°	1091	801	655
50°	1052	720	568
55°	1012	632	485
60°	965	541	399
65°	911	448	359
70°	846	361	325
75°	765	318	295
80°	646	267	256
85°	450	178	192

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1954 cd/sqm

TEST NUMBER: P915516

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.4	1.5
10°-20°	421.2	4.1
20°-30°	591.3	5.7
30°-40°	644.6	6.2
40°-50°	592.4	5.7
50°-60°	465.3	4.5
60°-70°	302.9	2.9
70°-80°	155.9	1.5
80°-90°	46.9	0.5
90°-100°	155.0	1.5
100°-110°	492.6	4.7
110°-120°	843.0	8.1
120°-130°	1108.6	10.7
130°-140°	1244.4	12.0
140°-150°	1220.3	11.8
150°-160°	1023.6	9.9
160°-170°	678.9	6.5
170°-180°	237.3	2.3
0°-30°	1165.9	11.2
0°-40°	1810.5	17.4
0°-60°	2868.2	27.6
0°-90°	3373.9	32.5
90°-120°	1490.6	14.4
90°-150°	5063.9	48.8
90°-180°	7004.0	67.5
0°-180°	10377.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1637	1637	1637	1637	1637	
5°	1637	1630	1610	1624	1619	155
15°	1557	1541	1490	1462	1448	439
25°	1413	1366	1268	1207	1185	650
35°	1218	1142	1012	918	886	762
45°	996	896	741	636	600	769
55°	757	641	481	393	364	676
65°	511	391	258	208	203	507
75°	273	169	118	108	107	288
85°	64	33	28	28	28	73
90°	2	27	74	70	72	10
95°	110	131	135	135	131	123
105°	455	461	465	469	469	480
115°	846	858	854	852	846	837
125°	1230	1249	1243	1236	1234	1100
135°	1591	1615	1619	1617	1611	1230
145°	1932	1947	1959	1962	1953	1207
155°	2209	2215	2222	2233	2226	1017
165°	2403	2401	2401	2416	2406	678
175°	2501	2495	2490	2505	2492	238
180°	2505	2505	2505	2505	2505	

TEST NUMBER: P915516

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US927-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1637.0	1637.0	1637.0	1637.0	1637.0
2.5°	1644.4	1637.0	1620.7	1635.6	1632.6
5°	1637.0	1629.7	1610.3	1623.7	1619.3
7.5°	1623.7	1614.9	1594.1	1600.0	1592.5
10°	1605.9	1595.5	1566.0	1561.5	1552.6
12.5°	1583.7	1570.4	1530.3	1521.5	1505.1
15°	1557.0	1540.7	1490.4	1462.3	1447.5
17.5°	1525.9	1502.2	1439.9	1407.4	1383.6
20°	1490.4	1460.7	1386.6	1349.7	1317.0
22.5°	1451.9	1417.8	1331.8	1281.5	1259.3
25°	1413.3	1365.9	1268.1	1207.4	1185.1
27.5°	1367.5	1317.0	1208.9	1139.2	1105.2
30°	1318.6	1262.2	1143.7	1068.2	1028.1
32.5°	1271.1	1202.9	1081.6	992.6	955.5
35°	1217.8	1142.2	1011.9	918.5	885.9
37.5°	1165.9	1084.4	946.7	844.4	807.5
40°	1111.1	1022.3	878.4	773.3	734.8
42.5°	1054.9	960.0	810.4	700.7	663.8
45°	995.6	896.3	740.8	635.5	599.9
47.5°	939.3	834.2	674.1	568.9	536.3
50°	877.1	771.9	608.9	506.6	475.6
52.5°	816.3	705.1	546.7	448.9	420.8
55°	757.0	641.4	481.4	392.6	364.5
57.5°	696.3	577.8	423.7	340.8	317.0
60°	634.1	515.6	362.9	287.5	263.7
62.5°	573.4	454.9	311.1	240.0	228.2
65°	511.1	391.1	257.8	207.5	203.0
67.5°	451.9	331.8	207.5	182.2	177.8
70°	389.7	274.1	171.8	157.0	151.1
72.5°	330.4	220.7	143.7	131.9	128.9
75°	272.6	168.8	118.5	108.1	106.7
77.5°	214.8	119.9	93.4	87.4	84.4
80°	161.4	86.0	71.1	65.2	65.2
82.5°	112.6	57.8	48.9	45.9	45.9
85°	63.7	32.6	28.1	28.1	28.1
87.5°	23.8	11.8	11.8	10.4	10.4
90°	2.3	27.2	74.0	69.5	71.8
92.5°	46.8	63.5	65.8	68.0	68.0
95°	110.3	131.4	135.2	135.2	131.4
97.5°	183.5	203.2	211.5	211.5	211.5
100°	268.2	285.5	291.5	291.5	289.3
102.5°	357.3	370.1	378.4	380.6	378.4
105°	454.7	460.7	465.2	469.1	469.1
107.5°	551.4	560.5	560.5	562.0	551.4
110°	645.1	657.1	657.1	657.1	651.1

TEST NUMBER: P915516

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US927-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	746.2	759.1	756.8	750.8	746.2
115°	846.0	858.0	854.3	852.0	846.0
117.5°	944.9	961.5	950.9	944.9	938.8
120°	1044.6	1061.2	1044.6	1044.6	1037.8
122.5°	1135.2	1156.3	1145.8	1139.8	1135.2
125°	1230.4	1249.3	1243.2	1236.4	1234.2
127.5°	1323.3	1346.7	1338.4	1329.4	1323.3
130°	1410.2	1437.3	1433.6	1429.0	1420.8
132.5°	1507.6	1528.8	1530.3	1519.7	1513.6
135°	1591.4	1614.9	1619.4	1617.2	1611.1
137.5°	1685.1	1704.0	1707.8	1706.3	1697.2
140°	1767.4	1786.3	1796.9	1796.9	1788.6
142.5°	1852.0	1870.9	1876.9	1879.2	1870.9
145°	1932.1	1947.2	1959.3	1961.5	1953.2
147.5°	2003.8	2022.8	2031.8	2035.6	2027.3
150°	2077.9	2090.7	2099.0	2105.8	2099.0
152.5°	2143.6	2156.4	2167.0	2175.3	2167.0
155°	2209.3	2215.3	2222.1	2232.7	2225.9
157.5°	2266.0	2270.5	2274.3	2289.3	2278.8
160°	2316.6	2321.1	2323.3	2336.1	2327.1
162.5°	2363.4	2363.4	2365.6	2379.9	2369.4
165°	2403.4	2401.1	2401.1	2416.2	2405.7
167.5°	2439.7	2432.9	2432.9	2448.0	2437.4
170°	2466.9	2460.8	2458.5	2473.7	2460.8
172.5°	2485.7	2479.7	2477.4	2492.5	2479.7
175°	2500.8	2494.8	2490.3	2505.4	2492.5
177.5°	2509.2	2503.1	2498.5	2511.4	2498.5
180°	2505.4	2505.4	2505.4	2505.4	2505.4

TEST NUMBER: P915516

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.15	6.86	7.25	7.95	9.45	2.13	2.83	3.23	3.93	5.43
	3H	7.82	8.45	8.93	9.55	11.07	3.31	3.94	4.42	5.04	6.56
	4H	8.42	9.02	9.54	10.12	11.65	3.75	4.35	4.87	5.45	6.98
	6H	8.84	9.39	9.96	10.49	12.03	4.07	4.62	5.19	5.72	7.26
	8H	8.96	9.48	10.09	10.61	12.14	4.16	4.68	5.28	5.80	7.33
	12H	9.02	9.52	10.15	10.63	12.18	4.20	4.69	5.33	5.81	7.36
4H	2H	6.16	6.75	7.28	7.86	9.38	2.71	3.31	3.83	4.41	5.93
	3H	7.97	8.47	9.10	9.60	11.14	4.05	4.54	5.18	5.67	7.21
	4H	8.66	9.12	9.80	10.24	11.79	4.59	5.05	5.72	6.17	7.72
	6H	9.17	9.56	10.31	10.70	12.25	5.00	5.39	6.14	6.54	8.09
	8H	9.34	9.71	10.48	10.84	12.41	5.13	5.50	6.27	6.63	8.19
	12H	9.43	9.76	10.59	10.91	12.48	5.19	5.52	6.35	6.67	8.24
8H	4H	8.62	8.99	9.76	10.12	11.68	4.86	5.23	6.00	6.36	7.93
	6H	9.18	9.48	10.34	10.66	12.22	5.38	5.68	6.54	6.85	8.41
	8H	9.40	9.66	10.56	10.81	12.40	5.57	5.83	6.73	6.98	8.57
	12H	9.53	9.76	10.70	10.91	12.53	5.68	5.91	6.85	7.06	8.68
12H	4H	8.57	8.90	9.72	10.04	11.61	4.86	5.19	6.02	6.34	7.91
	6H	9.16	9.42	10.32	10.57	12.16	5.42	5.69	6.59	6.84	8.43
	8H	9.37	9.60	10.54	10.75	12.37	5.63	5.86	6.80	7.01	8.63

END OF REPORT