

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915547

Luminaire Tested: DFN2DIP-TR4F0-060D090US927-FLLONL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P915547  
REPORT IS A COMBINATION OF REPORTS P901983 AND P898849  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-060D090US927-FLLONL  
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11763.8 lumens  
Efficiency: N/A  
Efficacy: 97.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 121  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9781  
Total Harmonic Distortion (THDi): 0.075  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P915547  
CATALOG NUMBER: DFN2DIP-TR4F0-060D090US927-FLLONL

### Luminous Intensity Polar Plot

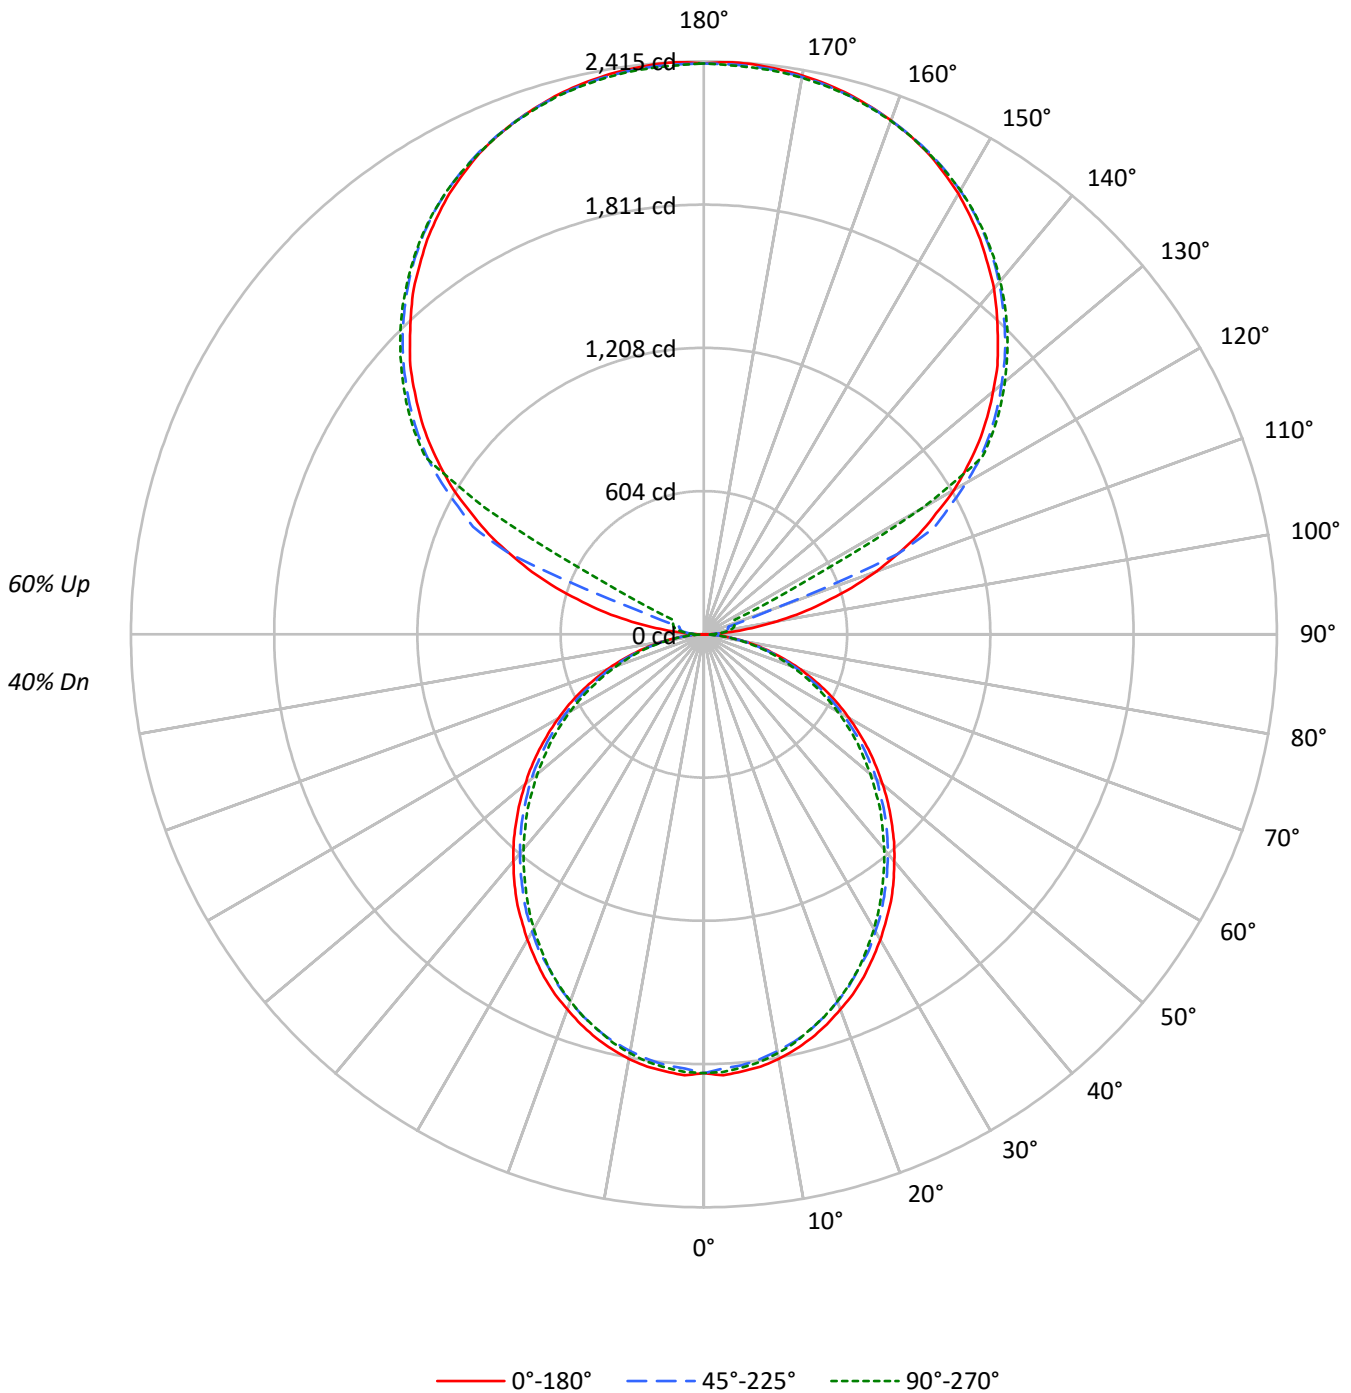



TEST NUMBER: P915547

CATALOG NUMBER: DFN2DIP-TR4F0-060D090US927-FLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	47	47	47	40
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	41	41	40	40	40	40	34
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	33	33	33	33	28
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28	28	28	28	24
4	73	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24	24	24	24	21
5	67	55	47	41	60	50	44	38	42	37	33	34	30	27	26	23	21	21	21	21	18
6	61	49	41	36	56	45	38	33	38	32	28	30	26	23	24	21	19	19	19	19	16
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17	17	17	17	14
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15	15	15	15	12
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	15	13	13	13	13	11
10	46	34	27	22	41	31	25	20	26	21	18	21	18	15	17	14	12	12	12	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1469	1469	1469
5°	1472	1449	1459
10°	1460	1429	1439
15°	1438	1406	1408
20°	1409	1373	1376
25°	1380	1334	1340
30°	1344	1298	1293
35°	1310	1255	1244
40°	1268	1211	1197
45°	1226	1168	1149
50°	1180	1122	1094
55°	1132	1069	1043
60°	1077	1007	984
65°	1018	942	915
70°	943	863	841
75°	838	768	773
80°	712	648	642
85°	515	439	426

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1276 cd/sqm



TEST NUMBER: P915547

CATALOG NUMBER: DFN2DIP-TR4F0-060D090US927-FLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	174.1	1.5
10°-20°	489.8	4.2
20°-30°	719.8	6.1
30°-40°	836.0	7.1
40°-50°	834.9	7.1
50°-60°	728.0	6.2
60°-70°	538.2	4.6
70°-80°	304.5	2.6
80°-90°	84.6	0.7
90°-100°	79.3	0.7
100°-110°	295.8	2.5
110°-120°	784.4	6.7
120°-130°	1301.0	11.1
130°-140°	1382.0	11.7
140°-150°	1284.4	10.9
150°-160°	1032.6	8.8
160°-170°	665.4	5.7
170°-180°	229.0	1.9
0°-30°	1383.6	11.8
0°-40°	2219.6	18.9
0°-60°	3782.5	32.2
0°-90°	4709.8	40.0
90°-120°	1159.5	9.9
90°-150°	5127.0	43.6
90°-180°	7054.0	60.0
0°-180°	11763.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1849	1849	1849	1849	1849	
5°	1849	1842	1823	1837	1834	176
15°	1760	1750	1727	1734	1725	496
25°	1593	1579	1549	1552	1549	733
35°	1375	1357	1328	1318	1309	858
45°	1119	1106	1079	1060	1053	863
55°	847	836	814	793	784	757
65°	571	560	542	526	518	564
75°	299	295	286	276	279	319
85°	73	71	69	64	62	81
90°	2	21	35	44	47	11
95°	113	56	68	77	75	134
105°	529	582	106	125	132	566
115°	1001	1031	1074	268	143	986
125°	1415	1438	1471	1483	1489	1262
135°	1752	1780	1795	1813	1809	1353
145°	2032	2030	2060	2072	2063	1271
155°	2237	2222	2243	2253	2239	1031
165°	2357	2347	2352	2364	2352	666
175°	2411	2399	2403	2415	2398	229
180°	2406	2406	2406	2406	2406	



TEST NUMBER: P915547

CATALOG NUMBER: DFN2DIP-TR4F0-060D090US927-FLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1849.4	1849.4	1849.4	1849.4	1849.4
2.5°	1860.2	1851.3	1831.7	1849.4	1846.0
5°	1849.4	1842.5	1822.8	1837.0	1833.6
7.5°	1837.0	1826.5	1806.8	1821.1	1817.6
10°	1817.6	1805.1	1783.8	1797.9	1792.6
12.5°	1790.8	1780.2	1758.9	1767.8	1764.2
15°	1760.5	1750.0	1726.8	1734.0	1725.1
17.5°	1723.2	1712.7	1689.5	1698.3	1689.5
20°	1682.3	1671.7	1646.8	1652.1	1645.1
22.5°	1641.6	1625.5	1602.3	1602.3	1598.7
25°	1593.4	1579.3	1549.0	1552.4	1549.0
27.5°	1540.0	1527.6	1504.5	1499.3	1490.4
30°	1486.8	1472.4	1445.9	1440.6	1433.4
32.5°	1429.8	1419.3	1390.8	1380.0	1372.8
35°	1374.8	1357.0	1328.5	1317.7	1308.8
37.5°	1312.5	1296.4	1268.0	1255.4	1246.6
40°	1248.5	1234.1	1205.7	1189.9	1182.6
42.5°	1186.2	1171.9	1143.6	1125.7	1115.1
45°	1118.7	1106.2	1079.4	1060.0	1052.8
47.5°	1052.8	1040.4	1011.9	992.3	981.7
50°	983.4	974.5	949.7	924.7	915.8
52.5°	915.8	903.4	880.4	860.8	848.3
55°	846.6	835.8	814.5	793.2	784.3
57.5°	777.2	768.3	745.1	723.8	716.6
60°	707.7	700.8	675.9	656.2	650.9
62.5°	640.2	627.7	610.0	592.2	585.1
65°	570.9	560.2	542.5	526.4	517.5
67.5°	499.8	490.8	474.9	462.5	455.3
70°	434.0	426.8	410.7	398.3	391.3
72.5°	366.4	359.3	350.4	337.9	332.6
75°	298.7	295.3	286.2	275.7	279.2
77.5°	238.3	231.2	227.5	222.3	217.0
80°	177.9	176.0	172.5	167.2	163.6
82.5°	121.0	121.0	119.2	112.1	112.1
85°	72.8	71.1	69.4	63.9	62.3
87.5°	32.1	28.5	24.9	19.6	17.7
90°	1.7	20.9	34.7	43.6	46.9
92.5°	43.6	36.6	41.7	45.3	46.9
95°	113.1	55.6	67.8	76.7	74.9
97.5°	203.7	61.0	88.7	94.0	95.7
100°	308.2	69.7	99.3	113.1	116.6
102.5°	423.0	419.7	102.7	121.8	127.1
105°	529.3	581.6	106.2	125.3	132.3
107.5°	652.9	696.3	109.8	128.8	135.9
110°	771.3	807.8	304.8	130.6	137.5



TEST NUMBER: P915547

CATALOG NUMBER: DFN2DIP-TR4F0-060D090US927-FLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	882.8	914.0	884.5	134.0	139.3
115°	1001.1	1030.6	1074.3	268.2	142.8
117.5°	1103.8	1138.6	1168.3	919.2	463.1
120°	1218.8	1244.8	1276.3	1297.1	1062.1
122.5°	1316.2	1344.1	1379.0	1389.3	1391.2
125°	1415.4	1438.1	1471.2	1483.4	1488.6
127.5°	1505.9	1530.3	1556.6	1574.0	1575.6
130°	1591.3	1619.3	1638.3	1657.5	1655.9
132.5°	1678.4	1701.1	1720.1	1735.9	1734.2
135°	1751.6	1779.5	1795.0	1812.6	1809.1
137.5°	1828.1	1849.0	1866.5	1883.9	1878.7
140°	1902.9	1917.0	1936.0	1951.7	1943.1
142.5°	1965.8	1978.0	2000.5	2014.4	2005.7
145°	2031.9	2030.0	2059.7	2071.9	2063.2
147.5°	2089.2	2084.1	2113.6	2122.3	2115.4
150°	2145.1	2132.9	2160.8	2171.1	2162.4
152.5°	2192.0	2178.1	2204.2	2214.7	2202.5
155°	2237.3	2221.8	2242.6	2253.0	2239.1
157.5°	2273.9	2260.0	2275.7	2287.9	2273.9
160°	2305.2	2294.7	2305.2	2315.6	2303.4
162.5°	2333.0	2322.6	2331.3	2343.5	2327.8
165°	2357.4	2347.0	2352.2	2364.4	2352.2
167.5°	2376.6	2366.1	2371.4	2383.6	2367.9
170°	2392.3	2381.8	2385.3	2397.5	2381.8
172.5°	2402.7	2392.3	2395.8	2408.0	2392.3
175°	2411.3	2399.1	2402.7	2414.8	2397.5
177.5°	2414.8	2402.7	2404.5	2416.7	2401.0
180°	2406.2	2406.2	2406.2	2406.2	2406.2



TEST NUMBER: P915547  
 CATALOG NUMBER: DFN2DIP-TR4F0-060D090US927-FLLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.61	8.38	8.64	9.43	10.84	7.17	7.95	8.21	9.00	10.40
	3H	9.26	9.96	10.31	11.01	12.44	8.79	9.49	9.84	10.54	11.96
	4H	9.84	10.51	10.90	11.56	12.99	9.37	10.03	10.43	11.09	12.52
	6H	10.24	10.85	11.31	11.91	13.35	9.76	10.37	10.83	11.43	12.88
	8H	10.34	10.92	11.42	12.00	13.44	9.87	10.45	10.94	11.52	12.96
	12H	10.39	10.94	11.47	12.01	13.47	9.91	10.46	10.99	11.53	12.99
4H	2H	8.06	8.72	9.12	9.77	11.21	7.71	8.38	8.78	9.43	10.86
	3H	9.92	10.47	10.99	11.55	13.00	9.52	10.08	10.60	11.16	12.60
	4H	10.63	11.13	11.71	12.21	13.67	10.22	10.73	11.30	11.80	13.27
	6H	11.14	11.57	12.23	12.67	14.13	10.73	11.16	11.82	12.26	13.72
	8H	11.29	11.69	12.37	12.78	14.26	10.87	11.28	11.96	12.37	13.85
	12H	11.35	11.72	12.46	12.82	14.31	10.93	11.30	12.04	12.40	13.88
8H	4H	10.82	11.22	11.91	12.31	13.79	10.46	10.86	11.55	11.95	13.43
	6H	11.44	11.78	12.56	12.91	14.39	11.08	11.42	12.19	12.55	14.02
	8H	11.66	11.96	12.78	13.07	14.57	11.30	11.59	12.41	12.70	14.20
	12H	11.79	12.05	12.91	13.16	14.69	11.41	11.67	12.53	12.78	14.31
12H	4H	10.80	11.17	11.91	12.27	13.75	10.45	10.81	11.55	11.92	13.40
	6H	11.47	11.77	12.59	12.88	14.37	11.12	11.42	12.24	12.53	14.02
	8H	11.71	11.97	12.83	13.08	14.61	11.36	11.61	12.48	12.72	14.25