

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918214

Luminaire Tested: DFN2DIP-TR4F0-040D120US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918214
REPORT IS A COMBINATION OF REPORTS P900513 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-040D120US930-FLLFLL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11887.0 lumens
Efficiency: N/A
Efficacy: 96.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 123.3
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918214
CATALOG NUMBER: DFN2DIP-TR4F0-040D120US930-FLLFL

Luminous Intensity Polar Plot

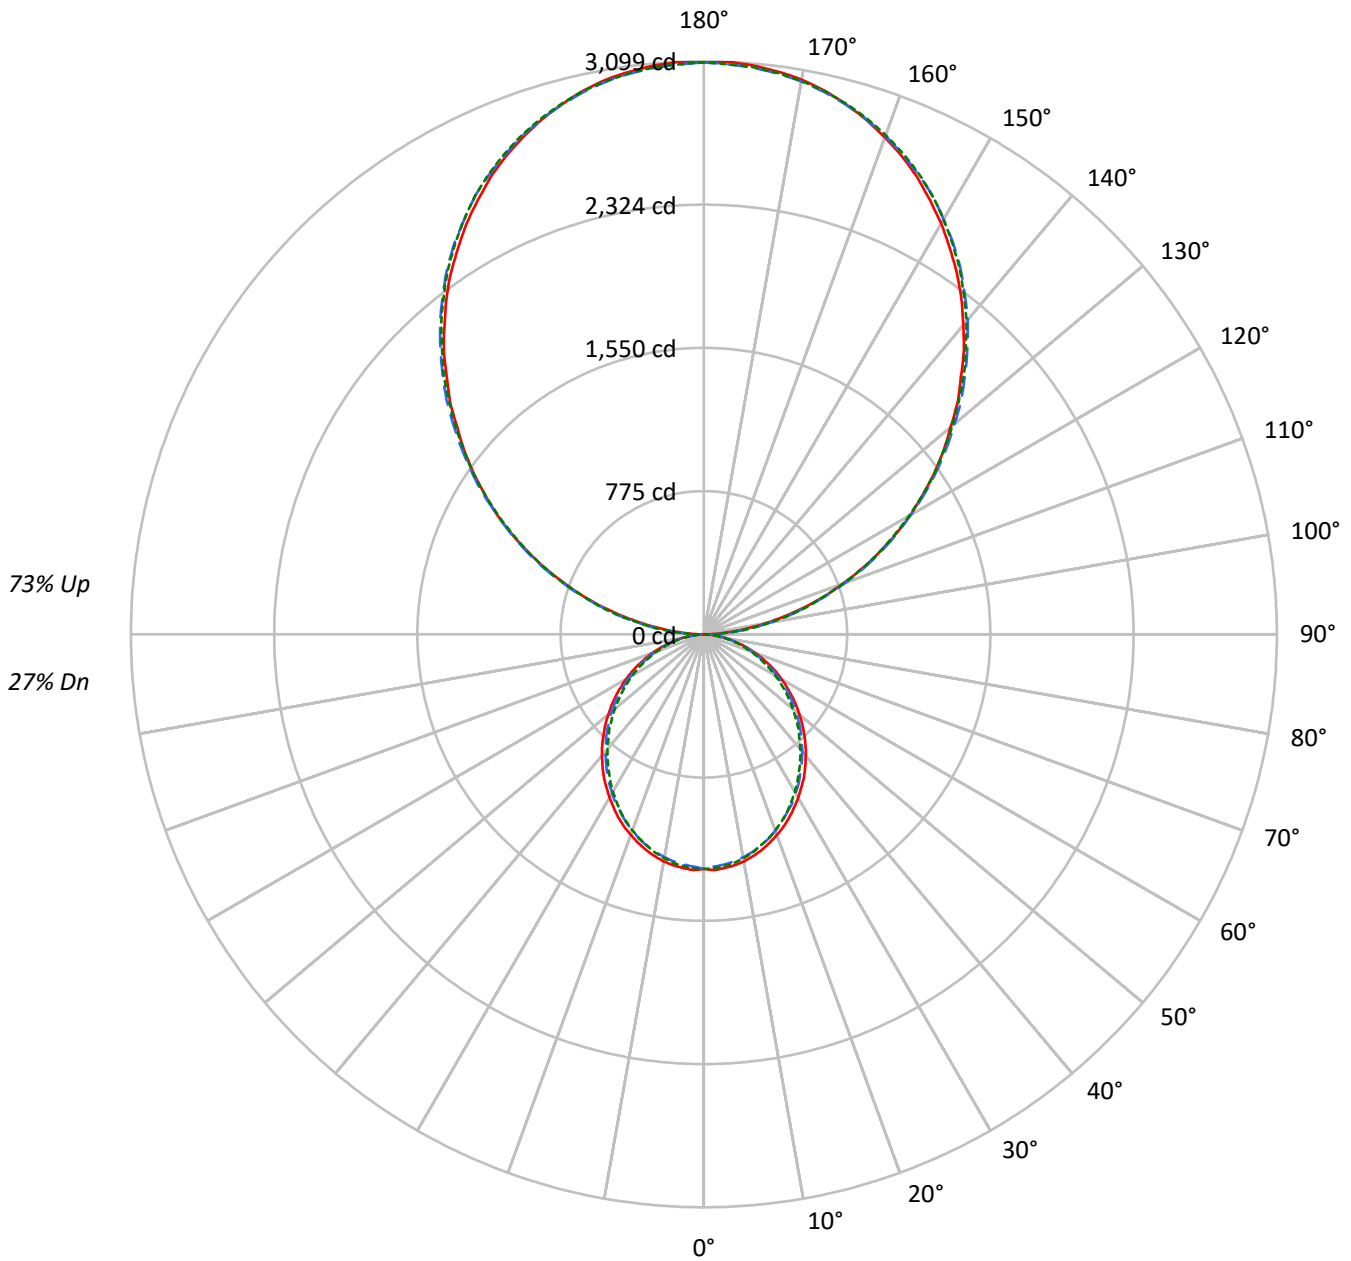

— 0°-180° - - 45°-225° ···· 90°-270°



TEST NUMBER: P918214

CATALOG NUMBER: DFN2DIP-TR4F0-040D120US930-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	91	91	91	91	71	71	71	52	52	52	35	35	35	27				27
1	93	88	85	81	83	79	76	73	62	60	58	46	44	43	31	30	30	23				23
2	84	77	71	66	75	69	64	60	54	51	48	40	38	36	27	26	25	19				19
3	77	68	61	55	68	61	55	50	48	44	40	35	33	30	24	23	21	16				16
4	70	60	52	47	62	54	47	42	42	38	34	32	29	26	22	20	18	14				14
5	64	53	45	40	57	48	41	36	38	33	29	28	25	22	19	17	16	12				12
6	59	48	40	34	53	43	36	31	34	29	25	25	22	20	18	16	14	11				11
7	55	43	35	30	49	39	32	27	31	26	22	23	20	17	16	14	12	9				9
8	51	39	31	26	45	35	28	24	28	23	20	21	18	15	15	13	11	8				8
9	47	35	28	23	42	32	26	21	25	21	17	19	16	14	14	11	10	8				8
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	13	10	9	7				7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1008	1008	1008
5°	1010	994	1001
10°	1002	981	987
15°	987	964	966
20°	967	942	944
25°	947	915	919
30°	922	890	887
35°	899	861	854
40°	870	831	821
45°	841	801	789
50°	809	770	751
55°	777	734	716
60°	739	691	675
65°	699	646	628
70°	647	592	577
75°	575	527	530
80°	489	444	441
85°	354	301	292

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 2411 cd/sqm



TEST NUMBER: P918214

CATALOG NUMBER: DFN2DIP-TR4F0-040D120US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.4	1.0
10°-20°	336.0	2.8
20°-30°	493.8	4.2
30°-40°	573.6	4.8
40°-50°	572.9	4.8
50°-60°	499.5	4.2
60°-70°	369.3	3.1
70°-80°	208.9	1.8
80°-90°	63.9	0.5
90°-100°	191.5	1.6
100°-110°	608.3	5.1
110°-120°	1041.1	8.8
120°-130°	1369.2	11.5
130°-140°	1536.9	12.9
140°-150°	1507.1	12.7
150°-160°	1264.2	10.6
160°-170°	838.4	7.1
170°-180°	293.0	2.5
0°-30°	949.3	8.0
0°-40°	1522.9	12.8
0°-60°	2595.3	21.8
0°-90°	3237.4	27.2
90°-120°	1840.9	15.5
90°-150°	6254.0	52.6
90°-180°	8650.0	72.8
0°-180°	11887.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1269	1269	1269	1269	1269	
5°	1269	1264	1251	1260	1258	120
15°	1208	1201	1185	1190	1184	340
25°	1093	1084	1063	1065	1063	503
35°	943	931	912	904	898	589
45°	768	759	741	727	722	592
55°	581	574	559	544	538	519
65°	392	384	372	361	355	387
75°	205	203	196	189	192	219
85°	50	49	48	44	43	56
90°	3	34	91	86	89	12
95°	136	162	167	167	162	152
105°	562	569	575	579	579	593
115°	1045	1060	1055	1052	1045	1033
125°	1520	1543	1536	1527	1524	1358
135°	1965	1994	2000	1997	1990	1519
145°	2386	2405	2420	2423	2412	1491
155°	2728	2736	2744	2757	2749	1256
165°	2968	2966	2966	2984	2971	837
175°	3089	3081	3076	3094	3078	293
180°	3094	3094	3094	3094	3094	



TEST NUMBER: P918214

CATALOG NUMBER: DFN2DIP-TR4F0-040D120US930-FLLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1268.9	1268.9	1268.9	1268.9	1268.9
2.5°	1276.3	1270.2	1256.8	1268.9	1266.6
5°	1268.9	1264.1	1250.7	1260.4	1258.1
7.5°	1260.4	1253.1	1239.7	1249.5	1247.1
10°	1247.1	1238.5	1223.9	1233.6	1230.0
12.5°	1228.7	1221.4	1206.8	1212.9	1210.4
15°	1207.9	1200.7	1184.8	1189.7	1183.6
17.5°	1182.3	1175.1	1159.2	1165.2	1159.2
20°	1154.2	1147.0	1129.9	1133.5	1128.8
22.5°	1126.3	1115.2	1099.3	1099.3	1096.9
25°	1093.2	1083.5	1062.8	1065.2	1062.8
27.5°	1056.6	1048.1	1032.3	1028.7	1022.6
30°	1020.1	1010.3	992.1	988.4	983.5
32.5°	981.0	973.8	954.2	946.9	941.9
35°	943.2	931.1	911.5	904.2	898.1
37.5°	900.5	889.5	869.9	861.4	855.3
40°	856.6	846.8	827.2	816.4	811.5
42.5°	813.9	804.0	784.6	772.3	765.1
45°	767.5	759.0	740.6	727.3	722.4
47.5°	722.4	713.8	694.3	680.9	673.6
50°	674.7	668.6	651.6	634.5	628.4
52.5°	628.4	619.9	604.1	590.6	582.0
55°	580.9	573.5	558.9	544.2	538.2
57.5°	533.2	527.2	511.2	496.6	491.7
60°	485.6	480.8	463.7	450.3	446.6
62.5°	439.3	430.7	418.6	406.3	401.5
65°	391.8	384.3	372.2	361.2	355.1
67.5°	342.9	336.7	325.9	317.3	312.4
70°	297.7	292.9	281.8	273.3	268.5
72.5°	251.4	246.5	240.4	231.9	228.2
75°	205.0	202.6	196.4	189.1	191.6
77.5°	163.5	158.6	156.1	152.5	148.9
80°	122.1	120.7	118.3	114.7	112.3
82.5°	83.0	83.0	81.9	76.9	76.9
85°	50.0	48.8	47.6	43.9	42.7
87.5°	22.0	19.6	17.1	13.5	12.1
90°	2.8	33.6	91.4	85.9	88.6
92.5°	57.8	78.4	81.1	84.0	84.0
95°	136.2	162.3	167.0	167.0	162.3
97.5°	226.7	250.9	261.2	261.2	261.2
100°	331.2	352.6	360.0	360.0	357.3
102.5°	441.2	457.1	467.3	470.2	467.3
105°	561.6	569.0	574.6	579.3	579.3
107.5°	680.9	692.2	692.2	694.0	680.9
110°	796.6	811.5	811.5	811.5	804.1



TEST NUMBER: P918214

CATALOG NUMBER: DFN2DIP-TR4F0-040D120US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	921.6	937.5	934.7	927.2	921.6
115°	1044.7	1059.7	1055.0	1052.2	1044.7
117.5°	1166.9	1187.5	1174.4	1166.9	1159.5
120°	1290.1	1310.6	1290.1	1290.1	1281.7
122.5°	1402.1	1428.2	1415.1	1407.6	1402.1
125°	1519.6	1542.9	1535.5	1527.1	1524.2
127.5°	1634.3	1663.2	1652.9	1641.8	1634.3
130°	1741.6	1775.1	1770.5	1764.9	1754.6
132.5°	1861.9	1888.1	1889.9	1876.8	1869.4
135°	1965.4	1994.4	2000.0	1997.2	1989.7
137.5°	2081.1	2104.4	2109.1	2107.2	2096.1
140°	2182.8	2206.1	2219.2	2219.2	2208.9
142.5°	2287.3	2310.6	2318.1	2320.8	2310.6
145°	2386.1	2404.8	2419.7	2422.6	2412.3
147.5°	2474.8	2498.1	2509.3	2514.0	2503.7
150°	2566.2	2582.0	2592.3	2600.7	2592.3
152.5°	2647.4	2663.2	2676.3	2686.6	2676.3
155°	2728.5	2736.0	2744.4	2757.4	2749.0
157.5°	2798.5	2804.1	2808.7	2827.4	2814.3
160°	2861.0	2866.6	2869.4	2885.3	2874.0
162.5°	2918.8	2918.8	2921.6	2939.3	2926.3
165°	2968.3	2965.5	2965.5	2984.1	2971.0
167.5°	3013.0	3004.6	3004.6	3023.3	3010.2
170°	3046.6	3039.1	3036.3	3055.0	3039.1
172.5°	3069.9	3062.4	3059.7	3078.3	3062.4
175°	3088.6	3081.1	3075.5	3094.1	3078.3
177.5°	3098.9	3091.4	3085.7	3101.6	3085.7
180°	3094.1	3094.1	3094.1	3094.1	3094.1



TEST NUMBER: P918214
 CATALOG NUMBER: DFN2DIP-TR4F0-040D120US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.68	5.37	5.82	6.49	8.06	4.25	4.94	5.38	6.06	7.63
	3H	6.33	6.95	7.47	8.08	9.66	5.86	6.47	7.00	7.61	9.18
	4H	6.91	7.50	8.06	8.63	10.21	6.44	7.02	7.59	8.15	9.74
	6H	7.30	7.84	8.46	8.97	10.57	6.83	7.36	7.98	8.50	10.09
	8H	7.40	7.91	8.56	9.06	10.65	6.93	7.44	8.08	8.59	10.18
	12H	7.44	7.93	8.61	9.07	10.68	6.96	7.45	8.13	8.59	10.20
4H	2H	5.12	5.71	6.28	6.84	8.43	4.78	5.37	5.94	6.50	8.08
	3H	6.97	7.46	8.14	8.62	10.22	6.58	7.07	7.74	8.23	9.82
	4H	7.68	8.13	8.84	9.28	10.89	7.28	7.73	8.44	8.87	10.49
	6H	8.19	8.57	9.35	9.74	11.34	7.78	8.16	8.95	9.33	10.94
	8H	8.33	8.69	9.50	9.85	11.47	7.92	8.28	9.09	9.44	11.06
	12H	8.40	8.72	9.58	9.89	11.52	7.97	8.30	9.16	9.47	11.10
8H	4H	7.86	8.22	9.03	9.38	11.01	7.50	7.86	8.67	9.02	10.65
	6H	8.49	8.78	9.68	9.99	11.60	8.13	8.42	9.31	9.62	11.24
	8H	8.71	8.97	9.90	10.15	11.78	8.34	8.60	9.53	9.78	11.42
	12H	8.83	9.06	10.03	10.23	11.91	8.45	8.67	9.64	9.85	11.52
12H	4H	7.84	8.17	9.03	9.34	10.97	7.49	7.82	8.67	8.99	10.61
	6H	8.52	8.77	9.71	9.95	11.59	8.16	8.42	9.36	9.60	11.24
	8H	8.75	8.98	9.95	10.15	11.83	8.39	8.62	9.59	9.80	11.47