

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918244

Luminaire Tested: DFN2DIP-TR4F0-050D100US930-RLFL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918244
REPORT IS A COMBINATION OF REPORTS P900480 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-050D100US930-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10680.4 lumens
Efficiency: N/A
Efficacy: 90.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 118.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918244

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US930-RLLFLL

Luminous Intensity Polar Plot

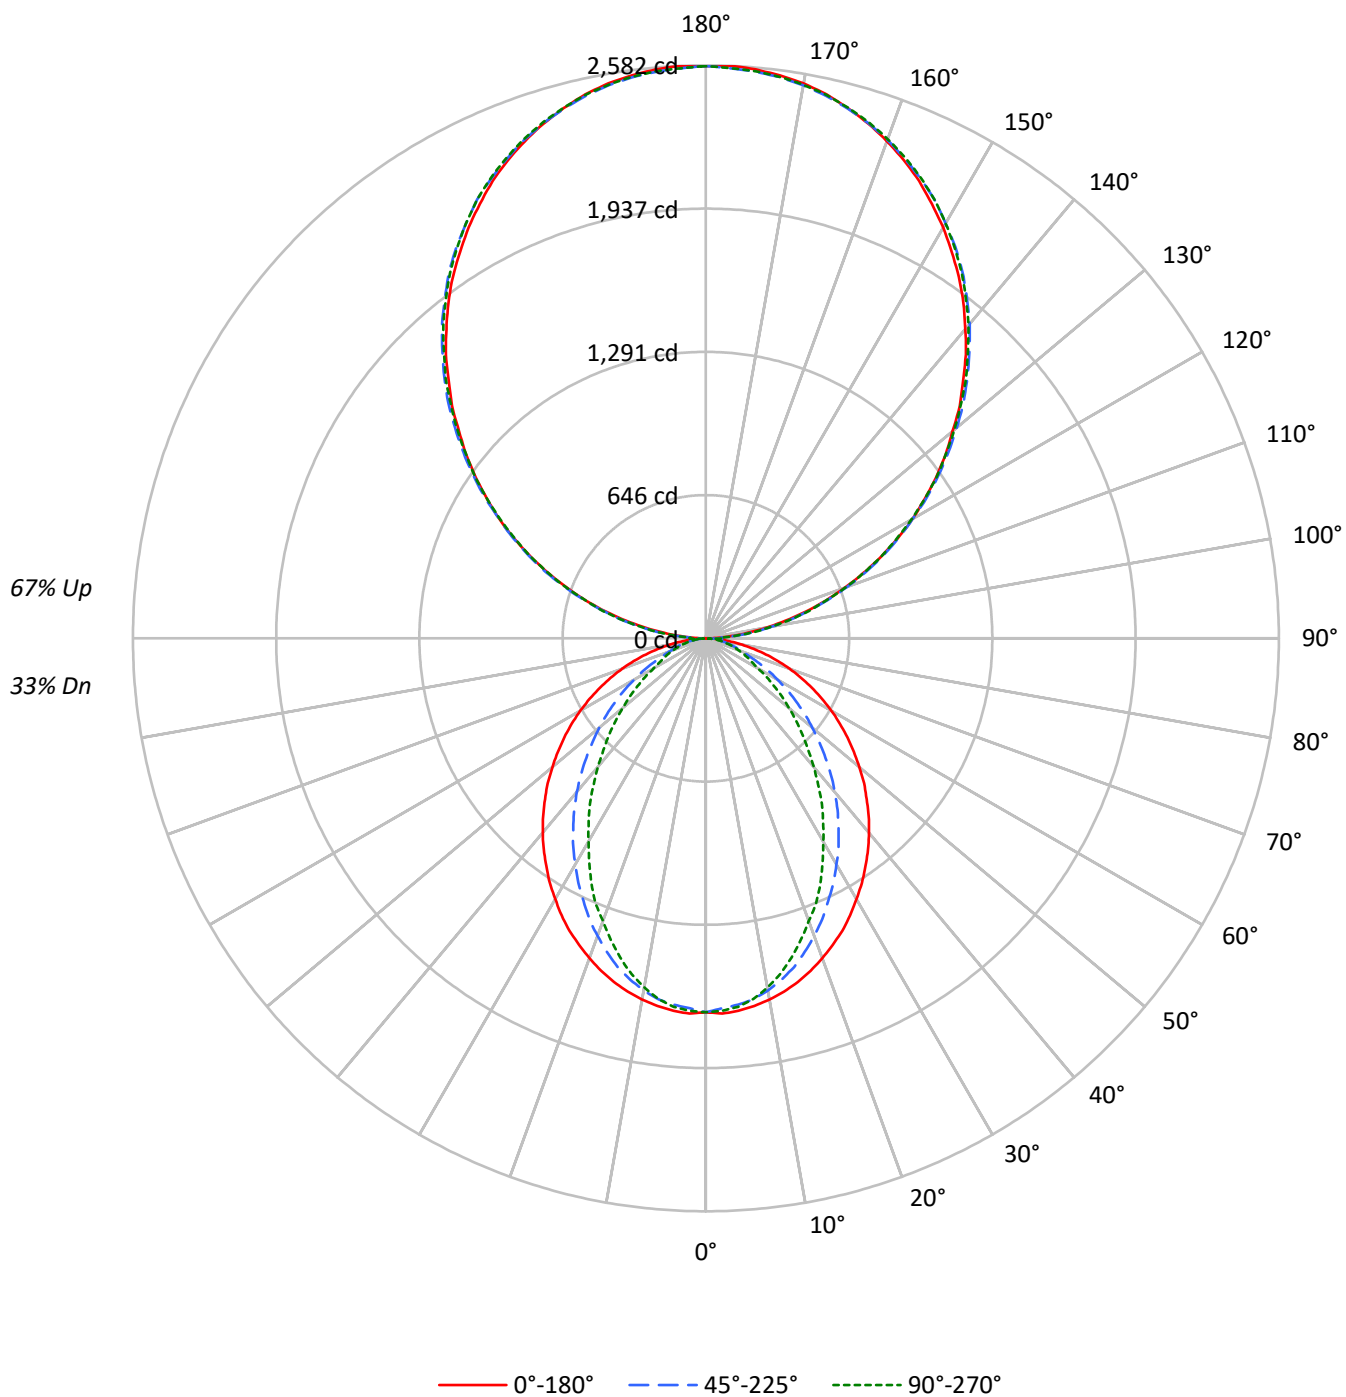

TEST NUMBER: P918244

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1338	1338	1338
5°	1341	1317	1326
10°	1327	1291	1282
15°	1309	1249	1216
20°	1285	1190	1134
25°	1260	1124	1055
30°	1227	1056	955
35°	1194	984	866
40°	1161	908	766
45°	1123	825	674
50°	1083	741	585
55°	1041	651	499
60°	993	556	410
65°	938	461	370
70°	871	371	334
75°	787	327	304
80°	665	274	263
85°	463	183	198

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2011 cd/sqm

TEST NUMBER: P918244

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.9	1.5
10°-20°	433.5	4.1
20°-30°	608.6	5.7
30°-40°	663.4	6.2
40°-50°	609.7	5.7
50°-60°	478.8	4.5
60°-70°	311.7	2.9
70°-80°	160.4	1.5
80°-90°	48.3	0.5
90°-100°	159.6	1.5
100°-110°	507.0	4.7
110°-120°	867.6	8.1
120°-130°	1141.0	10.7
130°-140°	1280.7	12.0
140°-150°	1255.9	11.8
150°-160°	1053.5	9.9
160°-170°	698.7	6.5
170°-180°	244.2	2.3
0°-30°	1200.0	11.2
0°-40°	1863.4	17.4
0°-60°	2951.9	27.6
0°-90°	3472.3	32.5
90°-120°	1534.1	14.4
90°-150°	5211.7	48.8
90°-180°	7208.0	67.5
0°-180°	10680.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1685	1685	1685	1685	1685	
5°	1685	1677	1657	1671	1667	160
15°	1602	1586	1534	1505	1490	452
25°	1455	1406	1305	1243	1220	669
35°	1253	1176	1042	945	912	784
45°	1025	922	762	654	617	791
55°	779	660	496	404	375	696
65°	526	402	265	214	209	521
75°	280	174	122	111	110	297
85°	66	34	29	29	29	75
90°	2	28	76	72	74	11
95°	114	135	139	139	135	126
105°	468	474	479	483	483	494
115°	871	883	879	877	871	861
125°	1266	1286	1280	1272	1270	1132
135°	1638	1662	1667	1664	1658	1266
145°	1988	2004	2016	2019	2010	1242
155°	2274	2280	2287	2298	2291	1047
165°	2474	2471	2471	2487	2476	698
175°	2574	2568	2563	2578	2565	245
180°	2578	2578	2578	2578	2578	

TEST NUMBER: P918244

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1684.8	1684.8	1684.8	1684.8	1684.8
2.5°	1692.4	1684.8	1668.0	1683.3	1680.2
5°	1684.8	1677.2	1657.3	1671.0	1666.6
7.5°	1671.0	1662.0	1640.6	1646.7	1639.0
10°	1652.8	1642.1	1611.7	1607.0	1597.9
12.5°	1629.9	1616.2	1575.0	1565.9	1549.1
15°	1602.5	1585.7	1533.9	1505.0	1489.7
17.5°	1570.4	1546.1	1482.0	1448.5	1424.0
20°	1533.9	1503.3	1427.1	1389.1	1355.4
22.5°	1494.3	1459.1	1370.7	1318.9	1296.1
25°	1454.6	1405.7	1305.1	1242.7	1219.7
27.5°	1407.4	1355.4	1244.1	1172.5	1137.4
30°	1357.1	1299.0	1177.0	1099.3	1058.1
32.5°	1308.2	1238.0	1113.1	1021.6	983.4
35°	1253.4	1175.6	1041.5	945.3	911.7
37.5°	1200.0	1116.1	974.4	869.0	831.0
40°	1143.5	1052.1	904.1	795.9	756.3
42.5°	1085.7	988.1	834.1	721.1	683.1
45°	1024.7	922.4	762.4	654.0	617.4
47.5°	966.7	858.5	693.8	585.5	552.0
50°	902.7	794.4	626.7	521.4	489.5
52.5°	840.1	725.7	562.6	462.0	433.1
55°	779.1	660.1	495.5	404.1	375.1
57.5°	716.6	594.7	436.1	350.7	326.3
60°	652.6	530.6	373.5	295.9	271.4
62.5°	590.1	468.1	320.2	247.0	234.9
65°	526.0	402.5	265.3	213.5	208.9
67.5°	465.0	341.5	213.5	187.5	183.0
70°	401.0	282.1	176.8	161.6	155.5
72.5°	340.1	227.1	147.9	135.7	132.6
75°	280.5	173.7	122.0	111.3	109.8
77.5°	221.1	123.4	96.1	89.9	86.8
80°	166.2	88.5	73.1	67.1	67.1
82.5°	115.9	59.5	50.3	47.2	47.2
85°	65.5	33.5	28.9	28.9	28.9
87.5°	24.5	12.1	12.1	10.7	10.7
90°	2.4	28.0	76.1	71.5	73.9
92.5°	48.2	65.3	67.7	70.0	70.0
95°	113.5	135.3	139.2	139.2	135.3
97.5°	188.9	209.1	217.7	217.7	217.7
100°	276.0	293.8	300.0	300.0	297.7
102.5°	367.7	380.9	389.5	391.8	389.5
105°	468.0	474.2	478.8	482.7	482.7
107.5°	567.4	576.8	576.8	578.4	567.4
110°	663.9	676.3	676.3	676.3	670.1

TEST NUMBER: P918244

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	768.0	781.2	778.9	772.7	768.0
115°	870.7	883.0	879.2	876.9	870.7
117.5°	972.5	989.6	978.7	972.5	966.2
120°	1075.1	1092.2	1075.1	1075.1	1068.1
122.5°	1168.3	1190.1	1179.2	1173.1	1168.3
125°	1266.3	1285.7	1279.5	1272.5	1270.2
127.5°	1362.0	1386.0	1377.4	1368.2	1362.0
130°	1451.3	1479.3	1475.4	1470.7	1462.2
132.5°	1551.6	1573.4	1574.9	1564.1	1557.8
135°	1637.9	1662.0	1666.6	1664.3	1658.1
137.5°	1734.3	1753.7	1757.6	1756.1	1746.7
140°	1819.0	1838.4	1849.3	1849.3	1840.8
142.5°	1906.1	1925.5	1931.7	1934.1	1925.5
145°	1988.4	2004.0	2016.5	2018.8	2010.2
147.5°	2062.3	2081.8	2091.1	2095.0	2086.4
150°	2138.5	2151.7	2160.3	2167.2	2160.3
152.5°	2206.1	2219.3	2230.2	2238.8	2230.2
155°	2273.8	2280.0	2287.0	2297.8	2290.8
157.5°	2332.1	2336.7	2340.6	2356.1	2345.3
160°	2384.2	2388.8	2391.1	2404.3	2395.0
162.5°	2432.4	2432.4	2434.6	2449.4	2438.6
165°	2473.5	2471.2	2471.2	2486.7	2475.9
167.5°	2510.9	2503.9	2503.9	2519.4	2508.5
170°	2538.8	2532.6	2530.3	2545.9	2532.6
172.5°	2558.2	2552.0	2549.7	2565.3	2552.0
175°	2573.8	2567.6	2563.0	2578.5	2565.3
177.5°	2582.4	2576.2	2571.5	2584.7	2571.5
180°	2578.5	2578.5	2578.5	2578.5	2578.5

TEST NUMBER: P918244

CATALOG NUMBER: DFN2DIP-TR4F0-050D100US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.25	6.96	7.35	8.05	9.56	2.23	2.93	3.33	4.03	5.53
	3H	7.92	8.55	9.03	9.65	11.17	3.41	4.04	4.51	5.14	6.66
	4H	8.52	9.12	9.64	10.22	11.75	3.85	4.45	4.97	5.55	7.08
	6H	8.94	9.49	10.06	10.59	12.13	4.17	4.72	5.29	5.82	7.36
	8H	9.06	9.58	10.19	10.71	12.24	4.25	4.78	5.38	5.90	7.43
	12H	9.12	9.62	10.25	10.73	12.28	4.29	4.79	5.43	5.90	7.46
4H	2H	6.26	6.85	7.38	7.96	9.48	2.81	3.40	3.93	4.51	6.03
	3H	8.07	8.57	9.20	9.70	11.24	4.15	4.64	5.28	5.77	7.31
	4H	8.76	9.22	9.90	10.34	11.89	4.69	5.15	5.82	6.27	7.82
	6H	9.27	9.66	10.41	10.80	12.35	5.10	5.49	6.24	6.64	8.19
	8H	9.44	9.81	10.58	10.94	12.51	5.23	5.60	6.37	6.73	8.29
	12H	9.53	9.86	10.69	11.01	12.58	5.29	5.62	6.45	6.77	8.34
8H	4H	8.72	9.08	9.86	10.22	11.78	4.96	5.33	6.10	6.46	8.02
	6H	9.28	9.58	10.44	10.76	12.32	5.48	5.78	6.64	6.95	8.51
	8H	9.50	9.76	10.66	10.91	12.50	5.67	5.93	6.83	7.08	8.67
	12H	9.63	9.86	10.80	11.01	12.63	5.78	6.01	6.95	7.16	8.78
12H	4H	8.67	9.00	9.82	10.14	11.71	4.96	5.29	6.12	6.44	8.01
	6H	9.26	9.52	10.42	10.67	12.26	5.52	5.79	6.69	6.94	8.52
	8H	9.47	9.70	10.64	10.85	12.47	5.73	5.96	6.90	7.11	8.73

END OF REPORT