

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918282

Luminaire Tested: DFN2DIP-TR4F0-060D110US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918282
REPORT IS A COMBINATION OF REPORTS P900499 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-060D110US930-FLLFLL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12779.8 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 138.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918282

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US930-FLLFLL

Luminous Intensity Polar Plot

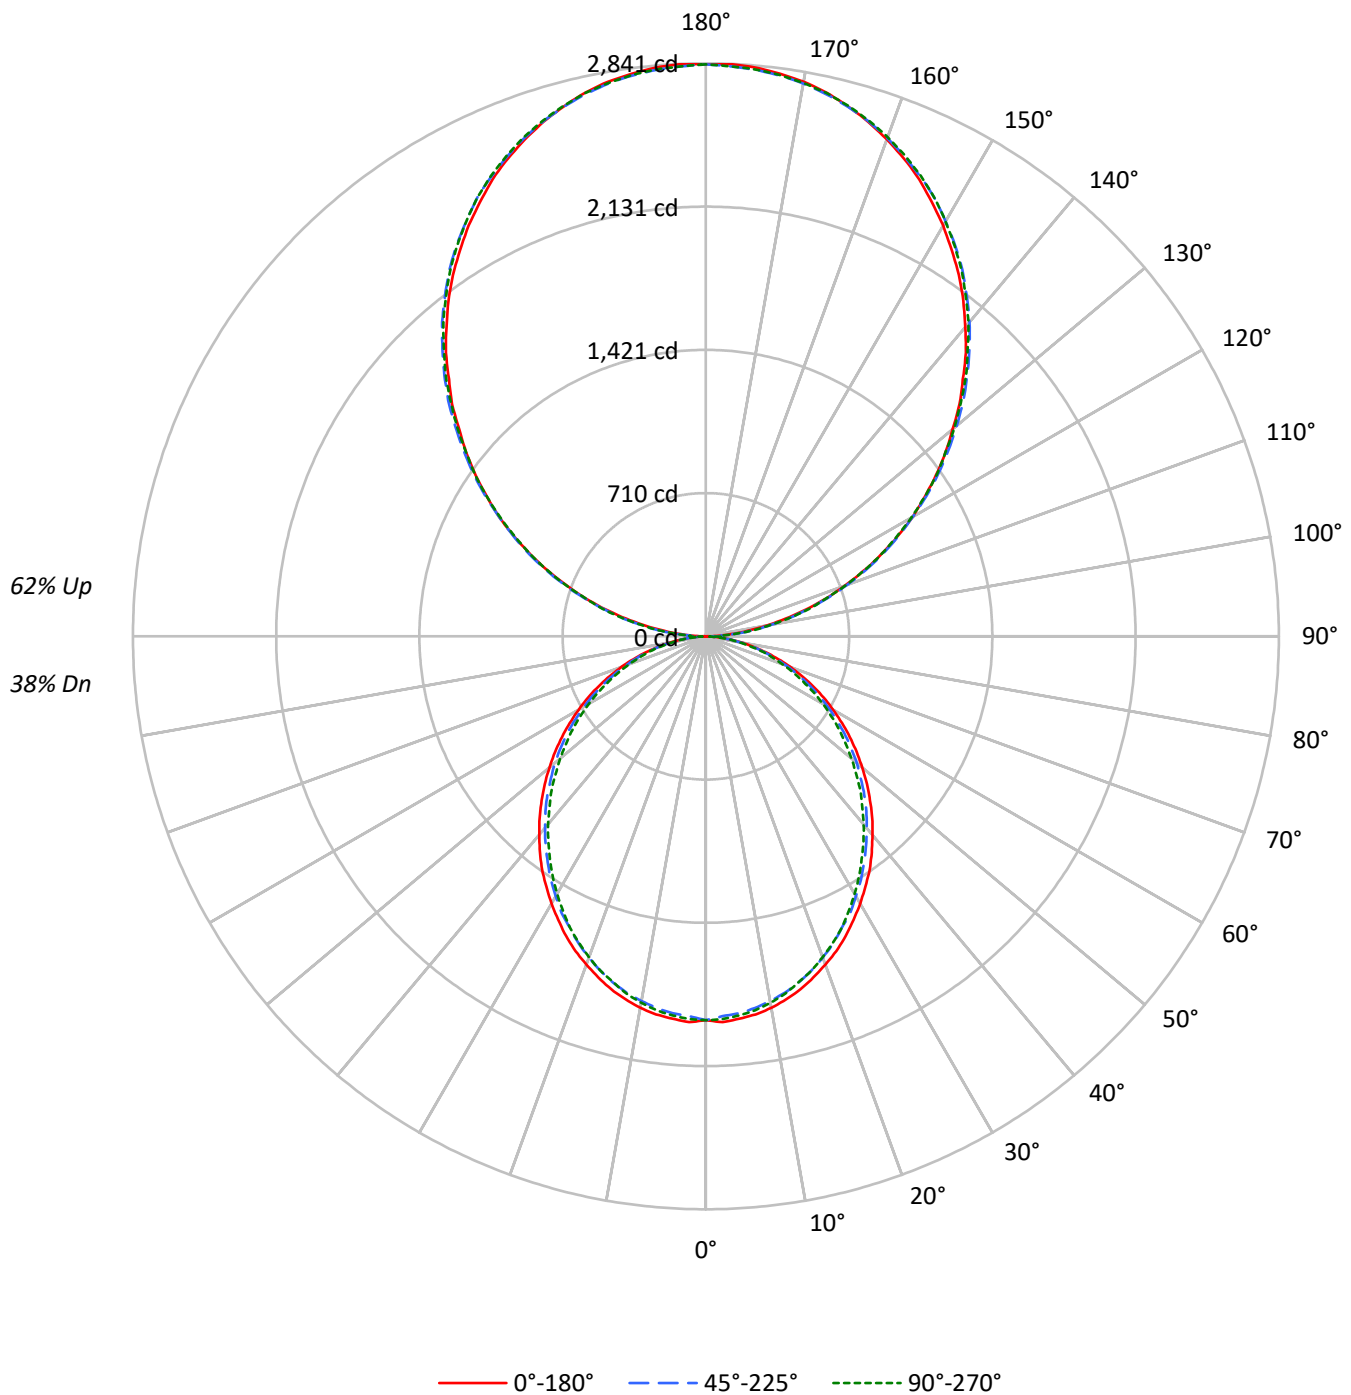

TEST NUMBER: P918282

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US930-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45
1	95	91	87	84	86	83	79	76	67	65	63	53	51	50	40	39	38
2	87	79	73	68	78	72	67	63	59	55	52	46	44	42	35	33	32
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27
4	72	62	54	48	65	56	49	44	46	41	37	37	33	30	28	25	23
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18
7	56	44	36	31	51	41	34	29	33	28	24	27	23	20	21	18	16
8	52	40	32	27	47	37	30	25	30	25	22	25	21	18	19	16	14
9	48	37	29	24	44	34	27	23	28	23	19	23	19	16	17	15	13
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1512	1512	1512
5°	1515	1491	1501
10°	1502	1471	1481
15°	1480	1447	1449
20°	1450	1413	1416
25°	1421	1373	1379
30°	1384	1335	1331
35°	1348	1291	1280
40°	1305	1247	1232
45°	1262	1202	1183
50°	1214	1155	1126
55°	1165	1101	1073
60°	1109	1036	1013
65°	1048	969	942
70°	970	888	866
75°	862	791	796
80°	733	666	661
85°	530	452	438

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2210 cd/sqm

TEST NUMBER: P918282

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.1	1.4
10°-20°	504.1	3.9
20°-30°	740.8	5.8
30°-40°	860.4	6.7
40°-50°	859.3	6.7
50°-60°	749.3	5.9
60°-70°	553.9	4.3
70°-80°	313.4	2.5
80°-90°	90.8	0.7
90°-100°	175.5	1.4
100°-110°	557.7	4.4
110°-120°	954.3	7.5
120°-130°	1255.1	9.8
130°-140°	1408.8	11.0
140°-150°	1381.5	10.8
150°-160°	1158.9	9.1
160°-170°	768.5	6.0
170°-180°	268.6	2.1
0°-30°	1424.0	11.1
0°-40°	2284.3	17.9
0°-60°	3892.9	30.5
0°-90°	4850.9	38.0
90°-120°	1687.5	13.2
90°-150°	5732.8	44.9
90°-180°	7929.0	62.0
0°-180°	12779.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1903	1903	1903	1903	1903	
5°	1903	1896	1876	1891	1887	181
15°	1812	1801	1777	1785	1776	510
25°	1640	1625	1594	1598	1594	755
35°	1415	1397	1367	1356	1347	884
45°	1151	1138	1111	1091	1084	889
55°	871	860	838	816	807	779
65°	588	577	558	542	533	581
75°	307	304	295	284	287	328
85°	75	73	71	66	64	84
90°	2	31	84	79	81	12
95°	125	149	153	153	149	139
105°	515	522	527	531	531	543
115°	958	971	967	965	958	947
125°	1393	1414	1407	1400	1397	1245
135°	1802	1828	1833	1831	1824	1393
145°	2187	2204	2218	2221	2211	1367
155°	2501	2508	2516	2528	2520	1151
165°	2721	2718	2718	2735	2723	768
175°	2831	2824	2819	2836	2822	269
180°	2836	2836	2836	2836	2836	

TEST NUMBER: P918282

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US930-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1903.4	1903.4	1903.4	1903.4	1903.4
2.5°	1914.5	1905.4	1885.1	1903.4	1899.9
5°	1903.4	1896.2	1876.0	1890.6	1887.1
7.5°	1890.6	1879.8	1859.5	1874.3	1870.6
10°	1870.6	1857.8	1835.8	1850.4	1844.9
12.5°	1843.1	1832.1	1810.2	1819.3	1815.7
15°	1811.9	1801.1	1777.2	1784.6	1775.5
17.5°	1773.5	1762.7	1738.8	1747.8	1738.8
20°	1731.4	1720.5	1694.8	1700.3	1693.1
22.5°	1689.5	1672.9	1649.0	1649.0	1645.4
25°	1639.9	1625.4	1594.2	1597.7	1594.2
27.5°	1584.9	1572.1	1548.4	1543.0	1533.9
30°	1530.2	1515.4	1488.1	1482.6	1475.2
32.5°	1471.5	1460.7	1431.3	1420.2	1412.9
35°	1414.9	1396.6	1367.3	1356.2	1347.0
37.5°	1350.8	1334.2	1305.0	1292.1	1283.0
40°	1284.9	1270.2	1240.9	1224.6	1217.2
42.5°	1220.8	1206.1	1177.0	1158.5	1147.6
45°	1151.4	1138.5	1110.9	1091.0	1083.5
47.5°	1083.5	1070.7	1041.5	1021.2	1010.3
50°	1012.1	1003.0	977.4	951.7	942.6
52.5°	942.6	929.8	906.0	885.9	873.1
55°	871.3	860.2	838.3	816.4	807.2
57.5°	799.9	790.8	766.9	744.9	737.5
60°	728.4	721.2	695.6	675.4	669.9
62.5°	658.8	646.0	627.8	609.5	602.2
65°	587.6	576.6	558.3	541.8	532.6
67.5°	514.4	505.1	488.8	476.0	468.6
70°	446.6	439.3	422.7	409.9	402.8
72.5°	377.1	369.7	360.6	347.8	342.3
75°	307.4	303.9	294.6	283.7	287.4
77.5°	245.2	237.9	234.2	228.8	223.3
80°	183.1	181.2	177.5	172.0	168.4
82.5°	124.5	124.5	122.7	115.4	115.4
85°	74.9	73.2	71.4	65.8	64.1
87.5°	33.0	29.4	25.6	20.2	18.3
90°	2.5	30.8	83.8	78.7	81.2
92.5°	53.0	71.8	74.4	77.0	77.0
95°	124.8	148.8	153.0	153.0	148.8
97.5°	207.8	230.0	239.5	239.5	239.5
100°	303.5	323.2	330.0	330.0	327.5
102.5°	404.5	419.0	428.4	431.0	428.4
105°	514.8	521.6	526.8	531.0	531.0
107.5°	624.2	634.5	634.5	636.2	624.2
110°	730.3	744.0	744.0	744.0	737.1

TEST NUMBER: P918282

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	844.8	859.3	856.8	849.9	844.8
115°	957.7	971.3	967.1	964.6	957.7
117.5°	1069.8	1088.5	1076.5	1069.8	1062.9
120°	1182.6	1201.4	1182.6	1182.6	1174.9
122.5°	1285.2	1309.1	1297.1	1290.3	1285.2
125°	1392.9	1414.3	1407.4	1399.8	1397.2
127.5°	1498.1	1524.6	1515.2	1505.0	1498.1
130°	1596.4	1627.3	1622.9	1617.8	1608.4
132.5°	1706.7	1730.7	1732.4	1720.4	1713.6
135°	1801.6	1828.1	1833.3	1830.8	1823.9
137.5°	1907.7	1929.1	1933.3	1931.6	1921.4
140°	2000.9	2022.3	2034.3	2034.3	2024.9
142.5°	2096.7	2118.1	2124.9	2127.4	2118.1
145°	2187.3	2204.4	2218.1	2220.6	2211.3
147.5°	2268.6	2289.9	2300.2	2304.4	2295.1
150°	2352.4	2366.9	2376.3	2384.0	2376.3
152.5°	2426.7	2441.2	2453.2	2462.7	2453.2
155°	2501.2	2507.9	2515.7	2527.7	2519.9
157.5°	2565.3	2570.4	2574.6	2591.8	2579.8
160°	2622.6	2627.7	2630.2	2644.8	2634.6
162.5°	2675.6	2675.6	2678.2	2694.4	2682.4
165°	2720.9	2718.3	2718.3	2735.4	2723.4
167.5°	2761.9	2754.2	2754.2	2771.4	2759.4
170°	2792.7	2785.9	2783.3	2800.4	2785.9
172.5°	2814.1	2807.2	2804.7	2821.8	2807.2
175°	2831.2	2824.4	2819.2	2836.3	2821.8
177.5°	2840.6	2833.7	2828.6	2843.2	2828.6
180°	2836.3	2836.3	2836.3	2836.3	2836.3

TEST NUMBER: P918282

CATALOG NUMBER: DFN2DIP-TR4F0-060D110US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.47	8.24	8.53	9.29	10.73	7.04	7.80	8.10	8.86	10.30
	3H	9.13	9.81	10.19	10.88	12.33	8.65	9.34	9.72	10.40	11.86
	4H	9.71	10.36	10.78	11.43	12.88	9.24	9.88	10.31	10.95	12.41
	6H	10.10	10.70	11.19	11.77	13.24	9.63	10.22	10.71	11.30	12.77
	8H	10.21	10.77	11.29	11.86	13.33	9.73	10.30	10.82	11.39	12.85
	12H	10.25	10.79	11.34	11.87	13.36	9.77	10.31	10.86	11.39	12.88
4H	2H	7.92	8.57	9.01	9.64	11.10	7.58	8.23	8.66	9.30	10.75
	3H	9.78	10.32	10.87	11.42	12.89	9.39	9.93	10.48	11.02	12.50
	4H	10.49	10.99	11.58	12.07	13.57	10.08	10.58	11.18	11.67	13.16
	6H	11.00	11.43	12.10	12.53	14.02	10.59	11.02	11.69	12.13	13.61
	8H	11.15	11.54	12.25	12.65	14.15	10.73	11.13	11.84	12.23	13.74
	12H	11.21	11.57	12.33	12.69	14.20	10.79	11.15	11.91	12.27	13.77
8H	4H	10.68	11.08	11.78	12.18	13.68	10.32	10.72	11.42	11.82	13.32
	6H	11.31	11.63	12.43	12.78	14.28	10.94	11.27	12.07	12.42	13.91
	8H	11.53	11.81	12.66	12.94	14.46	11.16	11.44	12.29	12.57	14.09
	12H	11.65	11.91	12.79	13.03	14.58	11.27	11.52	12.40	12.64	14.20
12H	4H	10.66	11.02	11.78	12.13	13.64	10.31	10.67	11.43	11.78	13.29
	6H	11.33	11.62	12.47	12.75	14.27	10.98	11.27	12.11	12.40	13.91
	8H	11.57	11.83	12.71	12.95	14.50	11.21	11.47	12.35	12.59	14.14