

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918361

Luminaire Tested: DFN2DIP-TR4F0-080D120US930-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918361
REPORT IS A COMBINATION OF REPORTS P902042 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-080D120US930-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 15229.7 lumens
Efficiency: N/A
Efficacy: 91.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 166.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918361
CATALOG NUMBER: DFN2DIP-TR4F0-080D120US930-RLLONL

Luminous Intensity Polar Plot

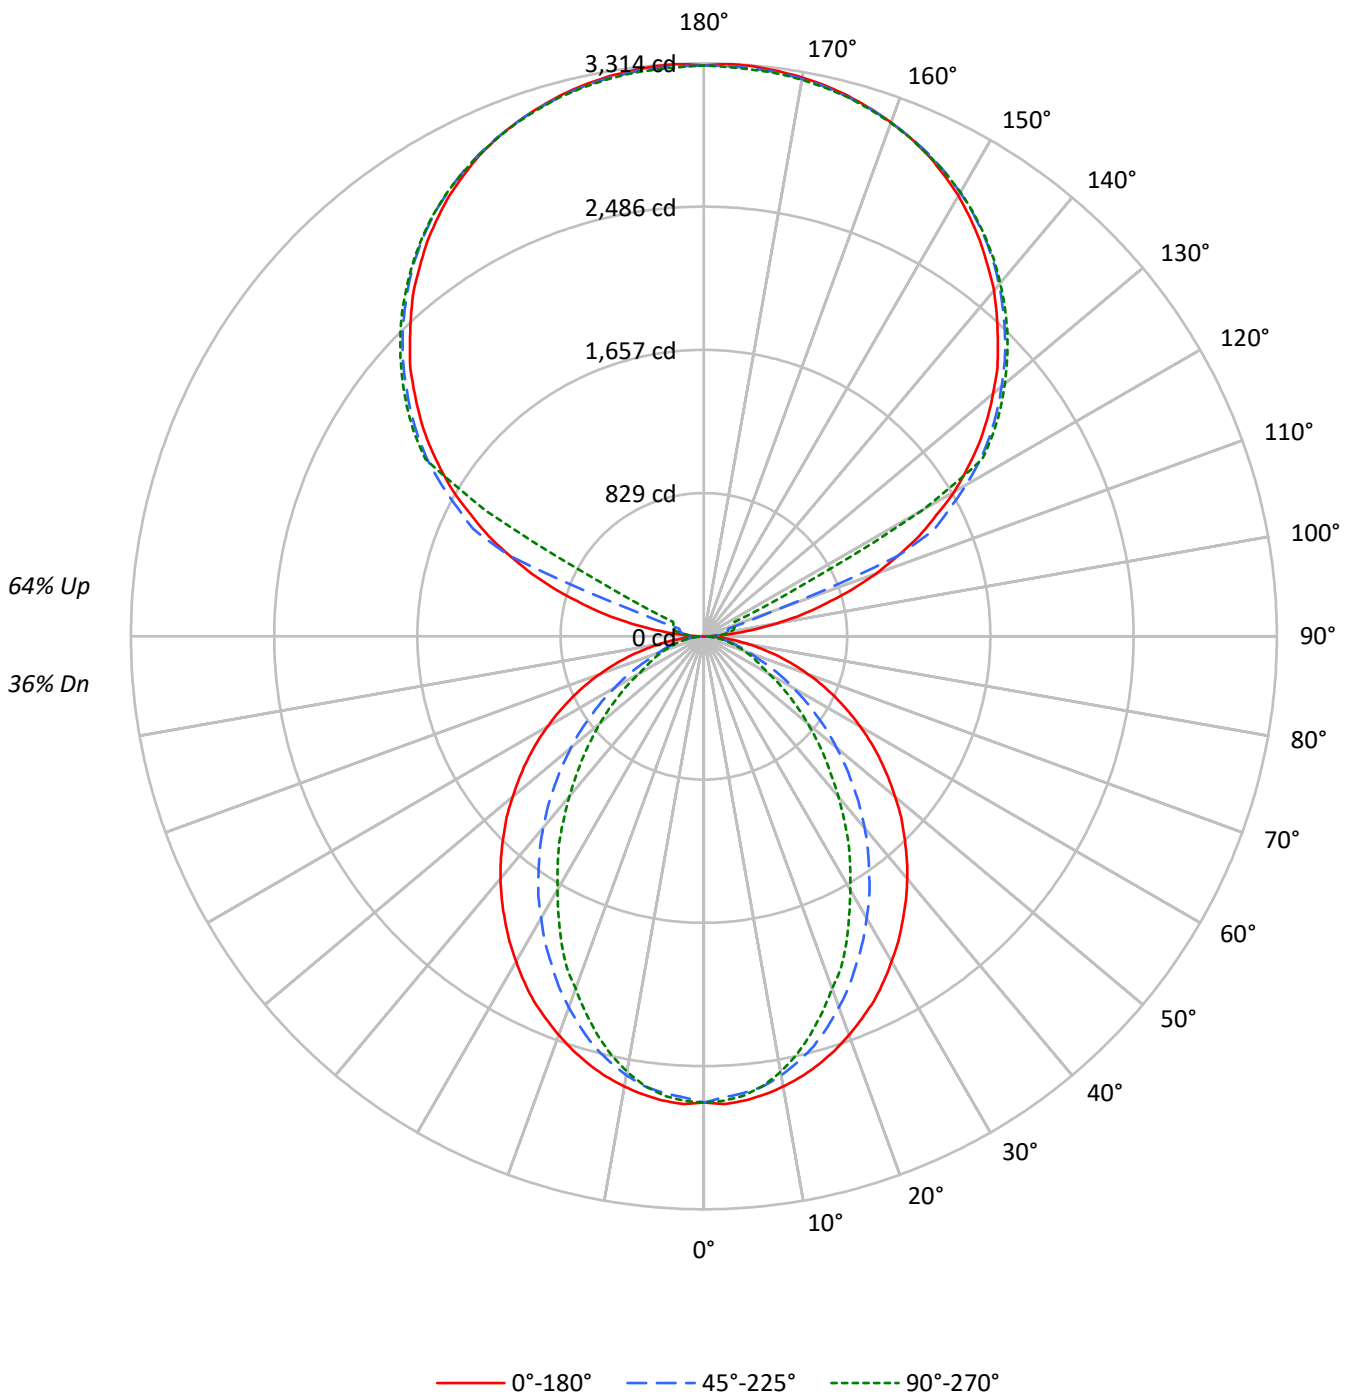



TEST NUMBER: P918361

CATALOG NUMBER: DFN2DIP-TR4F0-080D120US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	36				36
1	95	91	87	84	86	83	80	77	67	65	63	52	51	50	39	38	38	31				31
2	87	80	74	69	78	73	68	63	59	56	53	46	44	42	35	33	32	27				27
3	79	70	63	58	72	64	58	53	52	48	45	41	38	36	31	29	28	23				23
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24	20				20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	25	23	21	18				18
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19	16				16
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17	14				14
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15	13				13
9	49	37	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14	12				12
10	46	34	27	23	42	32	25	21	26	22	18	22	18	15	17	14	13	11				11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2142	2142	2142
5°	2145	2108	2121
10°	2124	2066	2052
15°	2095	1998	1945
20°	2056	1904	1814
25°	2016	1798	1688
30°	1963	1690	1527
35°	1911	1574	1386
40°	1858	1453	1225
45°	1796	1320	1079
50°	1733	1185	935
55°	1666	1041	798
60°	1589	890	657
65°	1501	737	591
70°	1393	594	535
75°	1259	524	487
80°	1064	439	422
85°	741	293	316

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1796 cd/sqm



TEST NUMBER: P918361

CATALOG NUMBER: DFN2DIP-TR4F0-080D120US930-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	252.6	1.7
10°-20°	693.6	4.6
20°-30°	973.7	6.4
30°-40°	1061.4	7.0
40°-50°	975.6	6.4
50°-60°	766.2	5.0
60°-70°	498.7	3.3
70°-80°	256.7	1.7
80°-90°	71.3	0.5
90°-100°	108.9	0.7
100°-110°	405.9	2.7
110°-120°	1076.4	7.1
120°-130°	1785.3	11.7
130°-140°	1896.5	12.5
140°-150°	1762.5	11.6
150°-160°	1417.0	9.3
160°-170°	913.1	6.0
170°-180°	314.3	2.1
0°-30°	1919.9	12.6
0°-40°	2981.4	19.6
0°-60°	4723.1	31.0
0°-90°	5549.8	36.4
90°-120°	1591.2	10.4
90°-150°	7035.5	46.2
90°-180°	9680.0	63.6
0°-180°	15229.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2696	2696	2696	2696	2696	
5°	2696	2684	2652	2674	2666	256
15°	2564	2537	2454	2408	2384	722
25°	2327	2249	2088	1988	1952	1070
35°	2005	1881	1666	1513	1459	1255
45°	1639	1476	1220	1046	988	1266
55°	1246	1056	793	646	600	1114
65°	842	644	424	342	334	834
75°	449	278	195	178	176	475
85°	105	54	46	46	46	120
90°	2	29	48	60	64	14
95°	155	76	93	105	103	184
105°	726	798	146	172	182	776
115°	1374	1414	1474	368	196	1352
125°	1942	1974	2019	2036	2043	1732
135°	2404	2442	2463	2487	2482	1857
145°	2788	2786	2826	2843	2831	1744
155°	3070	3049	3077	3092	3073	1415
165°	3235	3221	3228	3245	3228	914
175°	3309	3292	3297	3314	3290	315
180°	3302	3302	3302	3302	3302	



TEST NUMBER: P918361

CATALOG NUMBER: DFN2DIP-TR4F0-080D120US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2695.7	2695.7	2695.7	2695.7	2695.7
2.5°	2707.9	2695.7	2668.8	2693.3	2688.4
5°	2695.7	2683.6	2651.7	2673.7	2666.4
7.5°	2673.7	2659.2	2625.0	2634.6	2622.4
10°	2644.4	2627.4	2578.7	2571.2	2556.7
12.5°	2608.0	2586.0	2519.9	2505.4	2478.5
15°	2563.9	2537.0	2454.2	2407.9	2383.5
17.5°	2512.7	2473.6	2371.1	2317.6	2278.4
20°	2454.2	2405.3	2283.4	2222.6	2168.7
22.5°	2390.8	2334.6	2193.1	2110.2	2073.7
25°	2327.4	2249.2	2088.2	1988.3	1951.6
27.5°	2251.8	2168.7	1990.6	1876.0	1819.8
30°	2171.3	2078.4	1883.3	1759.0	1693.0
32.5°	2093.1	1980.8	1781.0	1634.5	1573.4
35°	2005.4	1880.9	1666.3	1512.6	1458.7
37.5°	1919.9	1785.7	1558.9	1390.4	1329.6
40°	1829.7	1683.4	1446.6	1273.4	1210.0
42.5°	1737.0	1580.9	1334.5	1153.9	1093.0
45°	1639.4	1475.9	1219.8	1046.4	988.0
47.5°	1546.8	1373.6	1110.1	936.7	883.1
50°	1444.2	1271.1	1002.7	834.2	783.2
52.5°	1344.1	1161.1	900.2	739.2	692.9
55°	1246.5	1056.3	792.8	646.5	600.2
57.5°	1146.6	951.5	697.8	561.2	522.0
60°	1044.1	849.0	597.6	473.4	434.3
62.5°	944.2	749.0	512.3	395.3	375.9
65°	841.7	643.9	424.4	341.7	334.1
67.5°	744.1	546.4	341.7	299.9	292.8
70°	641.6	451.4	282.9	258.5	248.7
72.5°	544.0	363.4	236.6	217.2	212.2
75°	448.8	278.0	195.2	178.1	175.8
77.5°	353.8	197.5	153.8	143.9	139.0
80°	265.8	141.6	117.0	107.4	107.4
82.5°	185.3	95.2	80.5	75.6	75.6
85°	104.8	53.6	46.3	46.3	46.3
87.5°	39.1	19.4	19.4	17.1	17.1
90°	2.3	28.6	47.7	59.8	64.4
92.5°	59.8	50.2	57.3	62.1	64.4
95°	155.2	76.3	93.0	105.3	102.7
97.5°	279.5	83.7	121.7	129.1	131.3
100°	423.0	95.6	136.2	155.2	160.0
102.5°	580.5	575.9	141.0	167.1	174.5
105°	726.3	798.1	145.9	171.9	181.6
107.5°	895.9	955.5	150.7	176.8	186.4
110°	1058.5	1108.5	418.2	179.3	188.7



TEST NUMBER: P918361

CATALOG NUMBER: DFN2DIP-TR4F0-080D120US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1211.5	1254.3	1213.7	183.8	191.2
115°	1373.7	1414.3	1474.1	367.9	196.1
117.5°	1514.7	1562.4	1603.3	1261.3	635.5
120°	1672.5	1708.2	1751.3	1780.0	1457.4
122.5°	1806.1	1844.4	1892.4	1906.6	1909.1
125°	1942.3	1973.5	2018.9	2035.6	2042.7
127.5°	2066.5	2100.0	2136.1	2159.9	2162.2
130°	2183.7	2222.0	2248.1	2274.5	2272.2
132.5°	2303.1	2334.4	2360.5	2382.1	2379.8
135°	2403.6	2441.9	2463.2	2487.3	2482.5
137.5°	2508.6	2537.2	2561.3	2585.1	2578.1
140°	2611.3	2630.6	2656.6	2678.3	2666.4
142.5°	2697.5	2714.3	2745.2	2764.2	2752.3
145°	2788.3	2785.8	2826.3	2843.1	2831.1
147.5°	2866.9	2859.8	2900.4	2912.3	2903.0
150°	2943.5	2926.8	2965.1	2979.3	2967.4
152.5°	3007.9	2988.9	3024.7	3039.1	3022.4
155°	3070.0	3048.7	3077.4	3091.6	3072.6
157.5°	3120.2	3101.2	3122.8	3139.6	3120.2
160°	3163.4	3148.9	3163.4	3177.5	3160.8
162.5°	3201.4	3187.2	3199.1	3215.9	3194.3
165°	3234.9	3220.7	3227.8	3244.6	3227.8
167.5°	3261.3	3246.8	3254.2	3270.9	3249.4
170°	3282.8	3268.4	3273.2	3289.9	3268.4
172.5°	3297.0	3282.8	3287.7	3304.4	3282.8
175°	3308.9	3292.2	3297.0	3313.8	3289.9
177.5°	3313.8	3297.0	3299.6	3316.3	3294.8
180°	3301.9	3301.9	3301.9	3301.9	3301.9



TEST NUMBER: P918361
 CATALOG NUMBER: DFN2DIP-TR4F0-080D120US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.37	9.10	9.44	10.17	11.63	4.35	5.08	5.42	6.15	7.60
	3H	10.04	10.70	11.12	11.77	13.25	5.53	6.18	6.61	7.26	8.73
	4H	10.65	11.27	11.74	12.34	13.82	5.97	6.59	7.07	7.67	9.15
	6H	11.06	11.63	12.16	12.71	14.21	6.29	6.86	7.39	7.94	9.43
	8H	11.19	11.73	12.29	12.83	14.31	6.38	6.92	7.48	8.02	9.50
	12H	11.24	11.76	12.35	12.85	14.36	6.42	6.93	7.53	8.03	9.53
4H	2H	8.38	9.00	9.48	10.08	11.56	4.93	5.55	6.03	6.63	8.11
	3H	10.20	10.71	11.30	11.82	13.31	6.27	6.79	7.38	7.89	9.38
	4H	10.89	11.36	12.00	12.46	13.97	6.82	7.29	7.93	8.38	9.90
	6H	11.40	11.80	12.51	12.92	14.43	7.23	7.64	8.35	8.75	10.26
	8H	11.57	11.95	12.69	13.06	14.58	7.36	7.74	8.47	8.85	10.37
	12H	11.66	12.00	12.79	13.13	14.65	7.42	7.76	8.55	8.88	10.41
8H	4H	10.85	11.23	11.96	12.34	13.86	7.09	7.47	8.21	8.58	10.10
	6H	11.41	11.72	12.55	12.87	14.39	7.60	7.92	8.74	9.07	10.59
	8H	11.63	11.90	12.77	13.03	14.57	7.80	8.07	8.94	9.20	10.74
	12H	11.76	12.00	12.91	13.13	14.70	7.91	8.15	9.06	9.28	10.86
12H	4H	10.79	11.14	11.93	12.26	13.79	7.09	7.43	8.22	8.55	10.08
	6H	11.39	11.66	12.53	12.79	14.33	7.65	7.93	8.80	9.06	10.60
	8H	11.60	11.84	12.75	12.97	14.54	7.86	8.10	9.01	9.23	10.80