

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918437

Luminaire Tested: DFN2DIP-TR4F0-110D040US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918437
REPORT IS A COMBINATION OF REPORTS P901904 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-110D040US930-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10851.6 lumens
Efficiency: N/A
Efficacy: 75.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 143
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918437

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US930-RLLONL

Luminous Intensity Polar Plot

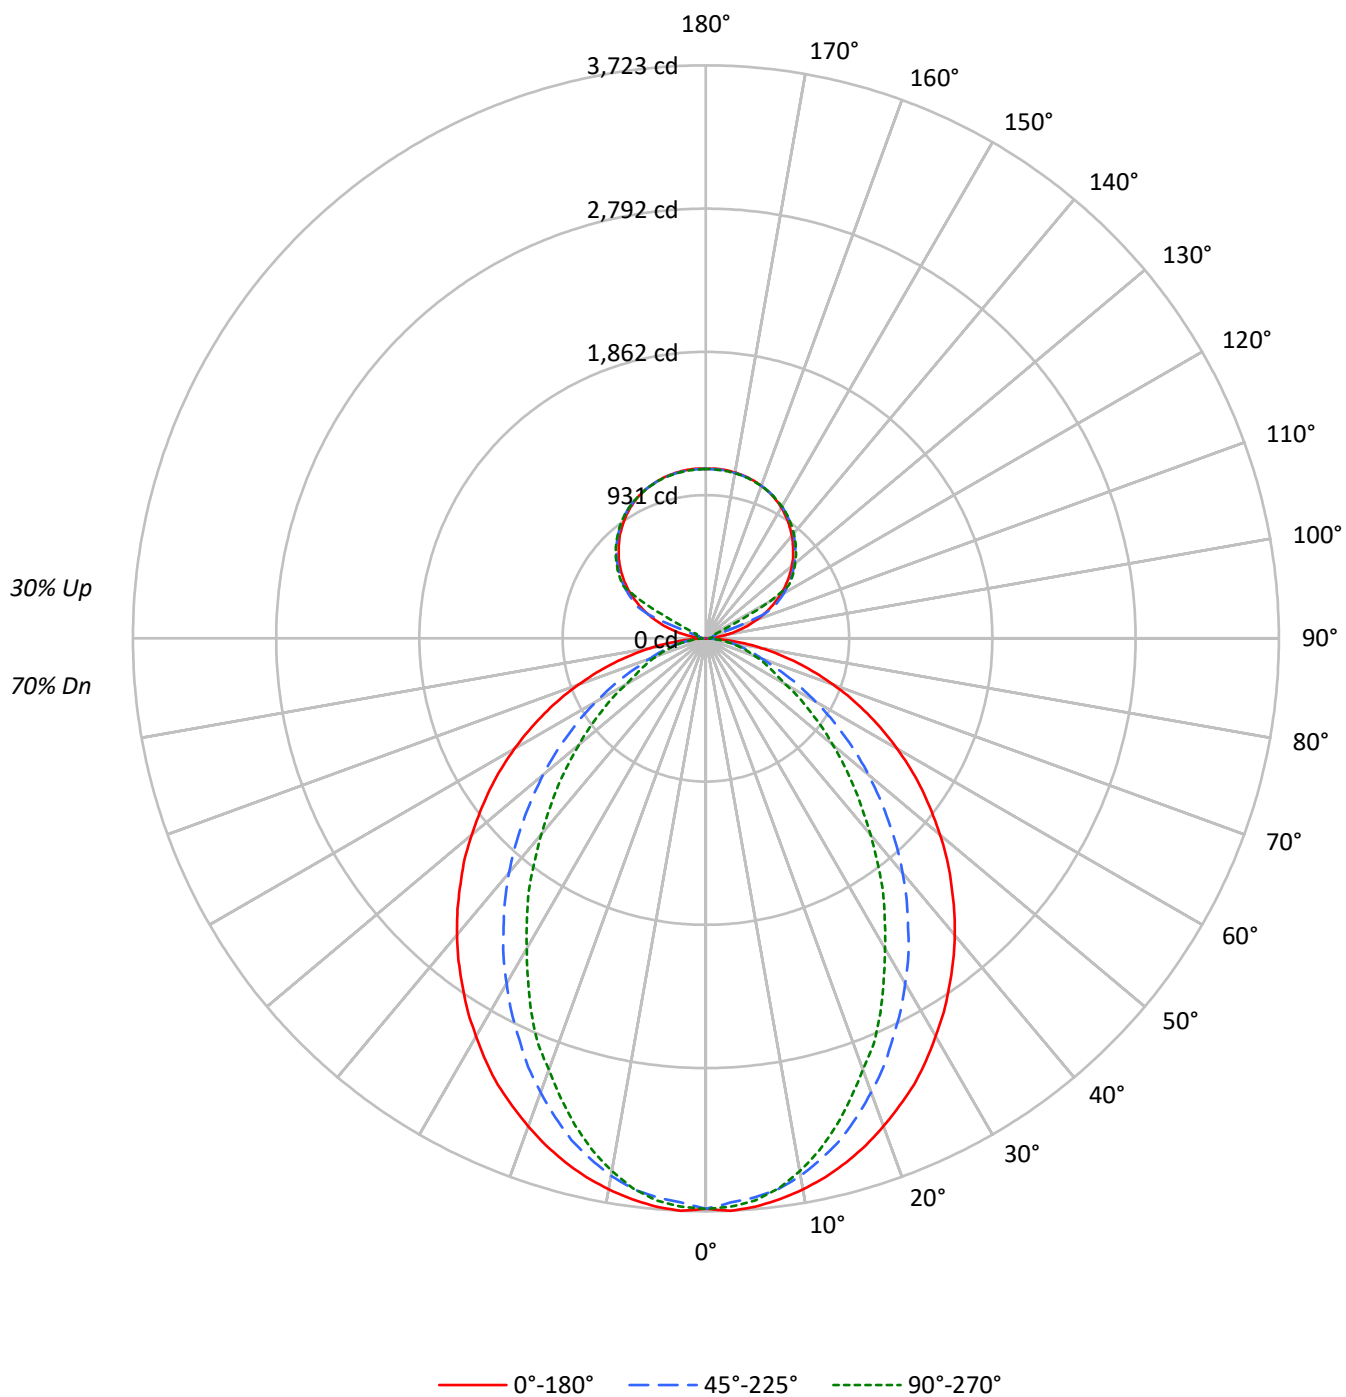

TEST NUMBER: P918437

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	106	106	106	106	95	95	95	84	84	84	75	75	75
1	103	99	95	92	97	94	90	87	84	82	79	75	73	72	67	66	64
2	94	87	81	76	89	83	77	73	75	70	67	67	64	61	60	58	55
3	87	77	70	64	82	73	67	62	66	61	57	60	56	52	54	51	48
4	80	69	61	55	75	66	59	53	60	54	49	54	49	46	48	45	42
5	73	62	54	48	69	59	52	46	54	48	43	49	44	40	44	40	37
6	68	56	48	42	64	53	46	41	49	43	38	44	39	35	40	36	33
7	63	51	43	37	60	49	41	36	44	38	34	41	36	32	37	33	30
8	59	46	39	33	56	45	37	32	41	35	30	37	32	29	34	30	27
9	55	43	35	30	52	41	34	29	38	32	28	35	30	26	32	27	24
10	52	39	32	27	49	38	31	27	35	29	25	32	27	24	29	25	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2945	2945	2945
5°	2949	2898	2916
10°	2920	2841	2821
15°	2880	2747	2675
20°	2827	2618	2495
25°	2772	2472	2321
30°	2699	2324	2100
35°	2628	2164	1906
40°	2555	1998	1684
45°	2470	1815	1483
50°	2382	1629	1286
55°	2291	1431	1097
60°	2185	1224	903
65°	2064	1014	813
70°	1916	817	735
75°	1731	720	669
80°	1462	604	580
85°	1019	403	435

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2470 cd/sqm

TEST NUMBER: P918437

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	347.4	3.2
10°-20°	953.6	8.8
20°-30°	1338.9	12.3
30°-40°	1459.5	13.4
40°-50°	1341.4	12.4
50°-60°	1053.5	9.7
60°-70°	685.7	6.3
70°-80°	353.0	3.3
80°-90°	92.1	0.8
90°-100°	36.3	0.3
100°-110°	135.3	1.2
110°-120°	358.8	3.3
120°-130°	595.1	5.5
130°-140°	632.1	5.8
140°-150°	587.5	5.4
150°-160°	472.3	4.4
160°-170°	304.4	2.8
170°-180°	104.8	1.0
0°-30°	2639.9	24.3
0°-40°	4099.4	37.8
0°-60°	6494.2	59.8
0°-90°	7625.0	70.3
90°-120°	530.4	4.9
90°-150°	2345.2	21.6
90°-180°	3227.0	29.7
0°-180°	10851.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3707	3707	3707	3707	3707	
5°	3707	3690	3646	3676	3666	351
15°	3525	3488	3374	3311	3277	993
25°	3200	3093	2871	2734	2683	1472
35°	2757	2586	2291	2080	2006	1726
45°	2254	2029	1677	1439	1358	1741
55°	1714	1452	1090	889	825	1532
65°	1157	885	584	470	459	1147
75°	617	382	268	245	242	653
85°	144	74	64	64	64	165
90°	1	10	16	20	21	10
95°	52	25	31	35	34	61
105°	242	266	49	57	60	259
115°	458	471	491	123	65	451
125°	647	658	673	679	681	577
135°	801	814	821	829	828	619
145°	929	929	942	948	944	581
155°	1023	1016	1026	1030	1024	472
165°	1078	1074	1076	1082	1076	305
175°	1103	1097	1099	1105	1097	105
180°	1101	1101	1101	1101	1101	

TEST NUMBER: P918437

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3706.6	3706.6	3706.6	3706.6	3706.6
2.5°	3723.3	3706.6	3669.6	3703.4	3696.6
5°	3706.6	3689.9	3646.1	3676.3	3666.4
7.5°	3676.3	3656.4	3609.4	3622.6	3605.8
10°	3636.1	3612.6	3545.7	3535.4	3515.5
12.5°	3585.9	3555.7	3464.9	3445.0	3407.9
15°	3525.4	3488.4	3374.5	3310.8	3277.3
17.5°	3455.0	3401.3	3260.3	3186.6	3132.9
20°	3374.5	3307.3	3139.6	3056.0	2982.0
22.5°	3287.4	3210.1	3015.5	2901.6	2851.3
25°	3200.1	3092.7	2871.3	2733.9	2683.4
27.5°	3096.3	2982.0	2737.1	2579.4	2502.2
30°	2985.5	2857.8	2589.5	2418.6	2327.8
32.5°	2878.1	2723.6	2448.8	2247.5	2163.5
35°	2757.4	2586.2	2291.2	2079.8	2005.8
37.5°	2640.0	2455.3	2143.5	1911.8	1828.2
40°	2515.8	2314.7	1989.1	1750.9	1663.8
42.5°	2388.3	2173.7	1835.0	1586.6	1502.9
45°	2254.2	2029.3	1677.3	1438.8	1358.4
47.5°	2126.8	1888.7	1526.4	1287.9	1214.3
50°	1985.8	1747.8	1378.8	1147.0	1076.9
52.5°	1848.1	1596.5	1237.8	1016.4	952.7
55°	1713.9	1452.4	1090.1	889.0	825.3
57.5°	1576.6	1308.2	959.4	771.6	717.8
60°	1435.7	1167.3	821.7	650.9	597.2
62.5°	1298.3	1030.0	704.3	543.5	516.7
65°	1157.3	885.4	583.7	469.8	459.4
67.5°	1023.2	751.3	469.8	412.5	402.5
70°	882.2	620.7	389.0	355.6	342.0
72.5°	748.0	499.7	325.3	298.6	291.8
75°	617.1	382.2	268.3	244.8	241.7
77.5°	486.5	271.6	211.4	197.9	191.1
80°	365.5	194.7	160.9	147.7	147.7
82.5°	254.8	130.9	110.7	104.0	104.0
85°	144.1	73.7	63.7	63.7	63.7
87.5°	53.7	26.7	26.7	23.5	23.5
90°	0.7	9.5	15.9	20.0	21.4
92.5°	20.0	16.7	19.1	20.7	21.4
95°	51.7	25.4	31.0	35.1	34.2
97.5°	93.2	27.9	40.6	43.0	43.8
100°	141.0	31.9	45.4	51.7	53.3
102.5°	193.5	192.0	47.0	55.7	58.1
105°	242.1	266.0	48.6	57.3	60.5
107.5°	298.6	318.5	50.2	58.9	62.1
110°	352.9	369.5	139.4	59.8	62.9



TEST NUMBER: P918437

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	403.8	418.1	404.6	61.3	63.8
115°	457.9	471.4	491.4	122.6	65.4
117.5°	504.9	520.8	534.4	420.4	211.8
120°	557.5	569.4	583.8	593.4	485.8
122.5°	602.0	614.8	630.8	635.5	636.3
125°	647.4	657.9	672.9	678.6	680.9
127.5°	688.8	700.0	712.0	720.0	720.7
130°	727.9	740.7	749.3	758.1	757.4
132.5°	767.7	778.1	786.8	794.0	793.3
135°	801.2	814.0	821.1	829.1	827.5
137.5°	836.2	845.7	853.8	861.7	859.3
140°	870.4	876.9	885.6	892.8	888.8
142.5°	899.2	904.7	915.1	921.4	917.5
145°	929.4	928.6	942.1	947.7	943.7
147.5°	955.6	953.2	966.8	970.8	967.7
150°	981.1	975.6	988.4	993.1	989.1
152.5°	1002.7	996.3	1008.2	1013.0	1007.5
155°	1023.4	1016.3	1025.8	1030.5	1024.2
157.5°	1040.1	1033.7	1041.0	1046.5	1040.1
160°	1054.4	1049.6	1054.4	1059.2	1053.6
162.5°	1067.1	1062.4	1066.4	1072.0	1064.8
165°	1078.3	1073.6	1075.9	1081.5	1075.9
167.5°	1087.1	1082.2	1084.8	1090.3	1083.1
170°	1094.3	1089.5	1091.0	1096.7	1089.5
172.5°	1099.0	1094.3	1095.9	1101.5	1094.3
175°	1102.9	1097.4	1099.0	1104.6	1096.7
177.5°	1104.6	1099.0	1099.8	1105.5	1098.3
180°	1100.7	1100.7	1100.7	1100.7	1100.7

TEST NUMBER: P918437

CATALOG NUMBER: DFN2DIP-TR4F0-110D040US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.61	13.64	13.38	14.42	15.37	8.58	9.61	9.35	10.39	11.35
	3H	14.30	15.22	15.08	16.02	17.00	9.79	10.71	10.57	11.50	12.48
	4H	14.92	15.78	15.72	16.59	17.58	10.25	11.11	11.05	11.92	12.91
	6H	15.35	16.15	16.16	16.96	17.97	10.58	11.38	11.39	12.19	13.20
	8H	15.48	16.24	16.30	17.07	18.08	10.67	11.43	11.50	12.26	13.27
	12H	15.55	16.27	16.38	17.10	18.13	10.72	11.45	11.55	12.27	13.31
4H	2H	12.65	13.52	13.45	14.32	15.31	9.20	10.07	10.00	10.87	11.87
	3H	14.50	15.22	15.31	16.05	17.06	10.57	11.29	11.39	12.13	13.14
	4H	15.20	15.85	16.03	16.69	17.73	11.13	11.78	11.95	12.62	13.65
	6H	15.72	16.29	16.57	17.15	18.19	11.56	12.12	12.40	12.98	14.03
	8H	15.90	16.43	16.75	17.28	18.34	11.69	12.22	12.54	13.07	14.13
	12H	16.00	16.48	16.87	17.35	18.42	11.77	12.24	12.63	13.12	14.18
8H	4H	15.18	15.71	16.03	16.56	17.62	11.42	11.95	12.27	12.80	13.86
	6H	15.75	16.19	16.63	17.09	18.14	11.95	12.38	12.82	13.28	14.34
	8H	15.97	16.36	16.86	17.25	18.32	12.14	12.53	13.03	13.42	14.49
	12H	16.12	16.46	17.01	17.34	18.47	12.27	12.61	13.16	13.49	14.62
12H	4H	15.14	15.61	16.01	16.49	17.55	11.43	11.91	12.30	12.78	13.84
	6H	15.73	16.11	16.62	17.01	18.08	12.00	12.38	12.88	13.28	14.35
	8H	15.96	16.30	16.85	17.18	18.31	12.22	12.56	13.11	13.44	14.57