

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918464

Luminaire Tested: DFN2DIP-TR4F0-110D110US930-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P918464  
REPORT IS A COMBINATION OF REPORTS P900510 AND P897293  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-110D110US930-RLLFLL  
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 15560.0 lumens  
Efficiency: N/A  
Efficacy: 78.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 197.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9613  
Total Harmonic Distortion (THDi): 0.083  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P918464  
CATALOG NUMBER: DFN2DIP-TR4F0-110D110US930-RLLFLL

### Luminous Intensity Polar Plot

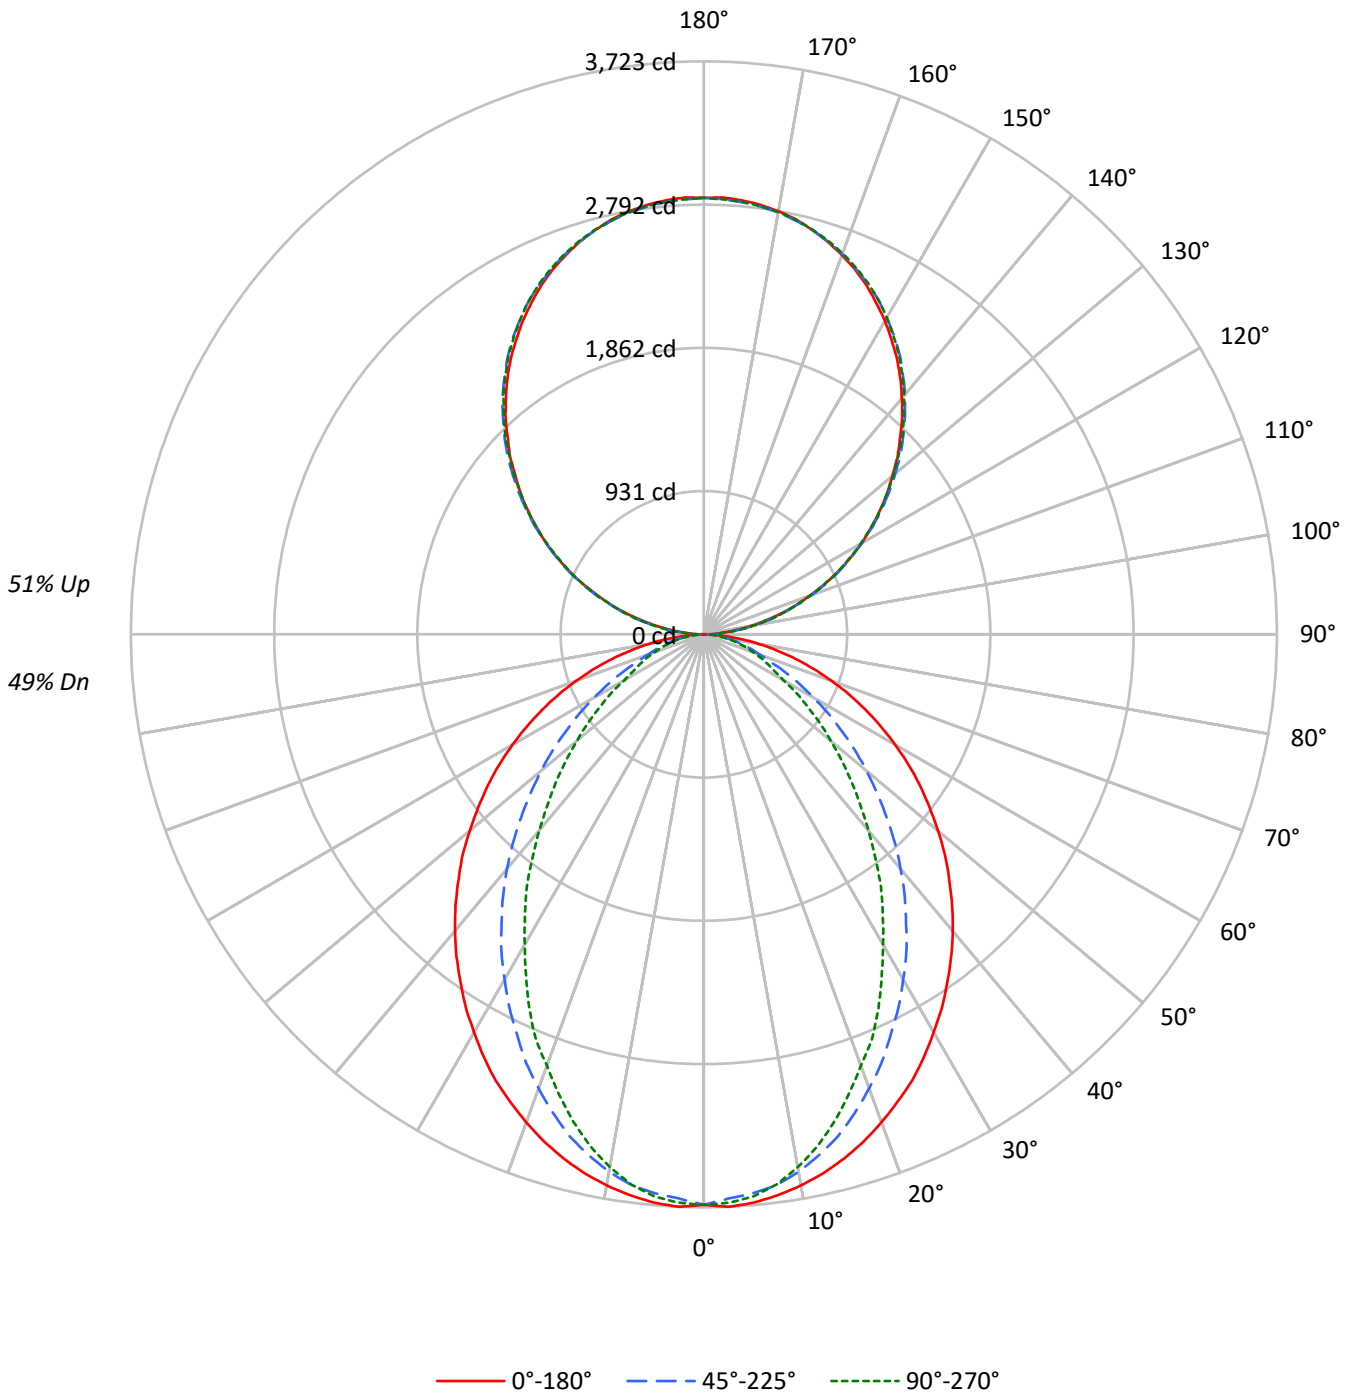



TEST NUMBER: P918464  
 CATALOG NUMBER: DFN2DIP-TR4F0-110D110US930-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55	49			49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42			42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36			36
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35	31			31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31	27			27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24			24
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24	21			21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19			19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17			17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	16			16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14			14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2945	2945	2945
5°	2949	2898	2916
10°	2920	2841	2821
15°	2880	2747	2675
20°	2827	2618	2495
25°	2772	2472	2321
30°	2699	2324	2100
35°	2628	2164	1906
40°	2555	1998	1684
45°	2470	1815	1483
50°	2382	1629	1286
55°	2291	1431	1097
60°	2185	1224	903
65°	2064	1014	813
70°	1916	817	735
75°	1731	720	669
80°	1462	604	580
85°	1019	403	435

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2470 cd/sqm



TEST NUMBER: P918464

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US930-RLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	347.4	2.2
10°-20°	953.6	6.1
20°-30°	1338.9	8.6
30°-40°	1459.5	9.4
40°-50°	1341.4	8.6
50°-60°	1053.5	6.8
60°-70°	685.7	4.4
70°-80°	353.0	2.3
80°-90°	98.2	0.6
90°-100°	175.5	1.1
100°-110°	557.7	3.6
110°-120°	954.3	6.1
120°-130°	1255.1	8.1
130°-140°	1408.8	9.1
140°-150°	1381.5	8.9
150°-160°	1158.9	7.4
160°-170°	768.5	4.9
170°-180°	268.6	1.7
0°-30°	2639.9	17.0
0°-40°	4099.4	26.3
0°-60°	6494.2	41.7
0°-90°	7631.1	49.0
90°-120°	1687.5	10.8
90°-150°	5732.8	36.8
90°-180°	7929.0	51.0
0°-180°	15560.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3707	3707	3707	3707	3707	
5°	3707	3690	3646	3676	3666	351
15°	3525	3488	3374	3311	3277	993
25°	3200	3093	2871	2734	2683	1472
35°	2757	2586	2291	2080	2006	1726
45°	2254	2029	1677	1439	1358	1741
55°	1714	1452	1090	889	825	1532
65°	1157	885	584	470	459	1147
75°	617	382	268	245	242	653
85°	144	74	64	64	64	165
90°	2	31	84	79	81	15
95°	125	149	153	153	149	139
105°	515	522	527	531	531	543
115°	958	971	967	965	958	947
125°	1393	1414	1407	1400	1397	1245
135°	1802	1828	1833	1831	1824	1393
145°	2187	2204	2218	2221	2211	1367
155°	2501	2508	2516	2528	2520	1151
165°	2721	2718	2718	2735	2723	768
175°	2831	2824	2819	2836	2822	269
180°	2836	2836	2836	2836	2836	



TEST NUMBER: P918464

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US930-RLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3706.6	3706.6	3706.6	3706.6	3706.6
2.5°	3723.3	3706.6	3669.6	3703.4	3696.6
5°	3706.6	3689.9	3646.1	3676.3	3666.4
7.5°	3676.3	3656.4	3609.4	3622.6	3605.8
10°	3636.1	3612.6	3545.7	3535.4	3515.5
12.5°	3585.9	3555.7	3464.9	3445.0	3407.9
15°	3525.4	3488.4	3374.5	3310.8	3277.3
17.5°	3455.0	3401.3	3260.3	3186.6	3132.9
20°	3374.5	3307.3	3139.6	3056.0	2982.0
22.5°	3287.4	3210.1	3015.5	2901.6	2851.3
25°	3200.1	3092.7	2871.3	2733.9	2683.4
27.5°	3096.3	2982.0	2737.1	2579.4	2502.2
30°	2985.5	2857.8	2589.5	2418.6	2327.8
32.5°	2878.1	2723.6	2448.8	2247.5	2163.5
35°	2757.4	2586.2	2291.2	2079.8	2005.8
37.5°	2640.0	2455.3	2143.5	1911.8	1828.2
40°	2515.8	2314.7	1989.1	1750.9	1663.8
42.5°	2388.3	2173.7	1835.0	1586.6	1502.9
45°	2254.2	2029.3	1677.3	1438.8	1358.4
47.5°	2126.8	1888.7	1526.4	1287.9	1214.3
50°	1985.8	1747.8	1378.8	1147.0	1076.9
52.5°	1848.1	1596.5	1237.8	1016.4	952.7
55°	1713.9	1452.4	1090.1	889.0	825.3
57.5°	1576.6	1308.2	959.4	771.6	717.8
60°	1435.7	1167.3	821.7	650.9	597.2
62.5°	1298.3	1030.0	704.3	543.5	516.7
65°	1157.3	885.4	583.7	469.8	459.4
67.5°	1023.2	751.3	469.8	412.5	402.5
70°	882.2	620.7	389.0	355.6	342.0
72.5°	748.0	499.7	325.3	298.6	291.8
75°	617.1	382.2	268.3	244.8	241.7
77.5°	486.5	271.6	211.4	197.9	191.1
80°	365.5	194.7	160.9	147.7	147.7
82.5°	254.8	130.9	110.7	104.0	104.0
85°	144.1	73.7	63.7	63.7	63.7
87.5°	53.7	26.7	26.7	23.5	23.5
90°	2.5	30.8	83.8	78.7	81.2
92.5°	53.0	71.8	74.4	77.0	77.0
95°	124.8	148.8	153.0	153.0	148.8
97.5°	207.8	230.0	239.5	239.5	239.5
100°	303.5	323.2	330.0	330.0	327.5
102.5°	404.5	419.0	428.4	431.0	428.4
105°	514.8	521.6	526.8	531.0	531.0
107.5°	624.2	634.5	634.5	636.2	624.2
110°	730.3	744.0	744.0	744.0	737.1



TEST NUMBER: P918464

CATALOG NUMBER: DFN2DIP-TR4F0-110D110US930-RLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	844.8	859.3	856.8	849.9	844.8
115°	957.7	971.3	967.1	964.6	957.7
117.5°	1069.8	1088.5	1076.5	1069.8	1062.9
120°	1182.6	1201.4	1182.6	1182.6	1174.9
122.5°	1285.2	1309.1	1297.1	1290.3	1285.2
125°	1392.9	1414.3	1407.4	1399.8	1397.2
127.5°	1498.1	1524.6	1515.2	1505.0	1498.1
130°	1596.4	1627.3	1622.9	1617.8	1608.4
132.5°	1706.7	1730.7	1732.4	1720.4	1713.6
135°	1801.6	1828.1	1833.3	1830.8	1823.9
137.5°	1907.7	1929.1	1933.3	1931.6	1921.4
140°	2000.9	2022.3	2034.3	2034.3	2024.9
142.5°	2096.7	2118.1	2124.9	2127.4	2118.1
145°	2187.3	2204.4	2218.1	2220.6	2211.3
147.5°	2268.6	2289.9	2300.2	2304.4	2295.1
150°	2352.4	2366.9	2376.3	2384.0	2376.3
152.5°	2426.7	2441.2	2453.2	2462.7	2453.2
155°	2501.2	2507.9	2515.7	2527.7	2519.9
157.5°	2565.3	2570.4	2574.6	2591.8	2579.8
160°	2622.6	2627.7	2630.2	2644.8	2634.6
162.5°	2675.6	2675.6	2678.2	2694.4	2682.4
165°	2720.9	2718.3	2718.3	2735.4	2723.4
167.5°	2761.9	2754.2	2754.2	2771.4	2759.4
170°	2792.7	2785.9	2783.3	2800.4	2785.9
172.5°	2814.1	2807.2	2804.7	2821.8	2807.2
175°	2831.2	2824.4	2819.2	2836.3	2821.8
177.5°	2840.6	2833.7	2828.6	2843.2	2828.6
180°	2836.3	2836.3	2836.3	2836.3	2836.3



TEST NUMBER: P918464  
 CATALOG NUMBER: DFN2DIP-TR4F0-110D110US930-RLFL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.80	11.62	11.77	12.61	13.89	6.78	7.60	7.75	8.58	9.87
	3H	12.48	13.21	13.46	14.20	15.51	7.96	8.70	8.95	9.69	11.00
	4H	13.09	13.78	14.08	14.78	16.09	8.42	9.11	9.41	10.11	11.42
	6H	13.51	14.15	14.51	15.15	16.48	8.74	9.38	9.74	10.38	11.71
	8H	13.63	14.24	14.65	15.26	16.58	8.83	9.44	9.84	10.45	11.78
	12H	13.70	14.27	14.71	15.28	16.63	8.87	9.45	9.89	10.46	11.81
4H	2H	10.82	11.51	11.82	12.51	13.83	7.37	8.07	8.37	9.06	10.38
	3H	12.65	13.23	13.66	14.25	15.58	8.72	9.30	9.73	10.32	11.65
	4H	13.34	13.87	14.36	14.88	16.24	9.27	9.80	10.29	10.81	12.17
	6H	13.85	14.31	14.88	15.35	16.70	9.69	10.14	10.72	11.18	12.53
	8H	14.03	14.45	15.06	15.48	16.85	9.82	10.24	10.85	11.27	12.64
	12H	14.12	14.51	15.17	15.55	16.92	9.88	10.27	10.93	11.31	12.68
8H	4H	13.31	13.73	14.34	14.76	16.13	9.55	9.97	10.58	11.00	12.37
	6H	13.87	14.22	14.93	15.30	16.66	10.07	10.42	11.12	11.49	12.85
	8H	14.09	14.40	15.15	15.46	16.84	10.26	10.57	11.32	11.63	13.01
	12H	14.23	14.50	15.29	15.55	16.98	10.38	10.65	11.44	11.70	13.13
12H	4H	13.26	13.64	14.31	14.69	16.06	9.55	9.94	10.60	10.98	12.35
	6H	13.85	14.16	14.91	15.21	16.60	10.12	10.42	11.18	11.48	12.87
	8H	14.07	14.34	15.13	15.39	16.82	10.33	10.60	11.39	11.65	13.08