

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918478

Luminaire Tested: DFN2DIP-TR4F0-120D060US930-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P918478  
REPORT IS A COMBINATION OF REPORTS P900421 AND P897293  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR4F0-120D060US930-FLLFLL  
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 14015.0 lumens  
Efficiency: N/A  
Efficacy: 82.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 170.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9821  
Total Harmonic Distortion (THDi): 0.08  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P918478  
CATALOG NUMBER: DFN2DIP-TR4F0-120D060US930-FLLFLL

### Luminous Intensity Polar Plot

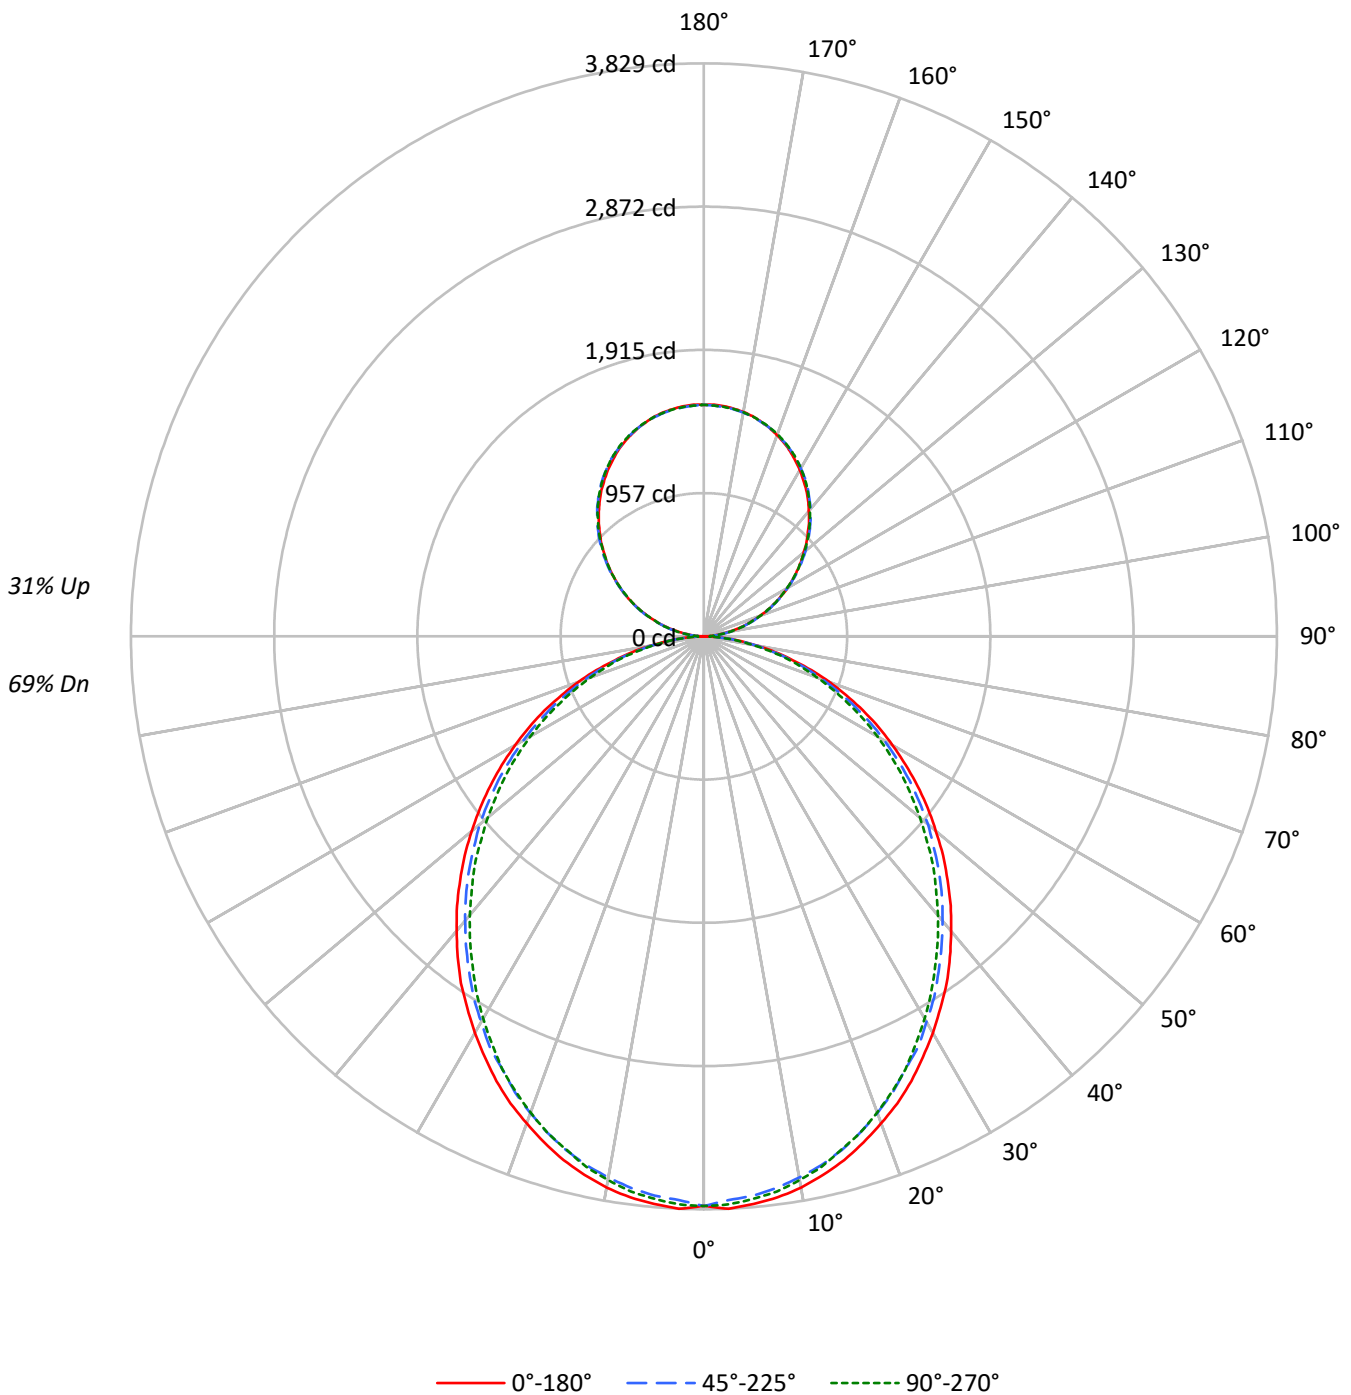



TEST NUMBER: P918478

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US930-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	112	112	112	112	106	106	106	106	94	94	94	83	83	83	74	74	74	69			
1	102	98	94	90	96	92	89	86	83	80	77	74	71	70	65	64	62	58			
2	93	85	79	74	88	81	75	70	72	68	64	65	61	58	57	55	52	49			
3	85	75	67	61	80	71	64	59	64	58	54	57	53	49	51	48	45	41			
4	78	67	58	52	73	63	56	50	57	51	46	51	46	42	46	42	39	35			
5	71	59	51	45	67	56	49	43	51	45	40	46	41	37	41	37	34	31			
6	66	53	45	39	62	51	43	38	46	40	35	41	36	32	37	33	30	27			
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	26	24			
8	57	44	36	31	54	42	35	30	38	32	28	35	29	26	31	27	24	22			
9	53	40	33	27	50	39	31	26	35	29	25	32	27	23	29	25	21	19			
10	50	37	30	25	47	36	29	24	32	27	22	30	25	21	27	23	20	18			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3024	3024	3024
5°	3029	2982	3002
10°	3005	2942	2961
15°	2960	2893	2898
20°	2901	2826	2833
25°	2841	2746	2757
30°	2767	2671	2662
35°	2697	2582	2561
40°	2610	2493	2464
45°	2523	2404	2366
50°	2429	2310	2252
55°	2329	2201	2147
60°	2218	2072	2026
65°	2096	1939	1885
70°	1940	1776	1732
75°	1724	1581	1591
80°	1465	1333	1322
85°	1060	904	876

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2523 cd/sqm



TEST NUMBER: P918478

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US930-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	358.3	2.6
10°-20°	1008.1	7.2
20°-30°	1481.5	10.6
30°-40°	1720.7	12.3
40°-50°	1718.6	12.3
50°-60°	1498.5	10.7
60°-70°	1107.8	7.9
70°-80°	626.7	4.5
80°-90°	169.8	1.2
90°-100°	95.7	0.7
100°-110°	304.2	2.2
110°-120°	520.6	3.7
120°-130°	684.6	4.9
130°-140°	768.4	5.5
140°-150°	753.5	5.4
150°-160°	632.1	4.5
160°-170°	419.2	3.0
170°-180°	146.5	1.0
0°-30°	2848.0	20.3
0°-40°	4568.7	32.6
0°-60°	7785.8	55.6
0°-90°	9690.1	69.1
90°-120°	920.5	6.6
90°-150°	3127.0	22.3
90°-180°	4325.0	30.9
0°-180°	14015.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3807	3807	3807	3807	3807	
5°	3807	3792	3752	3781	3774	361
15°	3624	3602	3554	3569	3551	1021
25°	3280	3251	3188	3196	3188	1509
35°	2830	2793	2734	2712	2694	1767
45°	2303	2277	2222	2182	2167	1777
55°	1743	1720	1677	1633	1614	1558
65°	1175	1153	1117	1084	1065	1162
75°	615	608	589	567	575	656
85°	150	146	143	132	128	167
90°	1	17	46	43	44	13
95°	68	81	84	84	81	76
105°	281	284	287	290	290	296
115°	522	530	528	526	522	517
125°	760	771	768	764	762	679
135°	983	997	1000	999	995	760
145°	1193	1202	1210	1211	1206	745
155°	1364	1368	1372	1379	1374	628
165°	1484	1483	1483	1492	1486	419
175°	1544	1541	1538	1547	1539	147
180°	1547	1547	1547	1547	1547	



TEST NUMBER: P918478

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US930-FLLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3806.9	3806.9	3806.9	3806.9	3806.9
2.5°	3829.0	3810.7	3770.3	3806.9	3799.9
5°	3806.9	3792.4	3752.1	3781.2	3774.2
7.5°	3781.2	3759.4	3719.1	3748.6	3741.2
10°	3741.2	3715.6	3671.7	3700.8	3690.0
12.5°	3686.0	3664.3	3620.4	3638.7	3631.3
15°	3623.9	3602.2	3554.4	3569.1	3550.9
17.5°	3547.0	3525.3	3477.5	3495.8	3477.5
20°	3462.7	3441.0	3389.8	3400.6	3386.3
22.5°	3378.8	3345.8	3298.0	3298.0	3290.7
25°	3279.8	3250.7	3188.5	3195.6	3188.5
27.5°	3169.9	3144.3	3096.9	3086.0	3067.8
30°	3060.4	3030.9	2976.1	2965.2	2950.5
32.5°	2943.1	2921.4	2862.7	2840.6	2825.8
35°	2829.7	2793.2	2734.5	2712.4	2694.2
37.5°	2701.5	2668.6	2609.9	2584.3	2566.0
40°	2569.9	2540.4	2481.7	2449.1	2434.3
42.5°	2441.7	2412.2	2353.9	2317.1	2295.3
45°	2302.6	2277.0	2221.9	2181.9	2167.1
47.5°	2167.1	2141.5	2082.8	2042.5	2020.7
50°	2024.2	2006.0	1954.7	1903.4	1885.1
52.5°	1885.1	1859.5	1812.2	1771.7	1746.1
55°	1742.6	1720.5	1676.6	1632.7	1614.5
57.5°	1599.7	1581.4	1533.7	1489.8	1475.0
60°	1456.8	1442.4	1391.1	1350.8	1339.9
62.5°	1317.8	1292.1	1255.6	1219.1	1204.4
65°	1175.3	1153.1	1116.6	1083.5	1065.4
67.5°	1028.8	1010.2	977.5	951.9	937.2
70°	893.2	878.5	845.5	819.9	805.5
72.5°	754.2	739.5	721.2	695.6	684.7
75°	614.8	607.8	589.1	567.4	574.8
77.5°	490.5	475.7	468.4	457.5	446.6
80°	366.2	362.3	355.0	344.1	336.7
82.5°	248.9	248.9	245.5	230.7	230.7
85°	149.9	146.4	142.9	131.7	128.2
87.5°	66.0	58.6	51.3	40.4	36.5
90°	1.4	16.8	45.7	42.9	44.3
92.5°	28.9	39.2	40.6	42.0	42.0
95°	68.1	81.1	83.5	83.5	81.1
97.5°	113.3	125.5	130.6	130.6	130.6
100°	165.6	176.3	180.0	180.0	178.6
102.5°	220.6	228.5	233.7	235.1	233.7
105°	280.8	284.5	287.3	289.7	289.7
107.5°	340.5	346.1	346.1	347.0	340.5
110°	398.4	405.8	405.8	405.8	402.0



TEST NUMBER: P918478

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US930-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	460.8	468.7	467.3	463.6	460.8
115°	522.4	529.9	527.5	526.1	522.4
117.5°	583.5	593.8	587.2	583.5	579.8
120°	645.1	655.3	645.1	645.1	640.8
122.5°	701.0	714.0	707.5	703.8	701.0
125°	759.8	771.4	767.7	763.5	762.1
127.5°	817.2	831.6	826.5	820.9	817.2
130°	870.8	887.6	885.3	882.5	877.3
132.5°	931.0	944.0	944.9	938.4	934.7
135°	982.8	997.2	1000.0	998.6	994.8
137.5°	1040.6	1052.2	1054.6	1053.6	1048.1
140°	1091.4	1103.1	1109.6	1109.6	1104.5
142.5°	1143.6	1155.3	1159.0	1160.4	1155.3
145°	1193.1	1202.4	1209.9	1211.3	1206.2
147.5°	1237.4	1249.0	1254.7	1256.9	1251.8
150°	1283.1	1291.0	1296.2	1300.3	1296.2
152.5°	1323.6	1331.6	1338.1	1343.3	1338.1
155°	1364.2	1368.0	1372.1	1378.8	1374.5
157.5°	1399.2	1402.1	1404.4	1413.7	1407.2
160°	1430.5	1433.3	1434.7	1442.6	1437.0
162.5°	1459.4	1459.4	1460.8	1469.7	1463.1
165°	1484.1	1482.7	1482.7	1492.1	1485.6
167.5°	1506.5	1502.4	1502.4	1511.6	1505.1
170°	1523.3	1519.6	1518.2	1527.5	1519.6
172.5°	1535.0	1531.2	1529.8	1539.1	1531.2
175°	1544.3	1540.6	1537.7	1547.1	1539.1
177.5°	1549.4	1545.7	1542.9	1550.8	1542.9
180°	1547.1	1547.1	1547.1	1547.1	1547.1



TEST NUMBER: P918478  
 CATALOG NUMBER: DFN2DIP-TR4F0-120D060US930-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.71	13.78	13.49	14.57	15.54	12.28	13.35	13.06	14.14	15.11
	3H	14.39	15.35	15.18	16.15	17.15	13.92	14.87	14.70	15.68	16.68
	4H	14.99	15.89	15.79	16.70	17.71	14.51	15.42	15.32	16.23	17.24
	6H	15.40	16.23	16.21	17.05	18.07	14.92	15.75	15.74	16.58	17.60
	8H	15.51	16.30	16.33	17.14	18.17	15.03	15.83	15.86	16.67	17.69
	12H	15.56	16.32	16.39	17.15	18.20	15.08	15.84	15.91	16.67	17.72
4H	2H	13.20	14.10	14.01	14.92	15.93	12.86	13.76	13.66	14.57	15.58
	3H	15.08	15.84	15.90	16.69	17.71	14.69	15.45	15.51	16.29	17.32
	4H	15.81	16.49	16.64	17.34	18.39	15.40	16.09	16.24	16.93	17.99
	6H	16.33	16.93	17.18	17.80	18.86	15.92	16.52	16.77	17.39	18.45
	8H	16.49	17.04	17.34	17.91	18.98	16.08	16.63	16.93	17.50	18.57
	12H	16.57	17.07	17.44	17.96	19.03	16.15	16.65	17.02	17.53	18.61
8H	4H	16.02	16.57	16.87	17.44	18.51	15.66	16.21	16.51	17.08	18.15
	6H	16.66	17.12	17.54	18.03	19.10	16.30	16.76	17.18	17.66	18.74
	8H	16.88	17.29	17.77	18.19	19.28	16.51	16.92	17.41	17.82	18.91
	12H	17.02	17.38	17.92	18.28	19.42	16.64	17.00	17.53	17.89	19.03
12H	4H	16.01	16.52	16.89	17.40	18.48	15.66	16.16	16.54	17.05	18.13
	6H	16.69	17.10	17.58	18.00	19.09	16.34	16.75	17.23	17.65	18.74
	8H	16.94	17.30	17.84	18.20	19.34	16.59	16.95	17.48	17.84	18.98