

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920977

Luminaire Tested: DFN2DIP-TR4F0-050D110US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920977
REPORT IS A COMBINATION OF REPORTS P902018 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-050D110US935-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13035.5 lumens
Efficiency: N/A
Efficacy: 102.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 126.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920977

CATALOG NUMBER: DFN2DIP-TR4F0-050D110US935-RLLONL

Luminous Intensity Polar Plot

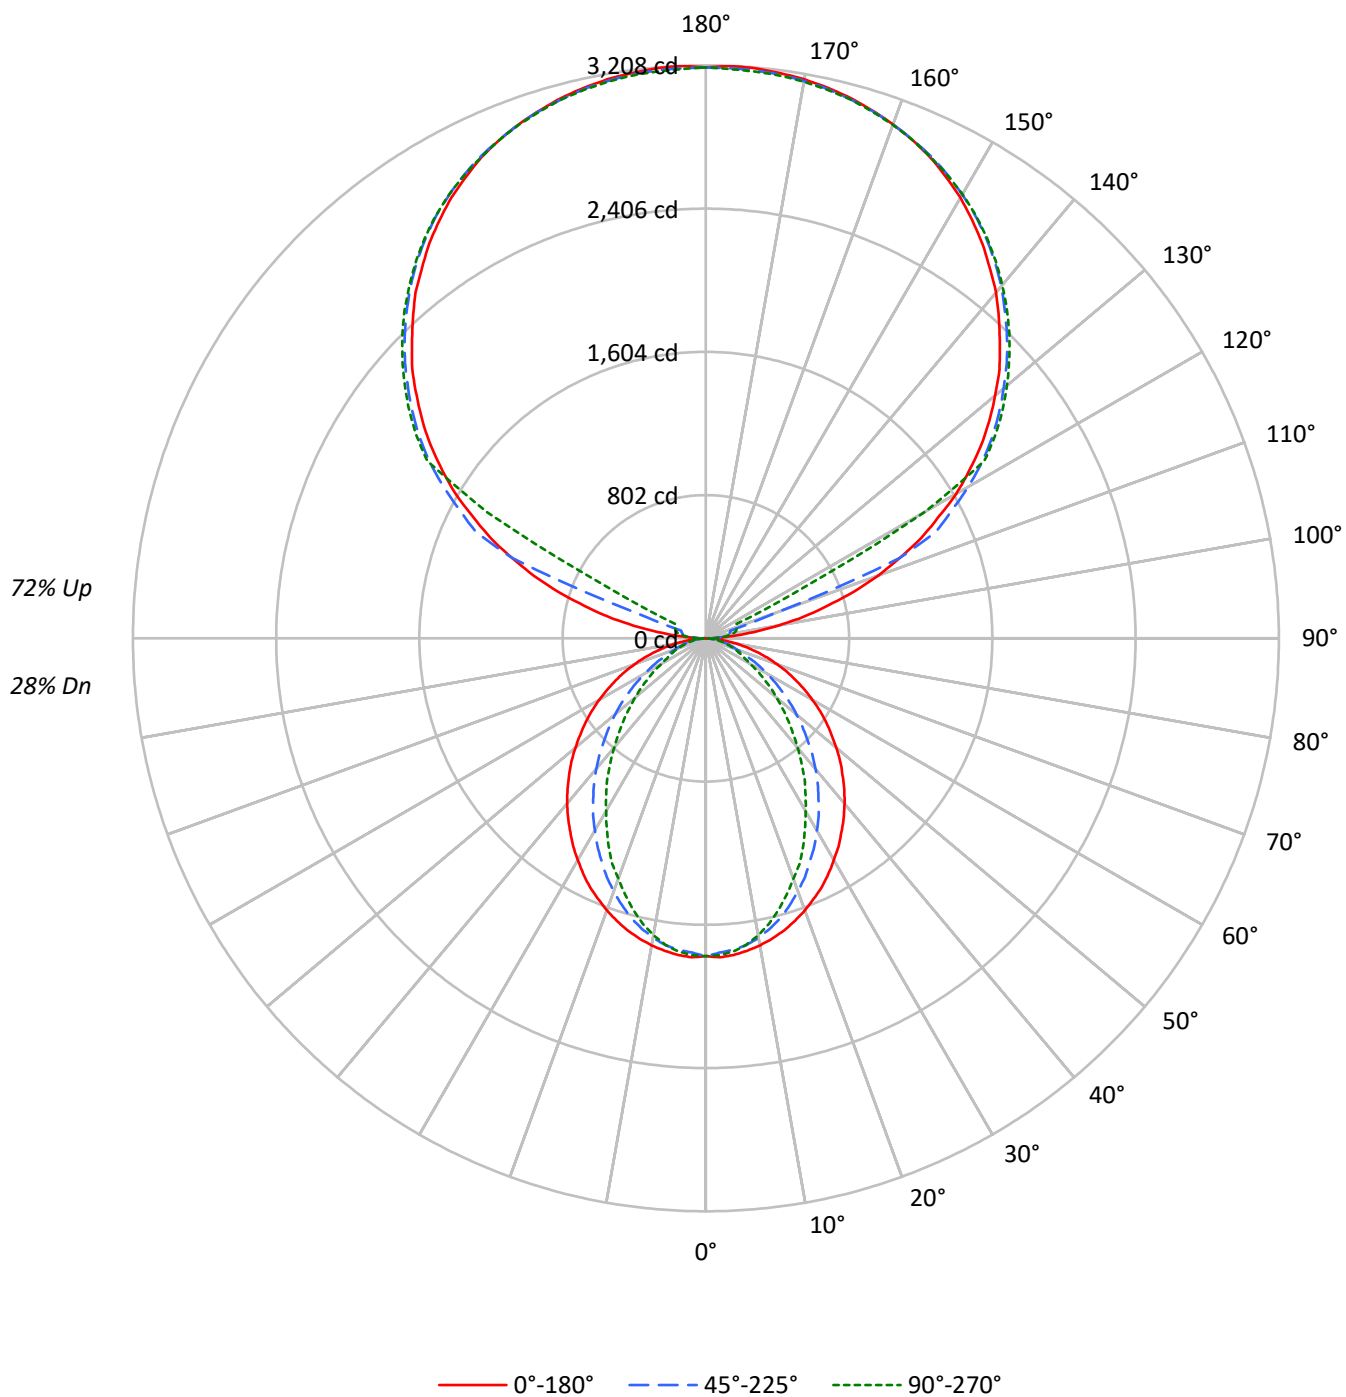

TEST NUMBER: P920977

CATALOG NUMBER: DFN2DIP-TR4F0-050D110US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	29	27	26
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	26	24	23
4	71	61	53	48	63	55	49	44	43	39	35	33	30	28	23	21	20
5	65	54	47	41	58	49	42	37	39	34	31	30	26	24	21	19	17
6	60	49	41	35	54	44	37	33	35	30	27	27	24	21	19	17	15
7	55	44	36	31	50	40	33	28	32	27	24	24	21	19	17	15	14
8	51	40	32	27	46	36	30	25	29	24	21	22	19	17	16	14	12
9	48	36	29	24	43	33	27	22	26	22	19	20	17	15	15	13	11
10	45	33	26	22	40	30	24	20	24	20	17	19	16	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1414	1414	1414
5°	1416	1391	1400
10°	1402	1364	1354
15°	1382	1319	1284
20°	1357	1257	1197
25°	1331	1187	1114
30°	1296	1115	1008
35°	1261	1039	915
40°	1226	959	808
45°	1186	871	712
50°	1144	782	617
55°	1100	687	527
60°	1049	587	433
65°	991	487	390
70°	920	392	353
75°	831	346	321
80°	702	290	278
85°	489	194	209

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1696 cd/sqm

TEST NUMBER: P920977

CATALOG NUMBER: DFN2DIP-TR4F0-050D110US935-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	166.8	1.3
10°-20°	457.8	3.5
20°-30°	642.7	4.9
30°-40°	700.6	5.4
40°-50°	643.9	4.9
50°-60°	505.7	3.9
60°-70°	329.2	2.5
70°-80°	169.5	1.3
80°-90°	48.9	0.4
90°-100°	105.4	0.8
100°-110°	392.9	3.0
110°-120°	1042.0	8.0
120°-130°	1728.3	13.3
130°-140°	1835.9	14.1
140°-150°	1706.2	13.1
150°-160°	1371.8	10.5
160°-170°	883.9	6.8
170°-180°	304.2	2.3
0°-30°	1267.2	9.7
0°-40°	1967.8	15.1
0°-60°	3117.4	23.9
0°-90°	3664.9	28.1
90°-120°	1540.3	11.8
90°-150°	6810.7	52.2
90°-180°	9371.0	71.9
0°-180°	13035.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1779	1779	1779	1779	1779	
5°	1779	1771	1750	1765	1760	169
15°	1692	1675	1620	1589	1573	477
25°	1536	1484	1378	1312	1288	706
35°	1324	1242	1100	998	963	828
45°	1082	974	805	691	652	836
55°	823	697	523	427	396	735
65°	556	425	280	226	221	551
75°	296	184	129	118	116	313
85°	69	35	31	31	31	79
90°	2	28	46	58	62	12
95°	150	74	90	102	99	178
105°	703	773	141	166	176	751
115°	1330	1369	1427	356	190	1309
125°	1880	1910	1954	1971	1978	1677
135°	2327	2364	2384	2408	2403	1797
145°	2699	2697	2736	2752	2741	1688
155°	2972	2951	2979	2993	2974	1370
165°	3132	3118	3125	3141	3125	885
175°	3203	3187	3192	3208	3185	305
180°	3196	3196	3196	3196	3196	

TEST NUMBER: P920977

CATALOG NUMBER: DFN2DIP-TR4F0-050D110US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1779.3	1779.3	1779.3	1779.3	1779.3
2.5°	1787.3	1779.3	1761.5	1777.7	1774.4
5°	1779.3	1771.2	1750.2	1764.7	1760.0
7.5°	1764.7	1755.1	1732.6	1739.0	1730.9
10°	1745.4	1734.1	1702.0	1697.1	1687.5
12.5°	1721.3	1706.8	1663.3	1653.7	1635.9
15°	1692.3	1674.6	1619.9	1589.3	1573.2
17.5°	1658.5	1632.7	1565.0	1529.6	1503.8
20°	1619.9	1587.6	1507.1	1467.0	1431.4
22.5°	1578.0	1540.9	1447.5	1392.8	1368.7
25°	1536.1	1484.5	1378.3	1312.3	1288.1
27.5°	1486.3	1431.4	1313.9	1238.2	1201.2
30°	1433.1	1371.8	1243.0	1161.0	1117.4
32.5°	1381.6	1307.4	1175.5	1078.8	1038.5
35°	1323.6	1241.5	1099.8	998.3	962.9
37.5°	1267.2	1178.6	1029.0	917.7	877.6
40°	1207.6	1111.1	954.8	840.5	798.7
42.5°	1146.5	1043.4	880.8	761.6	721.4
45°	1082.1	974.1	805.1	690.7	652.0
47.5°	1020.9	906.6	732.7	618.3	582.9
50°	953.3	839.0	661.8	550.6	516.9
52.5°	887.2	766.4	594.2	487.9	457.4
55°	822.8	697.1	523.2	426.7	396.1
57.5°	756.8	628.0	460.5	370.4	344.6
60°	689.1	560.3	394.4	312.5	286.6
62.5°	623.2	494.4	338.1	260.9	248.1
65°	555.5	425.1	280.2	225.5	220.6
67.5°	491.1	360.7	225.5	198.0	193.2
70°	423.5	297.9	186.8	170.6	164.2
72.5°	359.1	239.9	156.2	143.4	140.1
75°	296.3	183.5	128.8	117.5	116.0
77.5°	233.5	130.4	101.5	95.0	91.7
80°	175.5	93.4	77.2	70.9	70.9
82.5°	122.3	62.9	53.1	49.9	49.9
85°	69.2	35.4	30.6	30.6	30.6
87.5°	25.8	12.8	12.8	11.3	11.3
90°	2.2	27.7	46.1	57.9	62.3
92.5°	57.9	48.6	55.4	60.2	62.3
95°	150.2	73.9	90.1	101.9	99.4
97.5°	270.5	81.0	117.8	124.9	127.2
100°	409.5	92.6	131.8	150.2	154.9
102.5°	561.9	557.5	136.5	161.8	168.9
105°	703.1	772.6	141.2	166.4	175.8
107.5°	867.4	925.0	145.9	171.1	180.5
110°	1024.7	1073.1	404.8	173.6	182.6

TEST NUMBER: P920977

CATALOG NUMBER: DFN2DIP-TR4F0-050D110US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1172.8	1214.2	1174.9	178.0	185.1
115°	1329.8	1369.1	1427.1	356.2	189.8
117.5°	1466.4	1512.5	1552.0	1221.1	615.2
120°	1619.0	1653.6	1695.4	1723.1	1410.8
122.5°	1748.4	1785.5	1831.9	1845.6	1848.1
125°	1880.2	1910.5	1954.4	1970.6	1977.5
127.5°	2000.5	2032.9	2067.8	2090.8	2093.1
130°	2113.9	2151.0	2176.3	2201.8	2199.7
132.5°	2229.6	2259.8	2285.1	2305.9	2303.8
135°	2326.8	2363.9	2384.4	2407.9	2403.1
137.5°	2428.4	2456.2	2479.5	2502.6	2495.7
140°	2527.9	2546.5	2571.8	2592.6	2581.1
142.5°	2611.3	2627.5	2657.5	2675.9	2664.4
145°	2699.2	2696.7	2736.0	2752.3	2740.7
147.5°	2775.3	2768.5	2807.7	2819.3	2810.2
150°	2849.5	2833.3	2870.3	2884.1	2872.5
152.5°	2911.8	2893.4	2928.0	2942.0	2925.8
155°	2972.0	2951.3	2979.1	2992.8	2974.4
157.5°	3020.6	3002.1	3023.0	3039.2	3020.6
160°	3062.3	3048.3	3062.3	3076.0	3059.8
162.5°	3099.1	3085.4	3096.9	3113.1	3092.3
165°	3131.5	3117.8	3124.6	3140.8	3124.6
167.5°	3157.0	3143.1	3150.2	3166.4	3145.6
170°	3177.9	3163.9	3168.6	3184.8	3163.9
172.5°	3191.6	3177.9	3182.6	3198.8	3177.9
175°	3203.2	3187.0	3191.6	3207.9	3184.8
177.5°	3207.9	3191.6	3194.1	3210.3	3189.5
180°	3196.4	3196.4	3196.4	3196.4	3196.4

TEST NUMBER: P920977

CATALOG NUMBER: DFN2DIP-TR4F0-050D110US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.85	6.53	6.98	7.64	9.20	1.82	2.50	2.95	3.62	5.17
	3H	7.51	8.12	8.65	9.25	10.82	3.00	3.60	4.14	4.73	6.30
	4H	8.11	8.69	9.26	9.82	11.39	3.44	4.02	4.59	5.15	6.72
	6H	8.53	9.06	9.68	10.19	11.77	3.76	4.29	4.91	5.42	7.00
	8H	8.65	9.15	9.81	10.30	11.88	3.84	4.35	5.00	5.49	7.07
	12H	8.71	9.18	9.87	10.32	11.92	3.88	4.36	5.04	5.50	7.10
4H	2H	5.85	6.42	7.00	7.55	9.12	2.40	2.97	3.55	4.10	5.68
	3H	7.66	8.14	8.82	9.29	10.88	3.73	4.21	4.89	5.37	6.95
	4H	8.35	8.79	9.51	9.93	11.54	4.28	4.72	5.44	5.86	7.47
	6H	8.85	9.23	10.02	10.40	11.99	4.69	5.07	5.86	6.23	7.83
	8H	9.03	9.38	10.19	10.53	12.15	4.82	5.17	5.98	6.32	7.94
	12H	9.11	9.43	10.30	10.60	12.22	4.87	5.19	6.06	6.36	7.98
8H	4H	8.30	8.66	9.47	9.81	11.43	4.55	4.90	5.71	6.05	7.67
	6H	8.86	9.15	10.05	10.35	11.96	5.06	5.35	6.24	6.55	8.16
	8H	9.08	9.33	10.27	10.51	12.14	5.25	5.50	6.44	6.68	8.31
	12H	9.21	9.43	10.41	10.61	12.27	5.36	5.59	6.56	6.76	8.42
12H	4H	8.25	8.57	9.43	9.74	11.35	4.54	4.86	5.72	6.03	7.65
	6H	8.84	9.09	10.03	10.27	11.90	5.11	5.36	6.30	6.54	8.17
	8H	9.05	9.28	10.25	10.45	12.11	5.31	5.53	6.51	6.71	8.37

END OF REPORT