

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920981

Luminaire Tested: DFN2DIP-TR4F0-050D120US935-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920981
REPORT IS A COMBINATION OF REPORTS P902036 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-050D120US935-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13887.9 lumens
Efficiency: N/A
Efficacy: 104.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 133.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920981

CATALOG NUMBER: DFN2DIP-TR4F0-050D120US935-RLLONL

Luminous Intensity Polar Plot

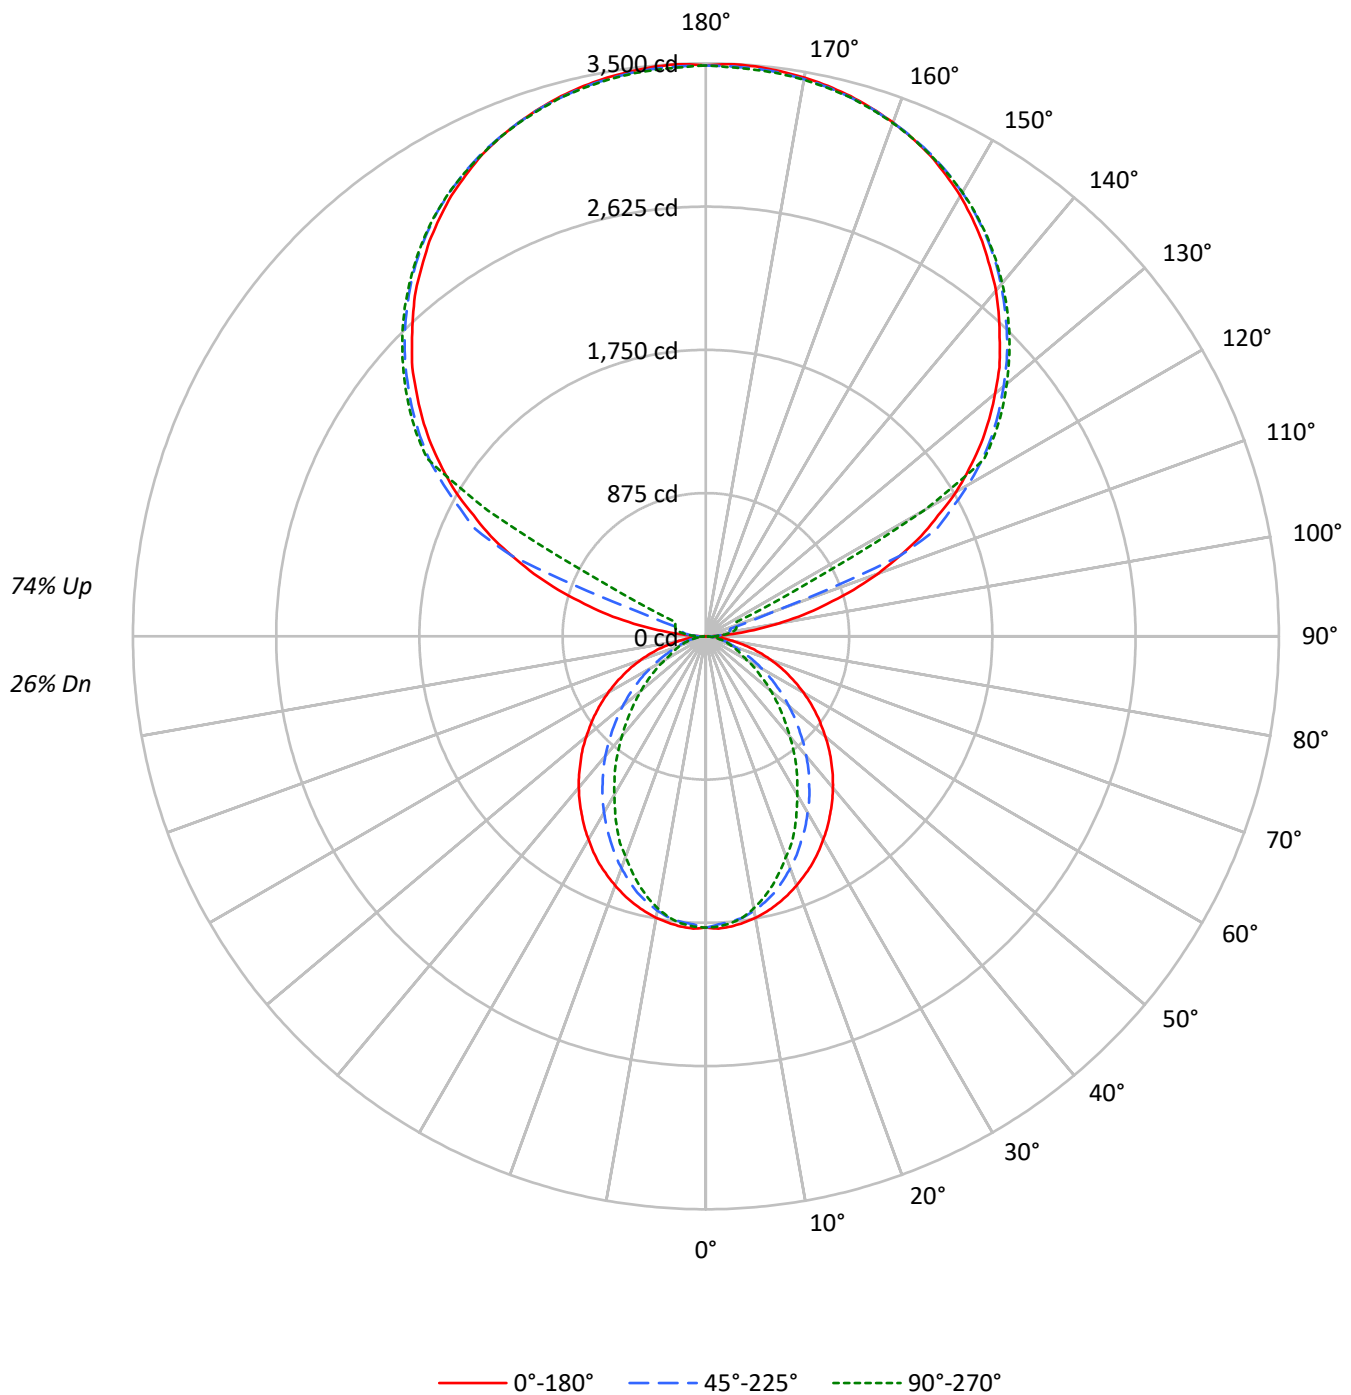

TEST NUMBER: P920981

CATALOG NUMBER: DFN2DIP-TR4F0-050D120US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	34	34	34
1	93	89	85	82	83	79	76	74	62	60	58	46	44	43	31	30	29
2	85	78	72	67	75	70	65	61	54	51	48	40	38	36	27	26	25
3	77	68	62	56	69	61	56	51	48	44	41	36	33	31	24	23	22
4	71	61	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19
5	65	54	46	41	58	49	42	37	38	34	30	29	26	23	20	18	17
6	60	48	41	35	53	44	37	32	35	30	26	26	23	20	18	16	15
7	55	44	36	31	49	39	33	28	31	27	23	24	20	18	17	15	13
8	51	39	32	27	46	36	29	25	28	24	20	22	18	16	15	13	12
9	48	36	29	24	42	33	26	22	26	21	18	20	17	14	14	12	11
10	44	33	26	21	40	30	24	20	24	19	16	18	15	13	13	11	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1414	1414	1414
5°	1416	1391	1400
10°	1402	1364	1354
15°	1382	1319	1284
20°	1357	1257	1197
25°	1331	1187	1114
30°	1296	1115	1008
35°	1261	1039	915
40°	1226	959	808
45°	1186	871	712
50°	1144	782	617
55°	1100	687	527
60°	1049	587	433
65°	991	487	390
70°	920	392	353
75°	831	346	321
80°	702	290	278
85°	489	194	209

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1851 cd/sqm

TEST NUMBER: P920981

CATALOG NUMBER: DFN2DIP-TR4F0-050D120US935-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	166.8	1.2
10°-20°	457.8	3.3
20°-30°	642.7	4.6
30°-40°	700.6	5.0
40°-50°	643.9	4.6
50°-60°	505.7	3.6
60°-70°	329.2	2.4
70°-80°	169.5	1.2
80°-90°	49.4	0.4
90°-100°	115.0	0.8
100°-110°	428.6	3.1
110°-120°	1136.8	8.2
120°-130°	1885.4	13.6
130°-140°	2002.8	14.4
140°-150°	1861.3	13.4
150°-160°	1496.5	10.8
160°-170°	964.3	6.9
170°-180°	331.9	2.4
0°-30°	1267.2	9.1
0°-40°	1967.8	14.2
0°-60°	3117.4	22.4
0°-90°	3665.4	26.4
90°-120°	1680.4	12.1
90°-150°	7429.9	53.5
90°-180°	10223.0	73.6
0°-180°	13887.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1779	1779	1779	1779	1779	
5°	1779	1771	1750	1765	1760	169
15°	1692	1675	1620	1589	1573	477
25°	1536	1484	1378	1312	1288	706
35°	1324	1242	1100	998	963	828
45°	1082	974	805	691	652	836
55°	823	697	523	427	396	735
65°	556	425	280	226	221	551
75°	296	184	129	118	116	313
85°	69	35	31	31	31	79
90°	2	30	50	63	68	13
95°	164	81	98	111	108	194
105°	767	843	154	182	192	820
115°	1451	1494	1557	389	207	1428
125°	2051	2084	2132	2150	2157	1829
135°	2538	2579	2601	2627	2622	1961
145°	2945	2942	2985	3002	2990	1842
155°	3242	3220	3250	3265	3245	1494
165°	3416	3401	3409	3426	3409	965
175°	3494	3477	3482	3500	3474	333
180°	3487	3487	3487	3487	3487	

TEST NUMBER: P920981

CATALOG NUMBER: DFN2DIP-TR4F0-050D120US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1779.3	1779.3	1779.3	1779.3	1779.3
2.5°	1787.3	1779.3	1761.5	1777.7	1774.4
5°	1779.3	1771.2	1750.2	1764.7	1760.0
7.5°	1764.7	1755.1	1732.6	1739.0	1730.9
10°	1745.4	1734.1	1702.0	1697.1	1687.5
12.5°	1721.3	1706.8	1663.3	1653.7	1635.9
15°	1692.3	1674.6	1619.9	1589.3	1573.2
17.5°	1658.5	1632.7	1565.0	1529.6	1503.8
20°	1619.9	1587.6	1507.1	1467.0	1431.4
22.5°	1578.0	1540.9	1447.5	1392.8	1368.7
25°	1536.1	1484.5	1378.3	1312.3	1288.1
27.5°	1486.3	1431.4	1313.9	1238.2	1201.2
30°	1433.1	1371.8	1243.0	1161.0	1117.4
32.5°	1381.6	1307.4	1175.5	1078.8	1038.5
35°	1323.6	1241.5	1099.8	998.3	962.9
37.5°	1267.2	1178.6	1029.0	917.7	877.6
40°	1207.6	1111.1	954.8	840.5	798.7
42.5°	1146.5	1043.4	880.8	761.6	721.4
45°	1082.1	974.1	805.1	690.7	652.0
47.5°	1020.9	906.6	732.7	618.3	582.9
50°	953.3	839.0	661.8	550.6	516.9
52.5°	887.2	766.4	594.2	487.9	457.4
55°	822.8	697.1	523.2	426.7	396.1
57.5°	756.8	628.0	460.5	370.4	344.6
60°	689.1	560.3	394.4	312.5	286.6
62.5°	623.2	494.4	338.1	260.9	248.1
65°	555.5	425.1	280.2	225.5	220.6
67.5°	491.1	360.7	225.5	198.0	193.2
70°	423.5	297.9	186.8	170.6	164.2
72.5°	359.1	239.9	156.2	143.4	140.1
75°	296.3	183.5	128.8	117.5	116.0
77.5°	233.5	130.4	101.5	95.0	91.7
80°	175.5	93.4	77.2	70.9	70.9
82.5°	122.3	62.9	53.1	49.9	49.9
85°	69.2	35.4	30.6	30.6	30.6
87.5°	25.8	12.8	12.8	11.3	11.3
90°	2.4	30.2	50.4	63.2	68.0
92.5°	63.2	53.0	60.5	65.6	68.0
95°	163.8	80.6	98.2	111.2	108.5
97.5°	295.2	88.4	128.5	136.3	138.7
100°	446.7	101.0	143.8	163.8	169.0
102.5°	613.0	608.2	148.9	176.5	184.3
105°	767.0	842.8	154.0	181.6	191.7
107.5°	946.2	1009.1	159.1	186.7	196.8
110°	1117.8	1170.6	441.6	189.3	199.2

TEST NUMBER: P920981

CATALOG NUMBER: DFN2DIP-TR4F0-050D120US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1279.4	1324.6	1281.8	194.2	201.9
115°	1450.7	1493.6	1556.8	388.6	207.1
117.5°	1599.6	1650.0	1693.2	1332.0	671.1
120°	1766.3	1804.0	1849.5	1879.8	1539.1
122.5°	1907.4	1947.8	1998.5	2013.4	2016.1
125°	2051.2	2084.1	2132.1	2149.7	2157.2
127.5°	2182.4	2217.8	2255.8	2281.0	2283.4
130°	2306.1	2346.6	2374.1	2402.0	2399.6
132.5°	2432.2	2465.2	2492.8	2515.6	2513.2
135°	2538.3	2578.8	2601.2	2626.7	2621.7
137.5°	2649.2	2679.4	2704.9	2730.1	2722.6
140°	2757.7	2778.0	2805.6	2828.4	2815.8
142.5°	2848.7	2866.4	2899.1	2919.1	2906.6
145°	2944.6	2941.9	2984.7	3002.5	2989.8
147.5°	3027.6	3020.1	3063.0	3075.6	3065.7
150°	3108.5	3090.8	3131.3	3146.3	3133.7
152.5°	3176.5	3156.4	3194.2	3209.5	3191.8
155°	3242.1	3219.6	3249.9	3264.9	3244.8
157.5°	3295.1	3275.1	3297.9	3315.5	3295.1
160°	3340.7	3325.4	3340.7	3355.7	3338.0
162.5°	3380.9	3365.9	3378.5	3396.1	3373.4
165°	3416.2	3401.2	3408.7	3426.4	3408.7
167.5°	3444.1	3428.8	3436.6	3454.2	3431.5
170°	3466.8	3451.6	3456.6	3474.3	3451.6
172.5°	3481.8	3466.8	3472.0	3489.6	3466.8
175°	3494.4	3476.7	3481.8	3499.5	3474.3
177.5°	3499.5	3481.8	3484.5	3502.2	3479.5
180°	3487.0	3487.0	3487.0	3487.0	3487.0

TEST NUMBER: P920981

CATALOG NUMBER: DFN2DIP-TR4F0-050D120US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.59	6.26	6.73	7.39	8.96	1.56	2.23	2.71	3.36	4.94
	3H	7.26	7.85	8.40	8.99	10.58	2.74	3.34	3.89	4.48	6.06
	4H	7.86	8.42	9.01	9.56	11.15	3.18	3.75	4.34	4.89	6.48
	6H	8.27	8.79	9.43	9.93	11.54	3.50	4.02	4.66	5.16	6.76
	8H	8.39	8.89	9.56	10.04	11.64	3.58	4.08	4.75	5.23	6.83
	12H	8.45	8.92	9.62	10.07	11.69	3.62	4.09	4.79	5.24	6.86
4H	2H	5.59	6.16	6.75	7.29	8.89	2.14	2.71	3.30	3.84	5.44
	3H	7.40	7.88	8.57	9.04	10.64	3.48	3.95	4.65	5.11	6.72
	4H	8.09	8.52	9.26	9.67	11.30	4.02	4.45	5.19	5.60	7.23
	6H	8.59	8.97	9.77	10.14	11.76	4.43	4.80	5.61	5.97	7.59
	8H	8.77	9.11	9.94	10.28	11.91	4.56	4.90	5.73	6.07	7.70
	12H	8.85	9.17	10.05	10.34	11.98	4.61	4.93	5.81	6.10	7.74
8H	4H	8.04	8.39	9.22	9.56	11.19	4.29	4.63	5.46	5.80	7.43
	6H	8.60	8.89	9.80	10.10	11.73	4.80	5.09	5.99	6.29	7.92
	8H	8.82	9.07	10.02	10.25	11.90	4.99	5.24	6.19	6.42	8.07
	12H	8.95	9.17	10.16	10.35	12.03	5.10	5.32	6.31	6.50	8.19
12H	4H	7.99	8.30	9.18	9.48	11.12	4.28	4.60	5.47	5.77	7.41
	6H	8.58	8.83	9.78	10.01	11.66	4.85	5.10	6.05	6.28	7.93
	8H	8.79	9.01	10.00	10.19	11.88	5.05	5.27	6.26	6.45	8.13

END OF REPORT